


SPM Series
SMT Power Metal Inductor
Size 3012


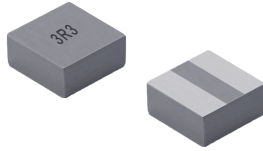


FEATURES

- Large current, Low DC-resistance, High efficiency by magnetic metal powder
- Low acoustic noise and low leakage flux noise by shielded construction
- AEC-Q200 Compliant
- Operating temperature: -40 °C ~125 °C
- Quantity: 1000 pcs/reel

Dimensions: [mm]

Land Pattern: [mm]

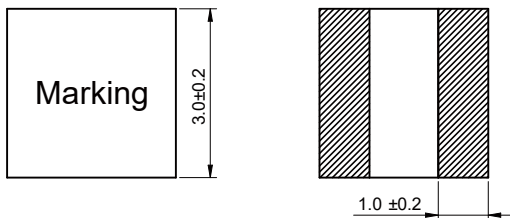

Electrical Properties:













Part No	Inductance (μH)	Tolerance	Temperature Rise Current Typ. (A)	Saturation Current Typ. (A)	DCR Max. (mΩ)	DCR Typ. (mΩ)
SPM3012-R33N	0.33	± 30%	3.4	11.1	22.8	19.0
SPM3012-R47N	0.47	± 30%	3.2	9.4	26.4	22.0
SPM3012-R56N	0.56	± 30%	3.0	8.5	34.8	29.0
SPM3012-R68N	0.68	± 30%	2.7	7.7	43.2	36.0
SPM3012-1R0M	1	± 20%	2.5	5.2	50.5	42.1
SPM3012-1R2M	1.2	± 20%	2.3	5.0	66.0	55.0
SPM3012-1R5M	1.5	± 20%	1.9	4.7	96.0	80.0
SPM3012-2R2M	2.2	± 20%	1.7	4.6	115.0	100.0
SPM3012-3R3M	3.3	± 20%	1.3	3.7	179.7	156.3
SPM3012-4R7M	4.7	± 20%	1.0	3.3	307.8	267.7
SPM3012-5R6M	5.6	± 20%	0.9	3.0	389.0	338.3
SPM3012-6R8M	6.8	± 20%	0.8	2.4	423.4	368.2

Inductance is measured at 100kHz, 1V

Temperature rise current: the actual value of DC current when the temperature rise is ΔT40 °C

Saturation Current that will cause initial inductance to drop approximately 20%

Typical Electrical Characteristics:

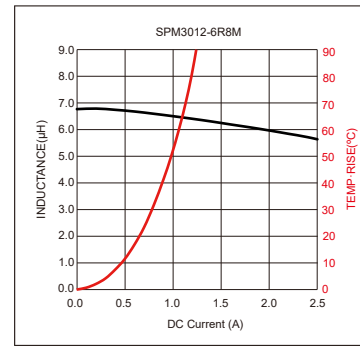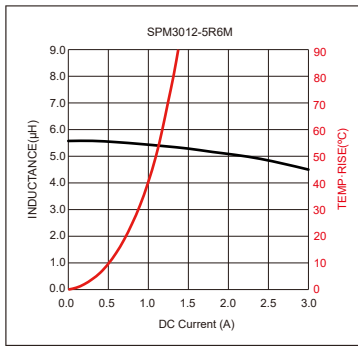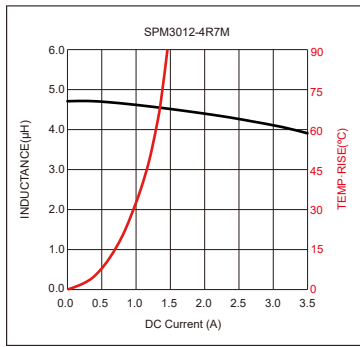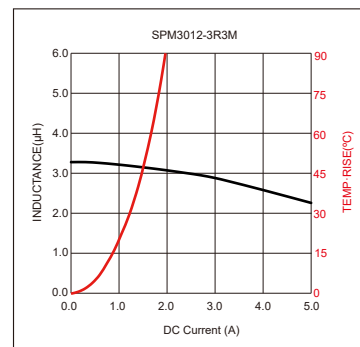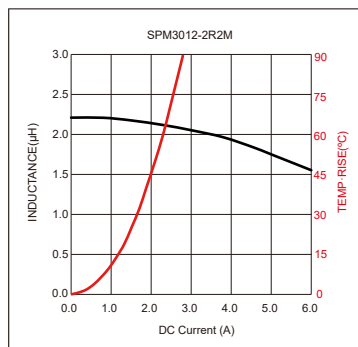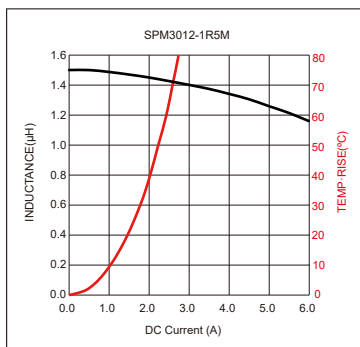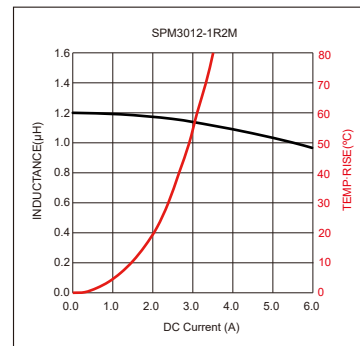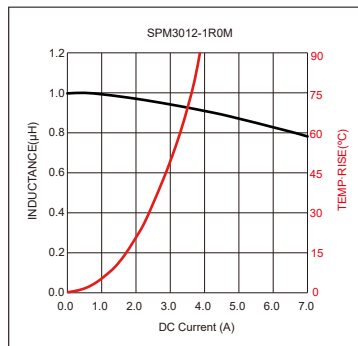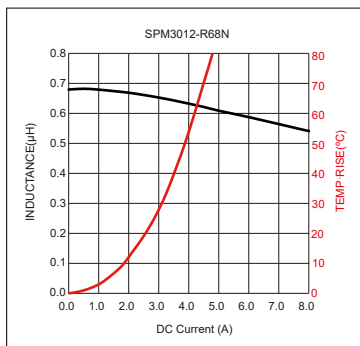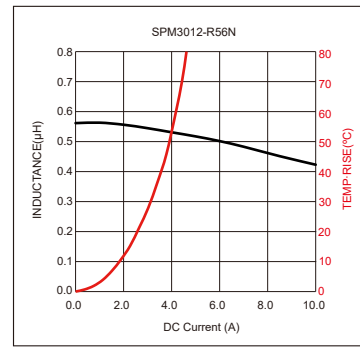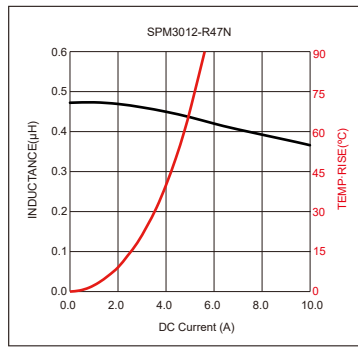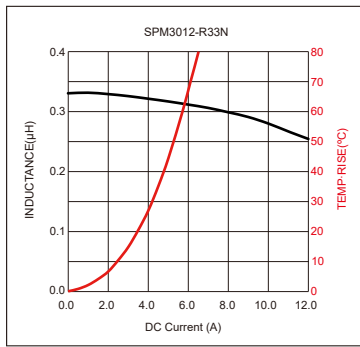

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [KOHER](#) manufacturer:

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHQ1005P10NJ](#)
[MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-](#)
[53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-](#)
[471XJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC3-R50-R](#) [HC8-1R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-](#)
[4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#)
[ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82498B3101J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#)