




PRECISION
SCREW
TIGHTENING

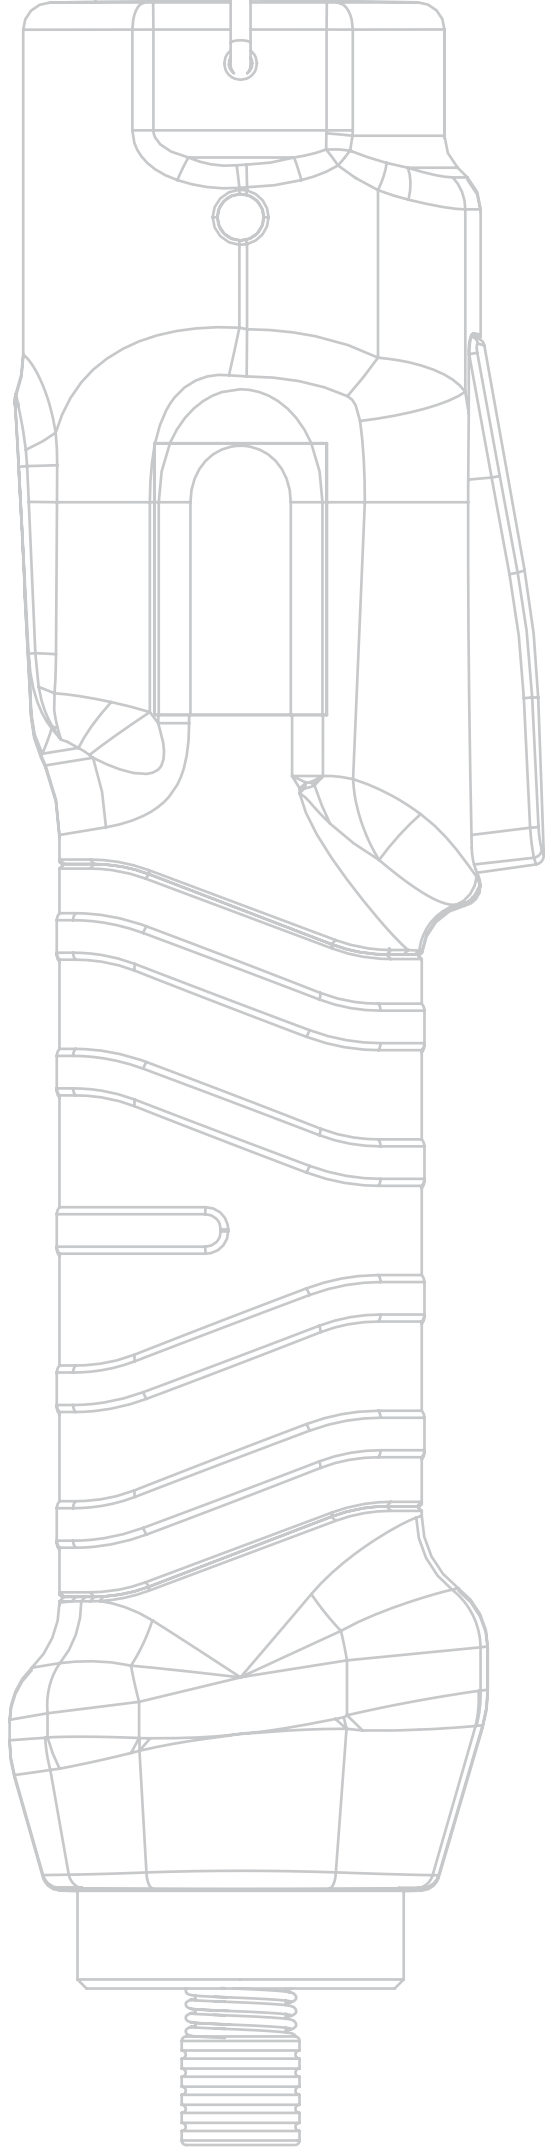


ELECTRIC SCREWDRIVERS

2020 Catalogue

KOLVER

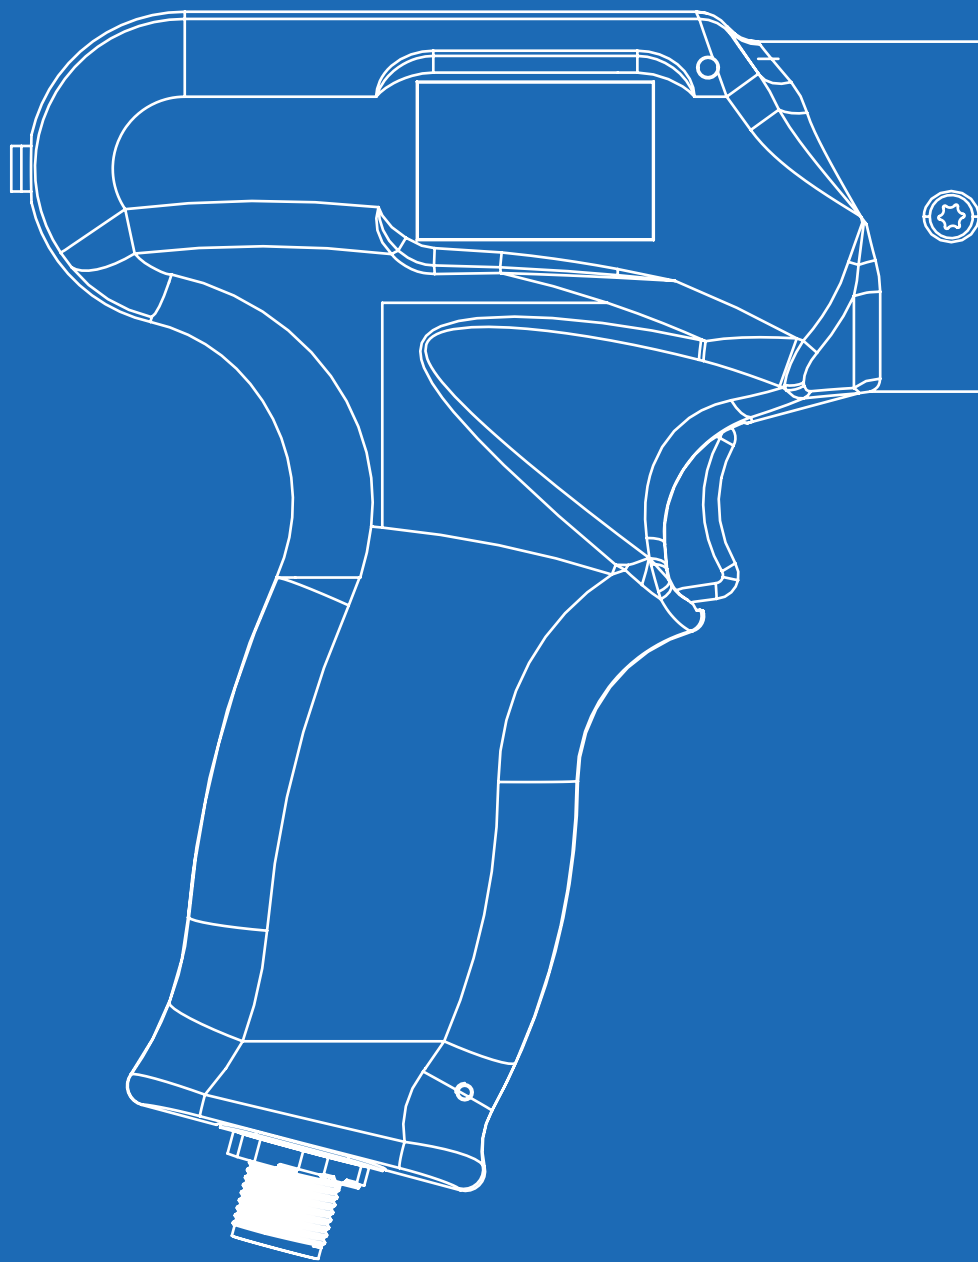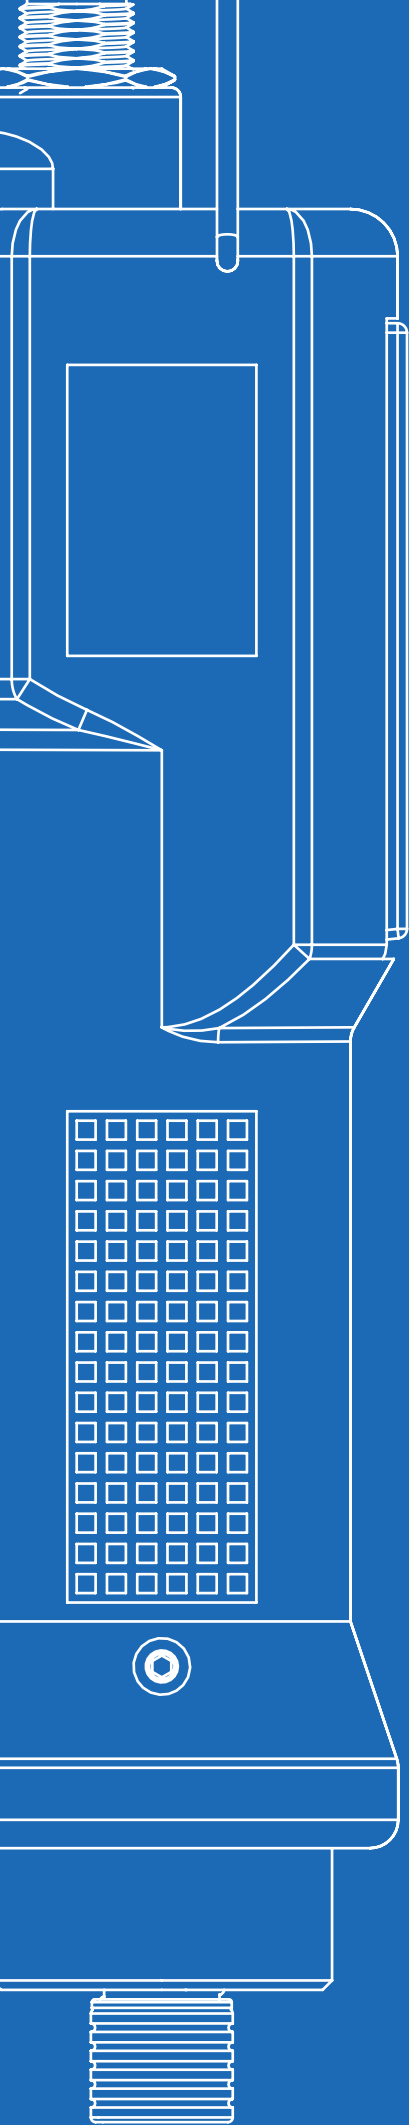

KOLVER

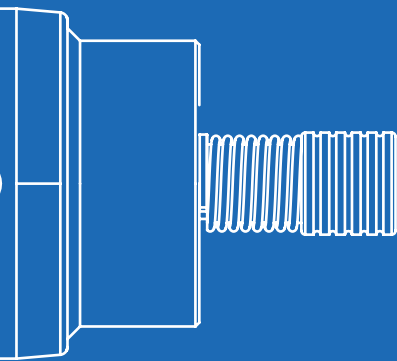

CONTENTS

TRANSDUCERIZED SCREWDRIVERS

| | |
|-------------------------------------|----|
| K-DUCER Transducerized Screwdrivers | 8 |
| KDU-1 Controllers | 10 |
| Cables | 12 |

CURRENT-CONTROLLED SCREWDRIVERS

| | |
|--|----|
| MITO Screwdrivers | 14 |
| PLUTO Hand-held Screwdrivers | 16 |
| EDU2AE Control Units | 18 |
| Torque & Angle Hand-held Screwdrivers | 20 |
| PLUTO Screwdrivers for Automation | 22 |
| Torque & Angle Screwdrivers for Automation | 24 |

CLUTCH SCREWDRIVERS

| | |
|---------------------------------|----|
| PLUTO Clutch Screwdrivers | 28 |
| FAB & RAF Screwdrivers | 30 |
| KBL Brushless Screwdrivers | 32 |
| KBL Screwdrivers for Automation | 34 |
| ACC Screwdrivers | 36 |

TORQUE TESTERS / SCREW FEEDERS

REACTION ARMS / POSITIONING SYSTEMS

| | |
|--------------------------------------|----|
| K and Mini K/S Series Torque Testers | 38 |
| Torque Reaction Arms | 40 |
| Positioning Arms | 42 |
| NFK Screw Feeders | 44 |

ACCESSORIES


| | |
|--------------------|----|
| FAB & RAF Series | 46 |
| KBL Series | 47 |
| PLUTO Series | 48 |
| PLUTO CA Series | 49 |
| MITO & NATO Series | 50 |
| Control Units | 51 |



Kolver's History

30 Years of success

Simple, accurate, cost effective, their design was so good they are still popular.



FAB & RAF Series reach the market

1989

1998

1992

Kolver: a star is born



At the time Kolver was founded, the market was dominated by air tools. Few people believed in electric tools – we went all in.

A Year of Firsts



The first ISO9000 Certification

The first electric screwdriver manufacturing company to be certified.

The first ESD-safe driver in the world

We were the first and remained unequalled in the market for 4 years.


KOLVER Srl is currently one of the major players in the global market of electric screwdrivers for industry. Founded in 1989, KOLVER has soon taken the leadership in the European market of precision electric screwdrivers for industry. Thousands of state-of-the-art drivers are produced every year in Italy and then shipped to more than 30 Countries worldwide. Product innovation, rigorous respect for man and his environment and fast and accurate service have been the key factors of KOLVER's success.

Our famous PLUTO Series was launched in 2000 and since then it has been often imitated, but never duplicated.



PLUTO Screwdrivers set a new standard

The introduction of K-DUCER screwdrivers marks a turning point – fully Industry 4.0 ready, K-DUCER represents the next generation of screw tightening.




K-DUCER is the new challenge

2011

2000

2019

The MITO Range joins the family



Specifically designed for high-precision applications, MITO tools were born to guarantee the same flexibility of current-controlled screwdrivers even on low torques.



KOLVER: MORE QUALITY THAN YOU MAY EVER NEED



You've got an assembly job to do, and there are a lot of people counting on you to get it done right. At KOLVER, we know what you are looking for. We deliver the most innovative and cost-effective electric fastening systems in the industry and that's why our tools have countless happy users and... pale imitators worldwide!

KOLVER solutions represent the true answer to your assembly needs. ISO 9001 certified since 1998, Kolver's mission has always been to fulfill customers' expectations, delivering the right quality products at the right time, at the right price.

About 50% of the products in our catalogue have been launched or upgraded during the last 3 years. Clutch tools, current-control tools, transducerized tools: in-line, pistol, angle and fixtured, along with controllers and software in an outstanding combination of ergonomics, performance, error proofing and durability.

Kolver range helps you maximize your productivity and stay ahead of your competition.

| SERIES | CLUTCH TOOLS | TORQUE & ANGLE CURRENT CONTROL | TORQUE & ANGLE TRANSDUCERIZED | TORQUE RANGE Nm | TORQUE RANGE in.lbs |
|--------|--------------|--------------------------------|-------------------------------|-----------------|---------------------|
| FAB | • | | | 0.05 - 1.8 | 0.44 - 15.9 |
| RAF | • | | | 0.7 - 5.0 | 6.2 - 44.25 |
| KBL | • | | | 0.04 - 4.0 | 0.35 - 35.4 |
| ACC | • | | | 0.2 - 4.5 | 1.77 - 39.8 |
| NATO | | • | | 0.01 - 0.5 | 0.09 - 4.4 |
| MITO | | • | | 0.2 - 1.5 | 1.8 - 13.3 |
| PLUTO | • | • | | 0.5 - 70 | 4.4 - 664 |
| KDS | | | • | 0.5 - 15 | 4.4 - 132.8 |

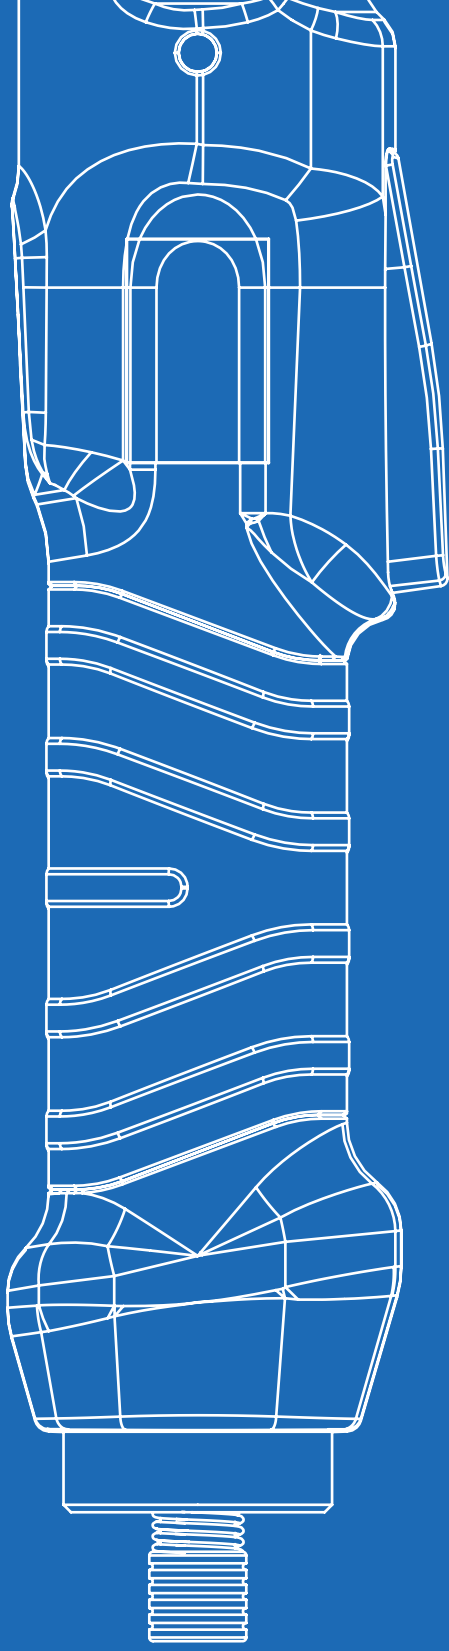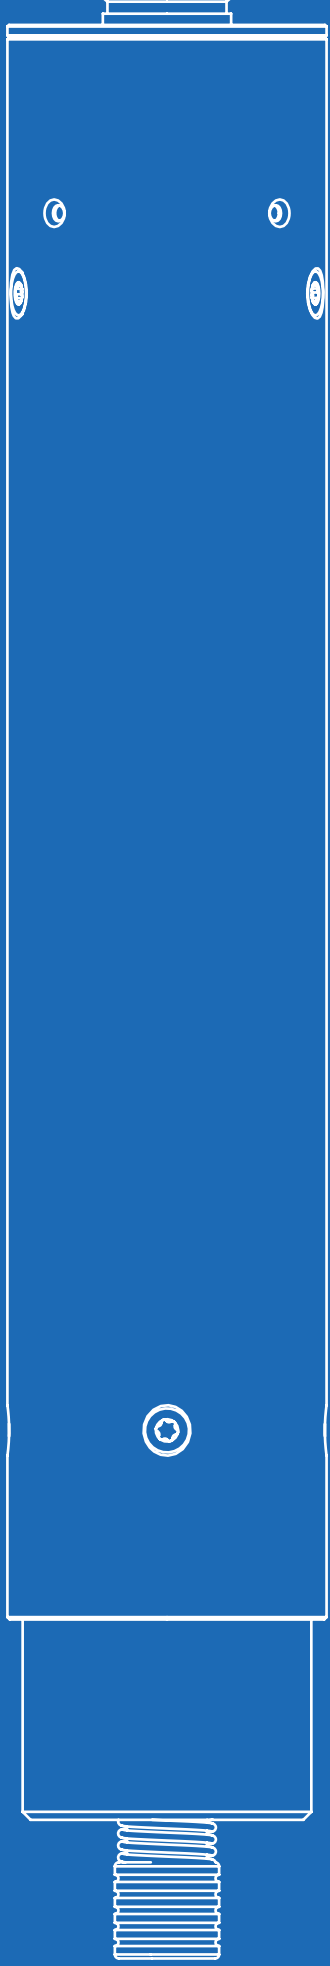

TRANSDUCERIZED SCREWDRIVERS



K-DUCER Transducerized Screwdrivers | Torque range 0.1 – 15 Nm

K-Ducer is the new A-class intelligent transducerized assembly system from Kolver, the electric tool pioneer since 1989. The system consists of an advanced state-of-the-art controller and a range of handheld and fixtured electric screwdrivers with torque up to 15 Nm (to be extended to 50 Nm soon).

Finest accuracy and precision

KDS transducerized electric tools cover all assembly line requirements for an accurate, high-quality torque and angle-controlled tightening experience.

A built-in compact transducer provides torque control with excellent repeatability.

Excellent ergonomics

KDS screwdrivers feature unsurpassed ergonomics, soft touch design, status LED, temperature protection combined with full traceability and error-proofing capabilities.

Available in straight, pistol and fixture configuration.

Connectivity and Industry 4.0

KDS tools are the ideal solution for your Industry 4.0 production line. Built-in LED lights give you immediate feedback on each tightening process, i.e. you'll be able to check at a glance whether the part is correctly tightened or not.

KDS screwdrivers work in combination with KDU control units to gather, analyse and process detailed assembly information.

Their built-in transducer continuously reads torque and position of the screw and sends the gathered data to the KDU controller for analysis.

Available Housings



INLINE (KDS-PL) – Inline versions available in lever start. ESD-safe option available on models KDS-PL/ESD.



PISTOL GRIP – Trigger start, pistol grip available with top connector (KDS-PL P/U) or bottom connector (KDS-PL P). Also available in ESD-safe option (KDS-PL P/ESD and KDS-PL P/U/ESD).



ALUMINIUM BODY (KDS-PL CA) – Specifically designed for automation. Easy to install on any machine or robot. Version with flange mount available



Inline KDS Screwdrivers

| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Weight kg | Bit Drive |
|--------|-----------|-----------|-------------|---------------|-----------|-----------|
| 175015 | KDS-MT1.5 | 0.1 - 1.5 | 50 - 850 | 254 x 52 | 0.7 | Hex 1/4" |
| 135006 | KDS-PL6 | 0.5 - 6 | 50 - 850 | 251 x 52 | 0.7 | Hex 1/4" |
| 135010 | KDS-PL10 | 0.8 - 10 | 50 - 600 | 251 x 52 | 0.7 | Hex 1/4" |
| 135015 | KDS-PL15 | 0.5 - 15 | 50 - 320 | 251 x 52 | 0.7 | Hex 1/4" |

Pistol grip KDS Screwdrivers

| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Weight kg | Bit Drive |
|--------|------------|-----------|-------------|----------------|-----------|-----------|
| 175016 | KDS-MT1.5P | 0.1 - 1.5 | 50 - 850 | 186 x 172 x 50 | 0.7 | Hex 1/4" |
| 135007 | KDS-PL6P | 0.5 - 6 | 50 - 850 | 186 x 170 x 50 | 0.7 | Hex 1/4" |
| 135011 | KDS-PL10P | 0.8 - 10 | 50 - 600 | 186 x 170 x 50 | 0.7 | Hex 1/4" |
| 135016 | KDS-PL15P | 0.5 - 15 | 50 - 320 | 186 x 170 x 50 | 0.7 | Hex 1/4" |

Inline KDS Screwdrivers in ESD-safe housing

| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Weight kg | Bit Drive |
|------------|---------------|-----------|-------------|---------------|-----------|-----------|
| 175015/ESD | KDS-MT1.5/ESD | 0.1 - 1.5 | 50 - 850 | 254 x 52 | 0.7 | Hex 1/4" |
| 135006/ESD | KDS-PL6/ESD | 0.5 - 6 | 50 - 850 | 251 x 52 | 0.7 | Hex 1/4" |
| 135010/ESD | KDS-PL10/ESD | 0.8 - 10 | 50 - 600 | 251 x 52 | 0.7 | Hex 1/4" |
| 135015/ESD | KDS-PL15/ESD | 0.5 - 15 | 50 - 320 | 251 x 52 | 0.7 | Hex 1/4" |

Pistol grip KDS Screwdrivers in ESD-safe housing

| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Weight kg | Bit Drive |
|------------|----------------|-----------|-------------|----------------|-----------|-----------|
| 175016/ESD | KDS-MT1.5P/ESD | 0.1 - 1.5 | 50 - 850 | 186 x 172 x 50 | 0.7 | Hex 1/4" |
| 135007/ESD | KDS-PL6P/ESD | 0.5 - 6 | 50 - 850 | 186 x 170 x 50 | 0.7 | Hex 1/4" |
| 135011/ESD | KDS-PL10P/ESD | 0.8 - 10 | 50 - 600 | 186 x 170 x 50 | 0.7 | Hex 1/4" |
| 135016/ESD | KDS-PL15P/ESD | 0.5 - 15 | 50 - 320 | 186 x 170 x 50 | 0.7 | Hex 1/4" |

Aluminium housing KDS Screwdrivers

| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Weight kg | Bit Drive |
|--------|-------------|-----------|-------------|---------------|-----------|-----------|
| 175115 | KDS-MT1.5CA | 0.1 - 1.5 | 50 - 850 | 237 x 40 | 0.9 | Hex 1/4" |
| 135106 | KDS-PL6CA | 0.5 - 6 | 50 - 850 | 248 x 40 | 0.9 | Hex 1/4" |
| 135110 | KDS-PL10CA | 0.8 - 10 | 50 - 600 | 248 x 40 | 0.9 | Hex 1/4" |
| 135115 | KDS-PL15CA | 0.5 - 15 | 50 - 320 | 248 x 40 | 0.9 | Hex 1/4" |

Aluminium housing KDS Screwdrivers with flange mount

| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Weight kg | Bit Drive |
|-----------|----------------|-----------|-------------|---------------|-----------|-----------|
| 175115/FN | KDS-MT1.5CA/FN | 0.1 - 1.5 | 50 - 850 | 316 x 40 | 1.1 | Sq 3/8" |
| 135106/FN | KDS-PL6CA/FN | 0.5 - 6 | 50 - 850 | 350 x 40 | 1.1 | Sq 3/8" |
| 135110/FN | KDS-PL10CA/FN | 0.8 - 10 | 50 - 600 | 350 x 40 | 1.1 | Sq 3/8" |
| 135115/FN | KDS-PL15CA/FN | 0.5 - 15 | 50 - 320 | 350 x 40 | 1.1 | Sq 3/8" |

Angle head KDS Screwdrivers

| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Weight kg | Bit Drive |
|----------|--------------|-----------|-------------|---------------|-----------|-----------|
| 135006/A | KDS-PL6/ANG | 0.5 - 5.5 | 50 - 850 | 288 x 52 | 0.7 | Hex 1/4" |
| 135010/A | KDS-PL10/ANG | 0.8 - 9 | 50 - 600 | 288 x 52 | 0.7 | Hex 1/4" |
| 135015/A | KDS-PL15/ANG | 0.5 - 14 | 50 - 320 | 326 x 52 | 0.9 | Sq 3/8" |

IMPORTANT: Continuous use over 80% of torque range is not recommended.

KDS Screwdrivers work in combination with KDU series controllers. See page 10 for further information.



KDU-1 Controllers | K-Ducer Power Units

The KDU-1 Series of controllers give you full control of your fastening operation in an industry leading compact size.

Features

With features like touch screen color display, multiple programs and sequences, intuitive programming interface, torque and angle control and graphs output, the KDU-1 units provide unmatched performance and value.

Easy to use

Set-up and operation are really an easy task. Units may be programmed either through the touch screen or via a PC software.

Different models, plenty of options

The power unit comes in two versions depending on the functionality level required.

The KDU-1 basic unit includes serial and USB ports.

In addition to that, KDU-1A advanced controllers feature a Modbus TCP communication port.

Most communication protocols are available with the support of external modules. Wi-fi is also an additional option.

KDU controllers will operate all KDS series of tools.

Connectivity and Industry 4.0

Industry 4.0 – The Fourth Industrial Revolution – is driving the evolution of the assembly process. The digitalization of manufacturing and assembly means shifting the way we look at manufacturing in terms of production optimization and automation.

The more informed you are, the better decisions you can make. Having smart tools on your line means that you have specific tightening information fed into the production system – information concerning critical details of your components, materials and tightening process.

This provides a valuable opportunity to increase efficiency and results in pro-active problem solving, alongside with considerable energy savings from efficiency improvements.

Optional supports

A table stand or wall mount are available for KDU units.

Wall mounts can be easily installed on any vertical surface and allow KDU controllers to tilt up/down and left/right – place your KDU unit anywhere and adjust its position to best suit your needs.

A table stand ensures quick access to cables when placing your KDU unit on a flat surface. It is the best option in case you'd like to keep your KDU controller right at hand.





Table Stand



Wall Bracket

Supports for KDU control units

| Code | Model | Description |
|--------|----------------------------|------------------------|
| 010400 | Table stand | For table use |
| 010401 | Wall mount tilting bracket | For wall or column use |



Controllers for Transducerized Screwdrivers / **K-DUCER Series**


| Features | KDU-1 Basic | KDU-1A Advanced |
|------------------------|----------------|--------------------|
| 5" Touch Screen | • | • |
| Number of programs | 64 | 64 |
| Sequences | 8 | 8 |
| 20 Input NPN | • | • |
| 21 Outputs | • | • |
| Torque graph | • | • |
| Bar code reading | • | • |
| Torque & angle control | • | • |
| Multiple parameters | • | • |
| RS 232 (2) | • | • |
| Mini USB | • | • |
| USB | • | • |
| Modbus TCP | | • |
| Devicenet | | + |
| CC-Link | | + |
| Profibus | | + |
| Ethernet / IP | | + |
| Profinet | | + |
| Profinet FO | | + |
| Ethercat | | + |
| CC-Link IE Field | | + |
| Powerlink | | + |

+ = available as a separate module interface to Modbus




Cables | K-Ducer Screwdrivers and Control Units

Cables are required to complete any K-Ducer system, as they connect KDS screwdrivers to KDU control units. They're made of sturdy materials to guarantee exceptional resistance to wear and tear. Also, they're superquick to connect thanks to their one-click connector. Two different lengths (2.5 m and 5 m) are available to meet any production requirement.





Driver connector (KDS view)



Unit connector (KDU view)

Cables to connect KDS screwdrivers to KDU units

| Code | Model | Description |
|----------|-------------------------|-----------------|
| 250064 | Cable 2.5 m | M16 10pin 2.5 m |
| 250064/H | Cable 2.5 m, heavy duty | M16 10pin 2.5 m |
| 250564 | Cable 5 m | M16 10pin 5 m |
| 250564/H | Cable 5 m, heavy duty | M16 10pin 5 m |

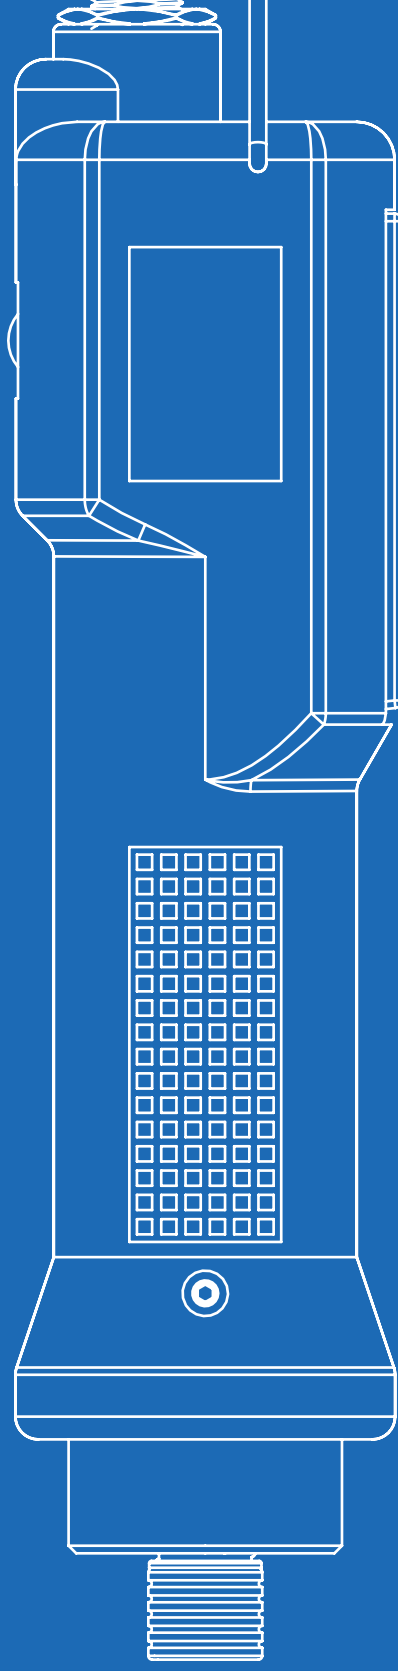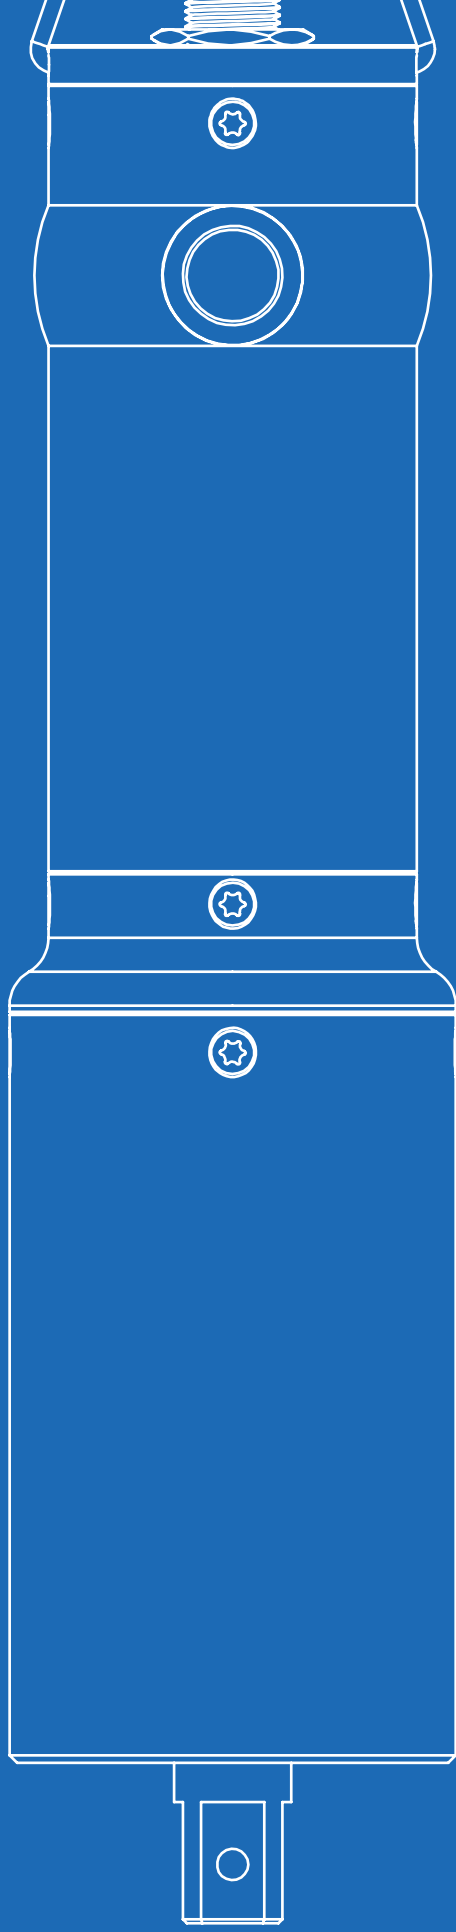

CURRENT-CONTROLLED SCREWDRIVERS



MITO Screwdrivers | Torque range 0.35 – 1.5 Nm

MITO screwdrivers are the ideal solution for high-precision low torques. Their accurate and smooth torque control makes them perfect for the mobile, watchmaking and eyewear industry.

Precise low-torque screwdrivers

Kolver's experience with current-controlled technology has led to the creation of the MITO series; truly accurate current-controlled torque drivers designed for applications in which torques below 1.5 Nm are required.

Long-lasting accuracy

MITO drivers feature an innovative electric motor coupled with planetary gearboxes, producing extremely low inertia and minimal friction for long life and very accurate torque production.

Compact ergonomic design

All MITO screwdrivers feature an ESD-safe housing, either in hand-held option or aluminium body for automation.

MITO drivers are available in pistol or inline style, catering to operator preference and comfort.

Foot pedals are available in cases where the operator would like the convenience of manual operation with the MITO/CA series.

Available Housings



INLINE (MITO..D) – Inline versions available in lever start, current-controlled style.



PISTOL GRIP – Trigger start, pistol grip available with top connector (MITO15P/U) or bottom connector (MITO15P).



ALUMINIUM BODY (MITO..CA) – For automation, they can also be used with foot pedals for manual operations. Also available with flange mount.





Inline MITO Screwdrivers

| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Weight kg | Bit Drive |
|--------|---------|------------|-------------|---------------|-----------|-----------|
| 170015 | MITO15D | 0.35 - 1.5 | 450 - 850 | 216 x 33 | 0.35 | Hex 1/4" |

Pistol grip MITO Screwdrivers

| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Weight kg | Connector Option |
|----------|-----------|------------|-------------|----------------|-----------|------------------|
| 170014 | MITO15P | 0.35 - 1.5 | 450 - 850 | 159 x 195 x 45 | 0.50 | Bottom connector |
| 170014/U | MITO15P/U | 0.35 - 1.5 | 450 - 850 | 163 x 195 x 45 | 0.50 | Top connector |

Aluminium housing MITO Screwdrivers


| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Weight kg | Bit Drive |
|--------------------------------|-------------|------------|-------------|---------------|-----------|-----------|
| 170016 | MITO15CA | 0.35 - 1.5 | 450 - 850 | 193 x 32 | 0.36 | Hex 1/4" |
| Model with flange mount | | | | | | |
| 170016/FN | MITO15CA/FN | 0.35 - 1.5 | 450 - 850 | 271 x 33 | 1.3 | Hex 1/4" |

Control units for MITO Screwdrivers

| Code | Model | Single Program | Torque Value in Nm | Serial Port | Multitorque (8 P-sets) | USB Port | PC Software | Weight kg | Dimensions mm |
|--------------|--------------|----------------|--------------------|-------------|------------------------|----------|-------------|-----------|-----------------|
| 032000 | EDU2AE | • | - | - | - | - | - | 2.40 | 195 x 170 x 110 |
| 032000/HPRO | EDU2AE/HPRO | • | • | • | - | - | - | 2.40 | 195 x 170 x 110 |
| 032000/TOP | EDU2AE/TOP | - | • | • | • | - | - | 2.50 | 190 x 205 x 120 |
| 032000/TOP/E | EDU2AE/TOP/E | - | • | • | • | • | • | 2.50 | 190 x 205 x 120 |

See page 18 for a complete list of features.

IMPORTANT: Continuous use over 80% of torque range is not recommended.

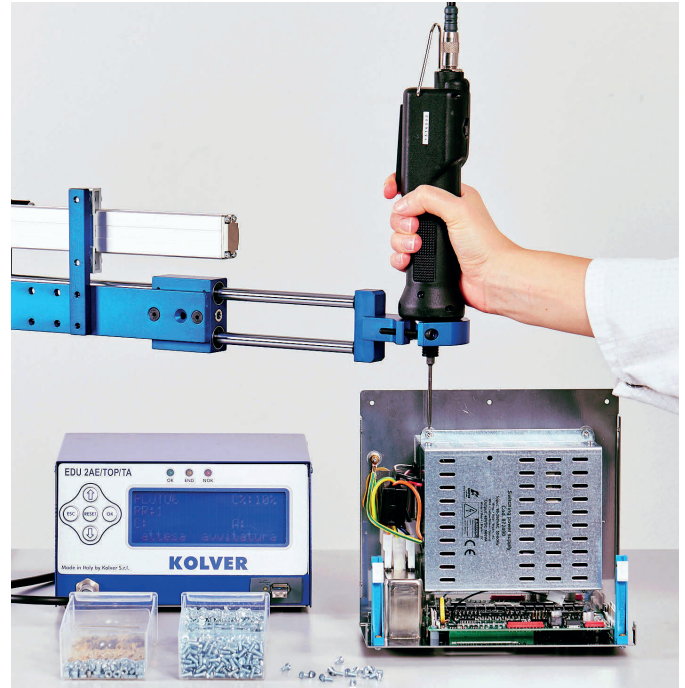

PLUTO Hand-held Screwdrivers | Torque range 0.5 – 70 Nm

PLUTO® (PLUs TORque) are among the most advanced DC tools in the assembly market. Priced at the same level as obsolete air tools, PLUTO® screwdrivers are available in plenty of options to meet any assembly requirement.

Extremely versatile

PLUTO® Series screwdrivers feature a wide torque range: starting at 0.5 Nm with PLUTO3, they reach up to 70 Nm with PLUTO70ANG. Pick the one that best suits your application among the many current-controlled models.

Also, you can handle up to 8 different joints by connecting your PLUTO screwdriver to one of our EDU2AE/TOP multiprogram control units (see page 18).

Precise and accurate

High performances are guaranteed on any type of joint. PLUTO® current-controlled tools can reach 70 Nm with a repeatability of +/-5% with a unique electronic torque control system.

Long-lasting quality

PLUTO® Screwdrivers feature an innovative coreless motor with low inertia and friction and absence of iron losses for extreme efficiency and extended life.

Planetary gearboxes are made of high-quality composite materials for excellent accuracy and repeatability throughout the wide 0.5 - 70 Nm torque range.

Highest environmental protection requirements

- Low energy consumption
- No polluting emissions
- Low noise level
- Minimal vibrations
- ESD-safe

Available Housings



INLINE (PLUTO..D) – Inline versions available in lever start. Current-controlled style. Bit Drive: 1/4" hex quick change chuck. Available with reduced front ring upon request.



PISTOL GRIP – Trigger start, pistol grip available with top connector (PLUTO..P/U) or bottom connector (PLUTO..P). Current-controlled style. Bit Drive: 1/4" hex quick change chuck



ALUMINIUM BODY (PLUTO..CA/SR) – For 20+ Nm torque models. Current-controlled style. With start and reverse buttons.



ANGLE MODELS (PLUTO..ANG) – Inline models with angle head attached. Current-controlled style.



ESD-safe housing



Inline PLUTO Screwdrivers

| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Weight kg | Bit Drive |
|----------|------------|-----------|-------------|---------------|-----------|-----------|
| 130203 | PLUTO3D | 0.5 - 3 | 370 - 1300 | 226 x 40 | 0.55 | Hex 1/4" |
| 130206 | PLUTO6D | 0.85 - 6 | 200 - 850 | 226 x 40 | 0.55 | Hex 1/4" |
| 130211/N | PLUTO10D/N | 1.5 - 10 | 110 - 600 | 226 x 40 | 0.55 | Hex 1/4" |
| 130216/N | PLUTO15D/N | 2.0 - 15 | 60 - 320 | 226 x 40 | 0.60 | Hex 1/4" |

Pistol grip PLUTO Screwdrivers

| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Weight kg | Connector Option |
|------------|--------------|-----------|-------------|----------------|-----------|------------------|
| 130204 | PLUTO3P | 0.5 - 3 | 370 - 1300 | 159 x 174 x 45 | 0.55 | Bottom connector |
| 130205 | PLUTO3P/U | 0.5 - 3 | 370 - 1300 | 163 x 174 x 45 | 0.55 | Top connector |
| 130207 | PLUTO6P | 0.85 - 6 | 200 - 850 | 159 x 174 x 45 | 0.55 | Bottom connector |
| 130207/U | PLUTO6P/U | 0.85 - 6 | 200 - 850 | 163 x 174 x 45 | 0.55 | Top connector |
| 130210/N | PLUTO10P/N | 1.5 - 10 | 110 - 600 | 159 x 174 x 45 | 0.55 | Bottom connector |
| 130210/U/N | PLUTO10P/U/N | 1.5 - 10 | 110 - 600 | 163 x 174 x 45 | 0.55 | Top connector |
| 130215/N | PLUTO15P/N | 2.0 - 15 | 60 - 320 | 159 x 174 x 45 | 0.55 | Bottom connector |
| 130215/U/N | PLUTO15P/U/N | 2.0 - 15 | 60 - 320 | 163 x 174 x 45 | 0.55 | Top connector |

Aluminium body PLUTO Screwdrivers

| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Weight kg | Bit Drive |
|-----------|--------------|-----------|-------------|---------------|-----------|-----------|
| 133221/SR | PLUTO20CA/SR | 3.0 - 20 | 50 - 200 | 232 x 53 | 1.10 | Sq 3/8" |
| 133236/SR | PLUTO35CA/SR | 3.0 - 35 | 40 - 140 | 247 x 57 | 1.50 | Sq 3/8" |
| 133250/SR | PLUTO50CA/SR | 5.0 - 50 | 20 - 90 | 252 x 57 | 1.50 | Sq 1/2" |

Angle head PLUTO Screwdrivers

| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Bit Drive | Start Option |
|----------|------------|-----------|-------------|---------------|-----------|-----------------------|
| 130203/A | PLUTO3ANG | 0.5 - 2.5 | 370 - 1300 | 261 x 40 | Hex 1/4" | Lever start |
| 130206/A | PLUTO6ANG | 1.0 - 6 | 200 - 850 | 261 x 40 | Hex 1/4" | Lever start |
| 130208 | PLUTO8ANG | 1.5 - 8 | 110 - 600 | 261 x 40 | Hex 1/4" | Lever start |
| 130216/A | PLUTO15ANG | 2.0 - 13 | 100 - 320 | 286 x 40 | Sq 3/8" | Lever start |
| 133220 | PLUTO20ANG | 3.0 - 18 | 60 - 200 | 302 x 40 | Sq 3/8" | Start/Reverse Buttons |
| 133231 | PLUTO30ANG | 6.0 - 30 | 30 - 130 | 435 x 54 | Sq 3/8" | Start/Reverse Buttons |
| 133245 | PLUTO45ANG | 10 - 45 | 20 - 90 | 445 x 57 | Sq 1/2" | Start/Reverse Buttons |
| 133270 | PLUTO70ANG | 15 - 70 | 20 - 50 | 458 x 57 | Sq 1/2" | Start/Reverse Buttons |

Control units for PLUTO Screwdrivers

| Code | Model | Single Program | Torque Value in Nm | Serial Port | Multitorque (8 P-sets) | USB Port | PC Software | Weight kg | Dimensions mm |
|--------------|--------------|----------------|--------------------|-------------|------------------------|----------|-------------|-----------|-----------------|
| 032000 | EDU2AE | • | - | - | - | - | - | 2.40 | 195 x 170 x 110 |
| 032000/HPRO | EDU2AE/HPRO | • | • | • | - | - | - | 2.40 | 195 x 170 x 110 |
| 032000/TOP | EDU2AE/TOP | - | • | • | • | - | - | 2.50 | 190 x 205 x 120 |
| 032000/TOP/E | EDU2AE/TOP/E | - | • | • | • | • | • | 2.50 | 190 x 205 x 120 |

See page 18 for a complete list of features.

IMPORTANT: Continuous use over 80% of torque range is not recommended.



EDU2AE Control Units | For PLUTO and MITO Screwdrivers

EDU2AE control units are meant to be used in combination with Kolver current controlled MITO and PLUTO and/or clutch PLUTO screwdrivers. EDU2AE series switching controllers act as an AC to DC transformer and torque controller. The electronic control circuit cuts the power supply to the motor as soon as the pre-set torque has been reached.

Universal usage

All units are equipped with a high power switching transformer with 90-260 V AC power supply for universal usage. EDU2AE control units are multilanguage: you can choose among English, Italian, German, French, Portuguese or Spanish.

Single & Multi-Torque

Choose the control unit that best suits your requirements among our single-torque controllers or multi-torque. Multi-torque control units are designed to expand the functionality of PLUTO screwdrivers by enabling multiple torque settings (up to 8) using one controller and one driver.

Extremely accurate

Thanks to the latest state-of-the-art advanced software for torque controlling it is now possible to reach the most accurate results with CM / CMK values higher than ever. The combination of the software and switching transformer allows the MITO & PLUTO screwdrivers to reach a +/- 5% precision all over the torque range.

Better endurance

All units comply to norms 61000-6-2 and 61000-6-3, and therefore have better endurance in environments with high noise and interference levels. Improved EMC features are guaranteed thanks to their solid steel base and back panel.

Connectivity and Industry 4.0

All functions can be set and controlled via user interface screens or remotely via 15 input and 11 output connectors. A wide range of accessories for remote programming and PC interface is available for the complete EDU2AE series (see page 51). EDU2AE/TOPI/E and EDU2AE/TOPI/TA come standard with the EXPAND software package to set, change and save all parameters via USB key & PC.

EDU2AE & Screwdriver Series Combination

| Control units | Screwdriver models | |
|--|--|--|
| | Hand-held | Automation |
| EDU2AE EDU2AE/HPRO EDU2AE/TOP EDU2AE/TOPI/E | MITO D MITO P PLUTO D, D/N PLUTO P, P/N PLUTO P/U, P/U/N PLUTO CA/SR PLUTO ANG PLUTO ANG/SR | MITO CA MITO CA/FN PLUTO CA PLUTO CA/FN PLUTO CA/FN2 |
| EDU2AE/TOPI/TA | MITO D/TA PLUTO D/TA PLUTO D/TA/LED PLUTO P/TA PLUTO CA/SR/TA | MITO CA/TA PLUTO CA/TA PLUTO CA/FN/TA PLUTO CA/FN2/TA |



Control Units for PLUTO & MITO Screwdrivers / **EDU2AE Series**

| Features | EDU2AE | EDU2AE/FR | EDU2AE/HPRO | EDU2AE/TOP | EDU2AE/TOP/E | EDU2AE/TOP/TA |
|--|--------|-----------|-------------|------------|--------------|---------------|
| Switching power supply | • | • | • | • | • | • |
| Settable Torque percentage | • | | • | • | • | • |
| Ramp and Speed settings | • | • | • | • | • | • |
| Speed 1 and Speed 2 settings | • | | • | • | • | • |
| Min/max or infinite time settings | • | • | • | • | • | • |
| Auto reverse | • | • | • | • | • | • |
| Pre Reverse | | | • | • | • | • |
| Settable loosening speed | • | | • | • | • | • |
| Settable loosening torque | • | | • | • | • | • |
| Run time | • | • | • | • | • | • |
| Prevailing torque | | | • | • | • | • |
| Clockwise/anticlockwise tightening | | | • | • | • | • |
| Password protected | | • | • | • | • | • |
| Calibration | | | • | • | • | • |
| Nm - lb/in - Kgf.cm selection | | | • | • | • | • |
| Settable Min/max torque | | | • | • | • | • |
| Screw count and end cycle signal | • | • | • | • | • | • |
| Screw reset | | | | • | • | • |
| Program reset | | • | • | • | • | • |
| Sequence reset | | | • | • | • | • |
| Multitorque | | | | • | • | • |
| Lever error | | | • | • | • | • |
| Enable/Disable loosening | | | • | • | • | • |
| Barcode | | | • | • | • | • |
| Serial print | | • | • | • | • | • |
| Error, motor on and correct screw signals | • | • | • | • | • | • |
| Optional screwdriver connector on back panel | | • | • | | | |
| Multilanguage | • | • | • | • | • | • |
| Use with DOCK04 double output connector | | | | • | • | • |
| Use with PRNTR1 serial printer | | • | • | • | • | • |
| Printing options for each program | | | | • | • | • |
| Use with TLS1 | • | • | • | • | • | • |
| >> w/ automatic program switch | | | | • | • | • |
| PC programming (EDU EXPAND software) | | | | | • | • |
| USB flash drive & port | | | | | • | • |



Torque & Angle Hand-held Screwdrivers | Torque range 0.05 – 50 Nm

Industrial tightening requires precise control strategies. TA systems feature Torque and Angle monitoring, making it possible to manage both torque and rotation angle of the screw.

The Torque/Angle Control


The main parameters to be controlled are the tightening torque and the rotation angle of the screw, either with torque or angle priority. The screwdriver stops automatically when the pre-set angle and torque value have been reached and an indication of OK cycle (green led turned on) is given, otherwise a red led turns on if the tightened screw doesn't match the pre-set parameters. The final torque and angle values are also displayed.

Main features

- 'EDU Expand' software for remote programming via USB port and PC.
- USB port on front panel for uploading and downloading programs.
- Easy to program user interface screens.
- Password protected.
- Torque value in Nm, lbf.in and kgf.cm.
- Angle value in degrees.
- 8 independent programs including the options:
 - Min/Max torque value.
 - Min/Max angle value.
 - Rundown speed.
 - Slow start/Soft stop.
 - Hard/soft joint.
 - Min/Max rundown time.
 - Prevailing torque (threadcutting).
 - Auto reverse if required.
- 6 Torque & Angle strategies:
 - Torque priority: angle count from torque threshold (T) or from remote input (T/I) or from lever input (T/L).
 - Angle priority: driver stops when angle is reached from threshold torque (A) or from remote input (A/I) or from lever (A/L).

EDU2AE/TOP/TA Torque and Angle Functionalities


Torque Mode



It's the most common mode. If the final torque and angle values are within the pre-set minimum and maximum values, the screw is tightened correctly and the controller will give an OK message.

If the torque and/or angle are outside the pre-set values, the screw will be considered incorrectly tightened and the controller will give an error message.

Angle Mode



This mode gives priority to the angle to be reached. Starting from the pre-set threshold torque, the system will start counting the degrees and when the pre-set angle is reached the screwdriver will stop.

The control unit will give an OK or NOK message depending on whether the screw is tightened correctly or not. It is also possible to set minimum and maximum values within which the set angle must be reached.





Inline TA Screwdrivers

| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Weight kg | Bit Drive |
|-----------------------------------|-----------------|------------|-------------|---------------|-----------|-----------|
| 160050/TA | NATO50D/TA | 0.05 - 0.5 | 200 - 700 | 210 x 33 | 0.25 | Hex 1/4" |
| 170015/TA | MITO15D/TA | 0.35 - 1.5 | 450 - 850 | 216 x 33 | 0.35 | Hex 1/4" |
| 130203/TA | PLUTO3D/TA | 0.5 - 3 | 370 - 1300 | 226 x 40 | 0.55 | Hex 1/4" |
| 130206/TA | PLUTO6D/TA | 0.85 - 6 | 200 - 850 | 226 x 40 | 0.55 | Hex 1/4" |
| 130211/TA | PLUTO10D/TA | 1.5 - 10 | 110 - 600 | 226 x 40 | 0.55 | Hex 1/4" |
| 130216/TA | PLUTO15D/TA | 2.0 - 15 | 60 - 320 | 226 x 40 | 0.55 | Hex 1/4" |
| Models with LED light ring | | | | | | |
| 130203/TA/LED | PLUTO3D/TA/LED | 0.5 - 3 | 370 - 1300 | 226 x 40 | 0.55 | Hex 1/4" |
| 130206/TA/LED | PLUTO6D/TA/LED | 0.85 - 6 | 200 - 850 | 226 x 40 | 0.55 | Hex 1/4" |
| 130211/TA/LED | PLUTO10D/TA/LED | 1.5 - 10 | 110 - 600 | 226 x 40 | 0.55 | Hex 1/4" |
| 130216/TA/LED | PLUTO15D/TA/LED | 2.0 - 15 | 60 - 320 | 226 x 40 | 0.55 | Hex 1/4" |

Pistol grip TA Screwdrivers

| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Weight kg | Connector Option |
|-------------|---------------|-----------|-------------|----------------|-----------|------------------|
| 130204/TA | PLUTO3P/TA | 0.5 - 3 | 370 - 1300 | 159 x 174 x 45 | 0.55 | Bottom connector |
| 130205/TA | PLUTO3P/U/TA | 0.5 - 3 | 370 - 1300 | 163 x 174 x 45 | 0.55 | Top connector |
| 130207/TA | PLUTO6P/TA | 0.85 - 6 | 200 - 850 | 159 x 174 x 45 | 0.55 | Bottom connector |
| 130207/U/TA | PLUTO6P/U/TA | 0.85 - 6 | 200 - 850 | 163 x 174 x 45 | 0.55 | Top connector |
| 130210/TA | PLUTO10P/TA | 1.5 - 10 | 110 - 600 | 159 x 174 x 45 | 0.55 | Bottom connector |
| 130210/U/TA | PLUTO10P/U/TA | 1.5 - 10 | 110 - 600 | 163 x 174 x 45 | 0.55 | Top connector |
| 130215/TA | PLUTO15P/TA | 2.0 - 15 | 60 - 320 | 159 x 174 x 45 | 0.55 | Bottom connector |
| 130215/U/TA | PLUTO15P/U/TA | 2.0 - 15 | 60 - 320 | 163 x 174 x 45 | 0.55 | Top connector |

Aluminium body TA Screwdrivers

| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Weight kg | Bit Drive |
|--------------|-----------------|-----------|-------------|---------------|-----------|-----------|
| 133221/SR/TA | PLUTO20CA/SR/TA | 3.0 - 20 | 50 - 200 | 232 x 53 | 1.10 | Sq 3/8" |
| 133236/SR/TA | PLUTO35CA/SR/TA | 3.0 - 35 | 40 - 140 | 247 x 57 | 1.50 | Sq 3/8" |
| 133250/SR/TA | PLUTO50CA/SR/TA | 5.0 - 50 | 20 - 90 | 252 x 57 | 1.50 | Sq 1/2" |

Angle head TA Screwdrivers

| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Bit Drive | Start Option |
|-------------|---------------|-----------|-------------|---------------|-----------|--------------|
| 130203/A/TA | PLUTO3ANG/TA | 0.5 - 2.5 | 370 - 1300 | 286 x 40 | Hex 1/4" | Lever start |
| 130206/A/TA | PLUTO6ANG/TA | 1.0 - 6 | 200 - 850 | 286 x 40 | Hex 1/4" | Lever start |
| 130208/TA | PLUTO8ANG/TA | 1.5 - 8 | 110 - 600 | 286 x 40 | Hex 1/4" | Lever start |
| 130216/A/TA | PLUTO15ANG/TA | 2.0 - 13 | 100 - 320 | 286 x 40 | Hex 1/4" | Lever start |

Control units for TA Screwdrivers

| Code | Model | NATO TA Series | PLUTO, MITO TA Series | Serial Port | Multitorque (8 P-sets) | Computer Interface | Torque & Angle | Weight kg | Dimensions mm |
|------------------|------------------|----------------|-----------------------|-------------|------------------------|--------------------|----------------|-----------|-----------------|
| 031000/TOP/NT/TA | EDU2AE/TOP/NT/TA | • | - | • | • | • | • | 2.00 | 190 x 205 x 120 |
| 032000/TOP/TA | EDU2AE/TOP/TA | - | • | • | • | • | • | 2.50 | 190 x 205 x 120 |

See page 18 for a complete list of features.

IMPORTANT: Continuous use over 80% of torque range is not recommended.



PLUTO Screwdrivers for Automation | Torque range 0.5 – 50 Nm

PLUTO CA screwdrivers are designed for automated and fixtured applications. Whether you're working with a robot or adapting your assembly line to Industry 4.0 standards, we have the right solution for automation in all its forms.

Long-lasting quality

PLUTO® Screwdrivers feature an innovative coreless motor with low inertia and friction and absence of iron losses for extreme efficiency and extended life.

Planetary gearboxes are made of high-quality composite materials for excellent accuracy and repeatability throughout the wide 0.5 - 50 Nm torque range.

Perfect for automatic machines

PLUTO CA are supplied in an aluminium body for a quick and easy integration with automatic machines and screwfeeding systems. PLUTO tools in CA/FN version are equipped with a flange mount and reciprocating spindle for high volume/high duty applications.

Robotic applications

Our PLUTO CA screwdrivers can be easily interfaced with robots. The EDU2AE screwdriver controller connects to robots to determine screw speed, torque and time out. The controller sends a signal to the robot when the screw reaches the specified torque.

Industry 4.0 ready

Simply connect the screwdriver controller to your PLC, robot or machine through the proper connectors to manage input/output signals such as start, stop, error and more.

You can also get data reports of the full tightening procedure on advanced control units like EDU2AE/TOP/E and EDU2AE/TOP/TA.

Available Housings



ALUMINIUM BODY (PLUTO CA and PLUTO CA/N) – Specifically designed for automation. Easy to install on any machine or robot.



ALUMINIUM BODY WITH FLANGE MOUNT (PLUTO CA/FN and PLUTO CA/FN2) – Ideal for automated high volume/high duty applications. Flange and telescopic spindle available together or separately.



Robotic application
SCAN TO WATCH



ESD-safe housing



Aluminium housing PLUTO Screwdrivers

| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Weight kg | Bit Drive |
|----------|-------------|-----------|-------------|---------------|-----------|-----------|
| 130303 | PLUTO3CA | 0.5 - 3 | 370 - 1300 | 168 x 40 | 0.50 | Hex 1/4" |
| 133206 | PLUTO6CA | 0.85 - 6 | 200 - 850 | 168 x 40 | 0.50 | Hex 1/4" |
| 133211/N | PLUTO10CA/N | 1.5 - 10 | 110 - 600 | 168 x 40 | 0.50 | Hex 1/4" |
| 133216/N | PLUTO15CA/N | 2.0 - 15 | 60 - 320 | 168 x 40 | 0.50 | Hex 1/4" |
| 133221 | PLUTO20CA | 3.0 - 20 | 50 - 200 | 232 x 47 | 1.10 | Sq 3/8" |
| 133236 | PLUTO35CA | 3.0 - 35 | 40 - 140 | 247 x 57 | 1.50 | Sq 3/8" |
| 133250 | PLUTO50CA | 5.0 - 50 | 20 - 90 | 252 x 57 | 1.50 | Sq 1/2" |

Aluminium housing PLUTO Screwdrivers with flange mount

| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Weight kg | Bit Drive |
|------------|---------------|-----------|-------------|---------------|-----------|-----------|
| 130303/FN2 | PLUTO3CA/FN2 | 0.5 - 3 | 370 - 1300 | 268 x 40 | 0.70 | Sq 3/8" |
| 133206/FN2 | PLUTO6CA/FN2 | 0.85 - 6 | 200 - 850 | 268 x 40 | 0.70 | Sq 3/8" |
| 133211/FN2 | PLUTO10CA/FN2 | 1.5 - 10 | 110 - 600 | 268 x 40 | 0.70 | Sq 3/8" |
| 133216/FN2 | PLUTO15CA/FN2 | 2.0 - 15 | 60 - 320 | 268 x 40 | 0.70 | Sq 3/8" |
| 133221/FN | PLUTO20CA/FN | 3.0 - 20 | 50 - 200 | 323 x 47 | 1.35 | Sq 3/8" |
| 133236/FN | PLUTO35CA/FN | 3.0 - 35 | 40 - 140 | 338 x 57 | 1.95 | Sq 3/8" |
| 133250/FN | PLUTO50CA/FN | 5.0 - 50 | 20 - 90 | 351 x 57 | 1.95 | Sq 1/2" |

Control units for PLUTO Screwdrivers

| Code | Model | Single Program | Torque Value in Nm | Serial Port | Multitorque (8 P-sets) | USB Port | PC Software | Weight kg | Dimensions mm |
|--------------|--------------|----------------|--------------------|-------------|------------------------|----------|-------------|-----------|-----------------|
| 032000 | EDU2AE | • | - | - | - | - | - | 2.40 | 195 x 170 x 110 |
| 032000/HPRO | EDU2AE/HPRO | • | • | • | - | - | - | 2.40 | 195 x 170 x 110 |
| 032000/TOP | EDU2AE/TOP | - | • | • | • | - | - | 2.50 | 190 x 205 x 120 |
| 032000/TOP/E | EDU2AE/TOP/E | - | • | • | • | • | • | 2.50 | 190 x 205 x 120 |

See page 18 for a complete list of features.

IMPORTANT: Continuous use over 80% of torque range is not recommended.



Torque & Angle Screwdrivers for Automation | Torque range 0.05 – 50 Nm

Automation requires accurate torque controlling techniques. TA automated systems feature advanced monitoring strategies such as torque and rotation angle of the screw, for precise torque and angle control on all automated operations.

The Torque/Angle Control

The main parameters to be controlled are the tightening torque and the rotation angle of the screw, either with torque or angle priority. The screwdriver stops automatically when the pre-set angle and torque value have been reached and an indication of OK cycle (green led turned on) is given, otherwise a red led turns on if the tightened screw doesn't match the pre-set parameters. The final torque and angle values are also displayed.

Easy interface

TA Screwdrivers work in combination with EDU2AE/TOP/TA control units, which allow to set, change and save all parameters via PC, USB key and a wide range of I/O connections for an easy interface with your PLC, robot or machine.

Plenty of options

PLUTO, MITO and NATO automated torque & angle screwdrivers cover a wide torque range of 0.1-50 Nm: choose the tool that best suits your application and set the desired working cycle through TOP/TA control units. You can set 8 independent programs either directly on control unit or remotely.

TA automated screwdrivers give you total control over automated applications.

Industry 4.0


Interconnection, automatic control and continuous monitoring are fundamental aspects of Industry 4.0.

Through EDU2AE/TOP/TA control units you can easily manage input and output signals such as start, stop, error and more.

You can also get data reports of the full tightening procedure on PC, USB key or serial connection.

EDU2AE/TOP/TA Torque and Angle Functionalities


Torque Mode



It's the most common mode. If the final torque and angle values are within the pre-set minimum and maximum values, the screw is tightened correctly and the controller will give an OK message.

If the torque and/or angle are outside the pre-set values, the screw will be considered incorrectly tightened and the controller will give an error message.

Angle Mode



This mode gives priority to the angle to be reached. Starting from the pre-set threshold torque, the system will start counting the degrees and when the pre-set angle is reached the screwdriver will stop.

The control unit will give an OK or NOK message depending on whether the screw is tightened correctly or not. It is also possible to set minimum and maximum values within which the set angle must be reached.





Aluminium housing TA Screwdrivers

| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Weight kg | Bit Drive |
|-----------|--------------|------------|-------------|---------------|-----------|-----------|
| 163050/TA | NATO50CA/TA | 0.05 - 0.5 | 200 - 700 | 150 x 25 | 0.18 | Hex 1/4" |
| 170016/TA | MITO15CA/TA | 0.35 - 1.5 | 450 - 850 | 193 x 32 | 0.36 | Hex 1/4" |
| 130303/TA | PLUTO3CA/TA | 0.5 - 3 | 370 - 1300 | 168 x 40 | 0.50 | Hex 1/4" |
| 133206/TA | PLUTO6CA/TA | 0.85 - 6 | 200 - 850 | 168 x 40 | 0.50 | Hex 1/4" |
| 133211/TA | PLUTO10CA/TA | 1.5 - 10 | 110 - 600 | 168 x 40 | 0.50 | Hex 1/4" |
| 133216/TA | PLUTO15CA/TA | 2.0 - 15 | 60 - 320 | 168 x 40 | 0.50 | Hex 1/4" |
| 133221/TA | PLUTO20CA/TA | 3.0 - 20 | 50 - 200 | 232 x 47 | 1.10 | Sq 3/8" |
| 133236/TA | PLUTO35CA/TA | 3.0 - 35 | 40 - 140 | 247 x 57 | 1.50 | Sq 3/8" |
| 133250/TA | PLUTO50CA/TA | 5.0 - 50 | 20 - 90 | 252 x 57 | 1.50 | Sq 1/2" |

Aluminium housing TA Screwdrivers with flange mount

| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Weight kg | Bit Drive |
|---------------|------------------|-----------|-------------|---------------|-----------|-----------|
| 130303/FN2/TA | PLUTO3CA/FN2/TA | 0.5 - 3 | 370 - 1300 | 268 x 40 | 0.70 | Sq 3/8" |
| 133206/FN2/TA | PLUTO6CA/FN2/TA | 0.85 - 6 | 200 - 850 | 268 x 40 | 0.70 | Sq 3/8" |
| 133211/FN2/TA | PLUTO10CA/FN2/TA | 1.5 - 10 | 110 - 600 | 268 x 40 | 0.70 | Sq 3/8" |
| 133216/FN2/TA | PLUTO15CA/FN2/TA | 2.0 - 15 | 60 - 320 | 268 x 40 | 0.70 | Sq 3/8" |
| 133221/FN/TA | PLUTO20CA/FN/TA | 3.0 - 20 | 50 - 200 | 323 x 47 | 1.35 | Sq 3/8" |
| 133236/FN/TA | PLUTO35CA/FN/TA | 3.0 - 35 | 40 - 140 | 338 x 57 | 1.95 | Sq 3/8" |
| 133250/FN/TA | PLUTO50CA/FN/TA | 5.0 - 50 | 20 - 90 | 351 x 57 | 1.95 | Sq 1/2" |

Control units for TA Screwdrivers

| Code | Model | NATO TA Series | PLUTO, MITO TA Series | Serial Port | Multitorque (8 P-sets) | Computer Interface | Torque & Angle | Weight kg | Dimensions mm |
|------------------|------------------|----------------|-----------------------|-------------|------------------------|--------------------|----------------|-----------|-----------------|
| 031000/TOP/NT/TA | EDU2AE/TOP/NT/TA | • | - | • | • | • | • | 2.00 | 190 x 205 x 120 |
| 032000/TOP/TA | EDU2AE/TOP/TA | - | • | • | • | • | • | 2.50 | 190 x 205 x 120 |

See page 18 for a complete list of features.

IMPORTANT: Continuous use over 80% of torque range is not recommended.



THE BENEFITS OF CURRENT-CONTROLLED SCREWDRIVERS

The MITO & PLUTO screwdriver range is the most advanced current-controlled tightening solution for torque applications up to 70 Nm. Extremely ergonomic, compact and full of functionalities, it is the right tool to boost productivity, resulting in high efficiency and cost reduction.



The MITO & PLUTO system is flexible and provides clear operator feedback. All MITO & PLUTO screwdrivers are ESD (electrostatic discharge) approved to guarantee the best quality, no matter the requirement of the surroundings.

KOLVER's Current-controlled solution means:


- High accuracy, normally better than +/-10%, Cmk always better than 1.66
- Torque and angle control and monitoring
- Ergonomic and lightweight design
- Multiple communication ports

Benefits of KOLVER's current-controlled tools:

- The best price to quality ratio
- Secure product quality
- Direct error detection and error proofing
- Reduction of missing screws and stripped joints
- Improved process control and reduced setup time
- Industry 4.0 ready

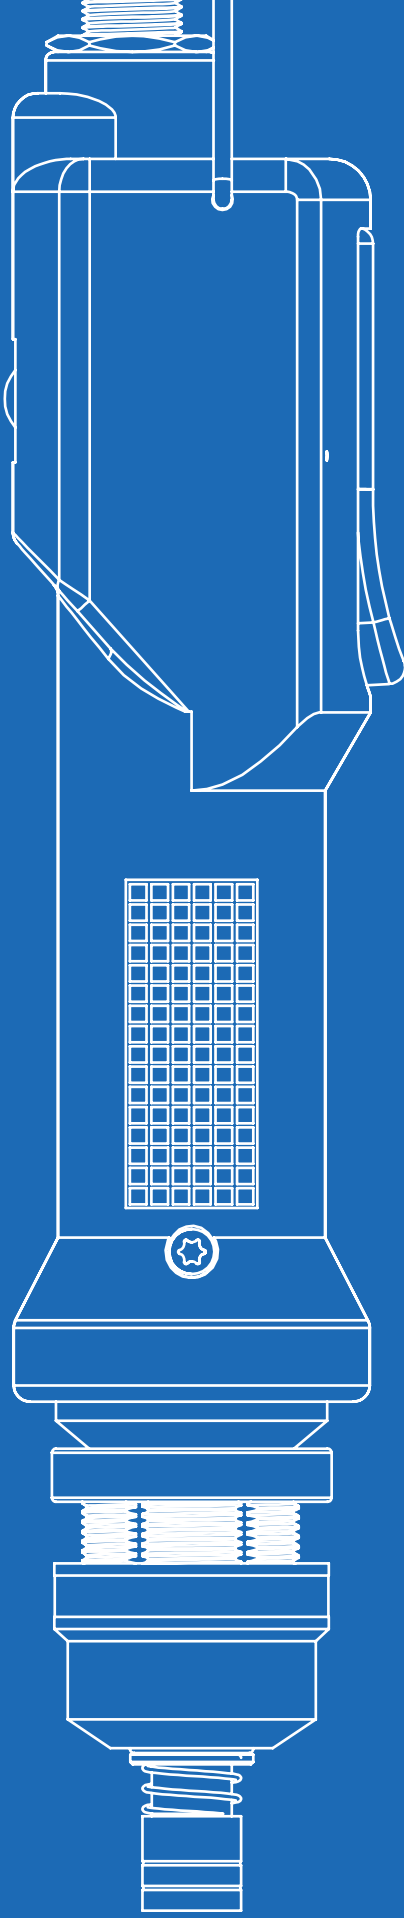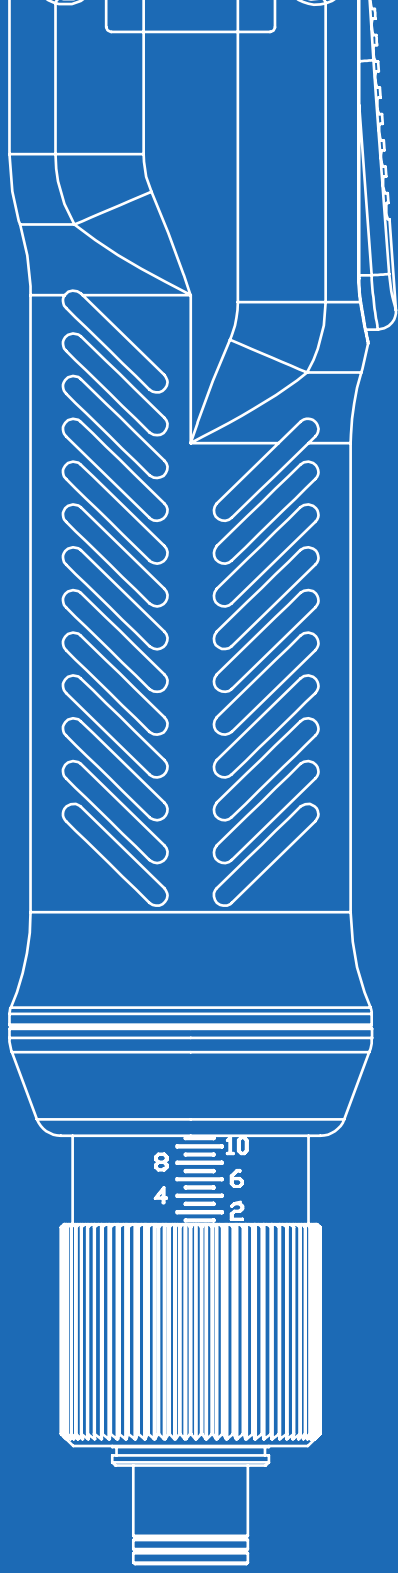

CLUTCH SCREWDRIVERS

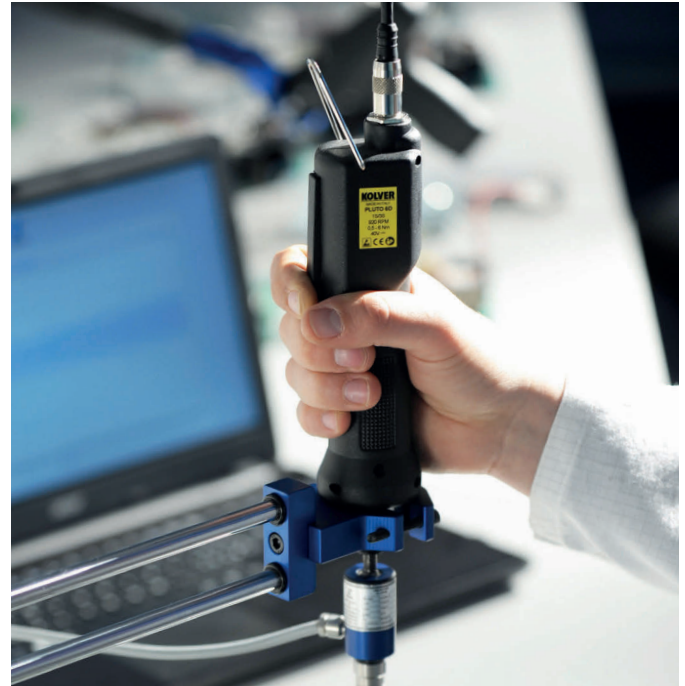

PLUTO Clutch Screwdrivers | Torque range 0.5 – 7 Nm

PLUTO® (PLU TOorque) clutch screwdrivers combine the versatility of PLUTO tools with the precision of clutch screwdrivers.

Precise and accurate

High performances are guaranteed on any type of joint. PLUTO® clutch models ensure an excellent accuracy on the whole torque range.

Long-lasting quality

PLUTO® Screwdrivers feature an innovative coreless motor with low inertia and friction and absence of iron losses for extreme efficiency and extended life. Planetary gearboxes and clutches are made of high-quality composite materials for excellent accuracy and repeatability throughout the whole torque range.

Hand-held and fixture mount models

PLUTO FR are available in inline or pistol grip ESD-safe housing. Angle attachments for hand-held tools are also available. PLUTO FR/CA are supplied in an aluminium body for a quick and easy integration with automatic machines and screwfeeding systems. PLUTO tools in CA/FN version are equipped with a flange mount and reciprocating spindle for high volume/high duty applications.

Specific control unit

Any PLUTO FR operates with a specific control unit, model EDU2AE/FR. It is designed to best run PLUTO FR screwdrivers, with the addition of some high-end features such as password protection and serial print.

Highest environmental protection requirements

- Low energy consumption
- No polluting emissions
- Low noise level
- Minimal vibrations
- ESD-safe

Available Housings



INLINE (PLUTO..FR) – Inline versions available in lever start. Clutch style.
Bit Drive: 1/4" hex quick change chuck



PISTOL GRIP – Trigger start, pistol grip available with top connector (PLUTO FR/P/U) or bottom connector (PLUTO FR/P). Clutch style.
Bit Drive: 1/4" hex quick change chuck



ANGLE MODELS (PLUTO FR/ANG) – Inline models with angle head attached. Clutch style.



ALUMINIUM BODY (PLUTO FR/CA and PLUTO FR/CA/FN) – Specifically designed for automation. Easy to install on any machine or robot. Flange and telescopic spindle for automated high volume/high duty applications available together or separately.



ESD-safe housing



Inline PLUTO Clutch Screwdrivers

| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Weight kg | Output |
|-----------|-------------|-----------|-------------|---------------|-----------|----------|
| 131203/HS | PLUTO3FR/HS | 0.5 - 2.8 | 1550 - 2400 | 259 x 40 | 0.55 | Hex 1/4" |
| 131205 | PLUTO5FR | 1 - 5 | 600 - 1000 | 274 x 40 | 0.55 | Hex 1/4" |
| 131207 | PLUTO7FR | 1.5 - 7 | 350 - 600 | 274 x 40 | 0.55 | Hex 1/4" |

Pistol grip PLUTO Clutch Screwdrivers

| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Weight kg | Connector Option |
|-------------|-----------------|-----------|-------------|----------------|-----------|------------------|
| 131204/HS | PLUTO3FR/P/HS | 0.5 - 2.8 | 1550 - 2400 | 158 x 224 x 45 | 0.55 | Bottom connector |
| 131204/U/HS | PLUTO3FR/P/U/HS | 0.5 - 2.8 | 1550 - 2400 | 163 x 232 x 45 | 0.55 | Top connector |
| 131206 | PLUTO5FR/P | 1 - 5 | 600 - 1000 | 158 x 224 x 45 | 0.55 | Bottom connector |
| 131206/U | PLUTO5FR/P/U | 1 - 5 | 600 - 1000 | 163 x 232 x 45 | 0.55 | Top connector |
| 131208 | PLUTO7FR/P | 1.5 - 7 | 350 - 600 | 158 x 224 x 45 | 0.55 | Bottom connector |
| 131208/U | PLUTO7FR/P/U | 1.5 - 7 | 350 - 600 | 163 x 232 x 45 | 0.55 | Top connector |

Angle head PLUTO Clutch Screwdrivers

| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Output | Start Option |
|----------|--------------|-----------|-------------|---------------|----------|--------------|
| 131205/A | PLUTO5FR/ANG | 1 - 5 | 600 - 1000 | 336 x 40 | Hex 1/4" | Lever start |
| 131207/A | PLUTO7FR/ANG | 1.5 - 7 | 350 - 600 | 336 x 40 | Hex 1/4" | Lever start |

Aluminium housing PLUTO Clutch Screwdrivers

| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Weight kg | Output |
|-----------|----------------|-----------|-------------|---------------|-----------|----------|
| 133203/HS | PLUTO3FR/CA/HS | 0.5 - 2.8 | 1550 - 2400 | 252 x 40 | 0.75 | Hex 1/4" |
| 133205 | PLUTO5FR/CA | 1 - 5 | 600 - 1000 | 252 x 40 | 0.75 | Hex 1/4" |
| 133207 | PLUTO7FR/CA | 1.5 - 7 | 350 - 600 | 252 x 40 | 0.75 | Hex 1/4" |

Aluminium housing PLUTO Clutch Screwdrivers with Flange Mount

| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Weight kg | Output |
|-----------|----------------|-----------|-------------|---------------|-----------|----------|
| 133205/FN | PLUTO5FR/CA/FN | 1 - 5 | 600 - 1000 | 328 x 40 | 0.80 | Hex 1/4" |
| 133207/FN | PLUTO7FR/CA/FN | 1.5 - 7 | 350 - 600 | 328 x 40 | 0.80 | Hex 1/4" |

IMPORTANT: Continuous use over 80% of torque range is not recommended.

PLUTO Screwdrivers work in combination with EDU2AE/FR controllers. See page 18 for further information.



FAB & RAF Screwdrivers | Torque range 0.05 – 5 Nm

FAB & RAF screwdrivers have been well-known in the electronic industry since we first developed them in the early 1990s. FAB and RAF series are Kolver's powerful, reliable and truly cost-effective tools.

Quick to set up, easy to use

FAB and RAF tools are incredibly easy to install and operate. The torque is set externally: you'll only have to turn the clutch adjusting nut according to the required torque setting. Each screwdriver works in combination with a control unit. Its electronic control circuit cuts the power supply to the screwdriver motor in response to the clutch action as soon as the pre-set torque has been reached.

Simple maintenance

Replacing carbon brushes and greasing the gears once a year is all you need for maintenance. EDU1FR control units for FAB and RAF screwdrivers feature a maintenance-free, state-of-the-art electronics and no wearing components. This design results in very low current to the driver's start switch and clutch switch to extend their life indefinitely.

Safe, clean and low noise

All FAB and RAF models come standard with ESD-safe housings against electrostatic discharge. Their electric motor makes them not only energy efficient but also free of pollutants and contributes to a quieter environment (noise within 55 dB(A)). Ergonomic grip, lightweight and compact design for maximum operator comfort.


Basic and advanced functionalities

FAB and RAF work in combination with EDU1FR series controllers, acting as an AC to DC transformer and torque controller with adjustable slow start and speed. More features available when used in combination with EDU2AE/FR controller or EDU1FR/SG with ACE screw counter (see chart on next page).


Available Housings



INLINE – Inline versions available in lever start or push-to-start.
Bit Drive: 1/4" hex quick change chuck



PISTOL GRIP – Trigger start, pistol grip available with top connector (PP/FR/U) or bottom connector (PP/FR).
Bit Drive: 1/4" hex quick change chuck



ANGLE HEAD OPTION – 90° angle heads can be easily attached to inline models. Angle attachments are the ideal solution to operate where space is limited. See page 46.





Inline FAB Screwdrivers

| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Weight kg | Start Option |
|-----------|------------|------------|-------------|---------------|-----------|---------------|
| 110003/FR | FAB03SS/FR | 0.05 - 0.3 | 450 - 650 | 237 x 33 | 0.50 | Lever Start |
| 110010/FR | FAB10RE/FR | 0.05 - 0.8 | 600 - 1000 | 237 x 33 | 0.50 | Lever Start |
| 110012/FR | FAB12RE/FR | 0.2 - 1.2 | 600 - 1000 | 237 x 33 | 0.50 | Lever Start |
| 112012/FR | FAB12PS/FR | 0.2 - 1.2 | 600 - 1000 | 249 x 33 | 0.50 | Push-to-start |
| 110618/FR | FAB18RE/FR | 0.3 - 1.8 | 450 - 650 | 237 x 33 | 0.50 | Lever Start |
| 112618/FR | FAB18PS/FR | 0.3 - 1.8 | 450 - 650 | 249 x 33 | 0.50 | Push-to-start |

Inline RAF Screwdrivers

| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Weight kg | Start Option |
|-----------|------------|-----------|-------------|---------------|-----------|---------------|
| 120032/FR | RAF32NS/FR | 0.7 - 3.2 | 600 - 1000 | 259 x 40 | 0.65 | Lever Start |
| 122032/FR | RAF32PS/FR | 0.7 - 3.2 | 600 - 1000 | 269 x 40 | 0.65 | Push-to-start |
| 120638/FR | RAF38NS/FR | 0.9 - 3.8 | 450 - 650 | 259 x 40 | 0.65 | Lever Start |
| 122638/FR | RAF38PS/FR | 0.9 - 3.8 | 450 - 650 | 269 x 40 | 0.65 | Push-to-start |
| 120650/FR | RAF50NS/FR | 0.9 - 5 | 400 - 700 | 259 x 40 | 0.65 | Lever Start |
| 122650/FR | RAF50PS/FR | 0.9 - 4.5 | 400 - 700 | 269 x 40 | 0.65 | Push-to-start |

Pistol grip FAB Screwdrivers

| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Weight kg | Connector Option |
|-------------|--------------|-----------|-------------|----------------|-----------|------------------|
| 110013/FR | FAB12PP/FR | 0.2 - 1.2 | 600 - 1000 | 220 x 159 x 44 | 0.55 | Bottom connector |
| 110013/FR/U | FAB12PP/FR/U | 0.2 - 1.2 | 600 - 1000 | 220 x 163 x 44 | 0.55 | Top connector |
| 110619/FR | FAB18PP/FR | 0.3 - 1.8 | 450 - 650 | 220 x 159 x 44 | 0.55 | Bottom connector |
| 110619/FR/U | FAB18PP/FR/U | 0.3 - 1.8 | 450 - 650 | 220 x 163 x 44 | 0.55 | Top connector |


Pistol grip RAF Screwdrivers

| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Weight kg | Connector Option |
|-------------|--------------|-----------|-------------|----------------|-----------|------------------|
| 120033/FR | RAF32PP/FR | 0.7 - 3.2 | 600 - 1000 | 220 x 159 x 44 | 0.65 | Bottom connector |
| 120033/FR/U | RAF32PP/FR/U | 0.7 - 3.2 | 600 - 1000 | 220 x 163 x 44 | 0.65 | Top connector |
| 120639/FR | RAF38PP/FR | 0.9 - 3.8 | 450 - 650 | 220 x 159 x 44 | 0.65 | Bottom connector |
| 120639/FR/U | RAF38PP/FR/U | 0.9 - 3.8 | 450 - 650 | 220 x 163 x 44 | 0.65 | Top connector |
| 120651/FR | RAF50PP/FR | 0.9 - 5 | 400 - 700 | 220 x 159 x 44 | 0.70 | Bottom connector |
| 120651/FR/U | RAF50PP/FR/U | 0.9 - 5 | 400 - 700 | 220 x 163 x 44 | 0.70 | Top connector |

Control units for FAB & RAF Screwdrivers

| Code | Model | Adjustable Speed | Ramp Option | I/O Signals | Serial Print | Screw Count | Run Time | Weight kg | Dimensions mm |
|--------------|-----------|------------------|-------------|-------------|--------------|-------------|----------|-----------|-----------------|
| 010010/FR | EDU1FR | • | • | - | - | - | - | 0.60 | 138 x 118 x 67 |
| 010010/FR/SG | EDU1FR/SG | • | • | • | with ACE | with ACE | - | 0.60 | 138 x 118 x 67 |
| 032000/FR | EDU2AE/FR | • | • | • | • | • | • | 2.40 | 195 x 170 x 110 |

IMPORTANT: Continuous use over 80% of torque range is not recommended.

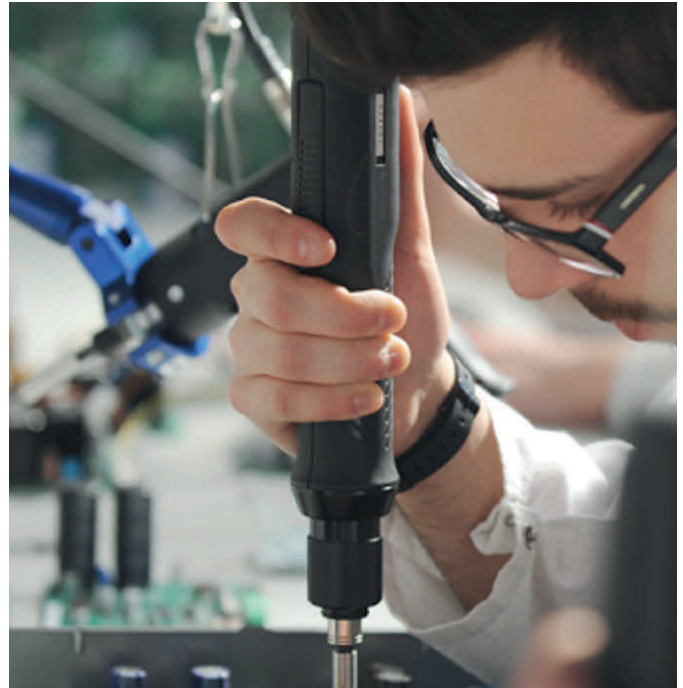

KBL Brushless Screwdrivers | Torque range 0.04 – 4 Nm

The perfect solution for clean room applications. KBL screwdrivers feature state-of-the-art brushless motors and clutch torque control.

Simple set up

KBL tools are very easy to install and operate. The torque is set externally: you'll only have to manually adjust the front clutch according to the required torque setting.

Each screwdriver works in combination with a control unit. Its electronic control circuit cuts the power supply to the screwdriver motor in response to the clutch action, as soon as the pre-set torque has been reached.

Maintenance-free

No wearing components and no brush replacement – KBL Screwdrivers combine Swiss brushless motors with magnetic clutch switches for a real maintenance-free solution. The absence of maintenance operations guarantees high productive continuity.

EDU1BL control units for KBL screwdrivers feature state-of-the-art electronics working at only 30 VDC. This design results in very low current to the driver's start and clutch switches to extend their life even further.

For a cleaner environment

No brushes means zero emissions of carbon dust or other pollutants into the working environment, which makes KBL screwdrivers perfect for clean-room applications.

Safe and ergonomic

KBL hand-held screwdrivers are available in inline and pistol type and they all come standard with ESD-safe housing. Small and lightweight for utmost operator comfort and with advanced ergonomic design, they ensure very low noise level, minimum vibrations and maximum safety.

Improve your productivity by cutting investments

It is possible to use two screwdrivers with just one control unit by connecting a double output device called DOCK 02 (for KBL FR) or DOCK 02/S (for KBL FR/S).

The two screwdrivers can be used at the same time for maximum productivity. 230V only.

Available Housings



INLINE – Inline versions available in lever start with signals (KBL FR/S) or without (KBL FR). Also available with autoreverse feature (KBL FR/AR), best used with RIV HD riveting heads. Bit Drive: 1/4" hex quick change chuck



PISTOL GRIP – Trigger start, pistol grip available with signals (KBL P/S) or without (KBL P/FR). Bit Drive: 1/4" hex quick change chuck



ANGLE HEAD OPTION – 90° angle heads can be easily attached to inline models. Angle attachments are the ideal solution to operate where space is limited.



ESD-safe housing



Inline KBL Screwdrivers

| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Weight kg | Control unit |
|--------------------------------|-----------|------------|-------------|---------------|-----------|--------------|
| Standard models | | | | | | |
| 190004 | KBL04FR | 0.04 - 0.4 | 650 - 1000 | 255 x 37 | 0.50 | EDU1BL |
| 190015 | KBL15FR | 0.4 - 1.5 | 650 - 1000 | 255 x 37 | 0.50 | EDU1BL |
| 190030 | KBL30FR | 0.7 - 3 | 650 - 1000 | 268 x 43 | 0.65 | EDU1BL |
| 190040 | KBL40FR | 0.9 - 4 | 450 - 750 | 268 x 43 | 0.65 | EDU1BL |
| Models with I/O signals | | | | | | |
| 190004/S | KBL04FR/S | 0.04 - 0.4 | 650 - 1000 | 255 x 37 | 0.50 | EDU1BL/SG |
| 190015/S | KBL15FR/S | 0.4 - 1.5 | 650 - 1000 | 255 x 37 | 0.50 | EDU1BL/SG |
| 190030/S | KBL30FR/S | 0.7 - 3 | 650 - 1000 | 268 x 43 | 0.65 | EDU1BL/SG |
| 190040/S | KBL40FR/S | 0.9 - 4 | 450 - 750 | 268 x 43 | 0.65 | EDU1BL/SG |

Inline KBL Screwdrivers are also available in KBL FR/AR, with autoreverse feature.

Pistol grip KBL Screwdrivers

| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Weight kg | Control unit |
|--------------------------------|-----------|------------|-------------|----------------|-----------|--------------|
| Standard models | | | | | | |
| 190005 | KBL04P/FR | 0.04 - 0.4 | 650 - 1000 | 154 x 210 x 45 | 0.50 | EDU1BL |
| 190016 | KBL15P/FR | 0.4 - 1.5 | 650 - 1000 | 154 x 210 x 45 | 0.50 | EDU1BL |
| 190031 | KBL30P/FR | 0.7 - 3 | 650 - 1000 | 154 x 217 x 45 | 0.65 | EDU1BL |
| 190041 | KBL40P/FR | 0.9 - 4 | 450 - 750 | 154 x 217 x 45 | 0.65 | EDU1BL |
| Models with I/O signals | | | | | | |
| 190005/S | KBL04P/S | 0.04 - 0.4 | 650 - 1000 | 154 x 210 x 45 | 0.50 | EDU1BL/SG |
| 190016/S | KBL15P/S | 0.4 - 1.5 | 650 - 1000 | 154 x 210 x 45 | 0.50 | EDU1BL/SG |
| 190031/S | KBL30P/S | 0.7 - 3 | 650 - 1000 | 154 x 217 x 45 | 0.65 | EDU1BL/SG |
| 190041/S | KBL40P/S | 0.9 - 4 | 450 - 750 | 154 x 217 x 45 | 0.65 | EDU1BL/SG |

Angle head KBL Screwdrivers

| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Weight kg | Control unit |
|----------|-------------|------------|-------------|---------------|-----------|--------------|
| 190004/A | KBL04FR/ANG | 0.04 - 0.4 | 650 - 1000 | 316 x 37 | 0.60 | EDU1BL |
| 190015/A | KBL15FR/ANG | 0.4 - 1.5 | 650 - 1000 | 316 x 37 | 0.60 | EDU1BL |
| 190030/A | KBL30FR/ANG | 0.7 - 3 | 650 - 1000 | 330 x 43 | 0.75 | EDU1BL |
| 190040/A | KBL40FR/ANG | 0.9 - 4 | 450 - 750 | 330 x 43 | 0.75 | EDU1BL |

Control units for KBL Screwdrivers

| Code | Model | Settable Speed | Ramp Option | I/O Signals | Serial Print | Screw Count | Min-Max Run Time | Weight kg | Dimensions mm |
|-----------|-----------|----------------|-------------|-------------|--------------|-------------|------------------|-----------|----------------|
| 003000 | EDU1BL | • | - | - | - | - | - | 0.60 | 138 x 118 x 67 |
| 003000/SG | EDU1BL/SG | • | • | • | with ACE | with ACE | with ACE | 0.60 | 138 x 118 x 67 |

IMPORTANT: Continuous use over 80% of torque range is not recommended.



KBL Screwdrivers for Automation | Torque range 0.04 – 4 Nm

KBL CA Screwdrivers combine state-of-the-art brushless motors with an aluminium housing for quick and easy installation on robots and automatic machines.

Designed for automation

KBL CA tools are supplied in an aluminium body for a quick and easy integration with automatic machines and screw feeding systems. KBL tools in CA/FN version are equipped with a flange mount and reciprocating spindle for high-intensity applications.

Easy to install and operate

Each KBL CA screwdriver works in combination with an EDU1BL/SG control unit. Its electronic control circuit cuts the power supply to the screwdriver motor in response to the clutch action, as soon as the pre-set torque has been reached.

KBL's torque clutch only needs to be set once and guarantees accurate repeatability on any kind of joint.

Industry 4.0 with KBL

Transitioning to Industry 4.0 is easy with KBL CA screwdrivers. They can be easily connected to robots or automatic machines through their EDU 1BL/SG controller's proper connectors to manage input/output signals such as start, stop, error and more.

No maintenance required

Automation requires tools capable of keeping high quality standards, even on heavy-duty applications. KBL Screwdrivers combine Swiss brushless motors with magnetic clutch switches for a real maintenance-free solution. The absence of maintenance operations guarantees high productive continuity.

For clean-room environments

KBL screwdrivers are perfect for automated applications requiring clean-room standards. No brushes means zero emissions of carbon dust or other pollutants into the working environment, which guarantees high-quality assembly on any joint.

Available Housings



ALUMINIUM BODY (KBL CA) – Specifically designed for automation. Easy to install on any machine or robot.



ALUMINIUM BODY WITH FLANGE MOUNT (KBL CA/FN) – Ideal for automated high volume/high duty applications. Flange and telescopic spindle available together or separately.



Robotic application
SCAN TO WATCH



ESD-safe housing



Aluminium housing KBL Screwdrivers

| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Weight kg | Bit Drive |
|-----------|------------|------------|-------------|---------------|-----------|-----------|
| 190004/CA | KBL04FR/CA | 0.04 - 0.4 | 650 - 1000 | 257 x 40 | 0.60 | Hex 1/4" |
| 190015/CA | KBL15FR/CA | 0.4 - 1.5 | 650 - 1000 | 257 x 40 | 0.60 | Hex 1/4" |
| 190030/CA | KBL30FR/CA | 0.7 - 3 | 650 - 1000 | 264 x 40 | 0.75 | Hex 1/4" |
| 190040/CA | KBL40FR/CA | 0.9 - 4 | 450 - 750 | 264 x 40 | 0.75 | Hex 1/4" |

Aluminium housing KBL Screwdrivers with flange mount

| Code | Model | Torque Nm | RPM min-max | Dimensions mm | Weight kg | Bit Drive |
|--------------|---------------|------------|-------------|---------------|-----------|-----------|
| 190004/CA/FN | KBL04FR/CA/FN | 0.04 - 0.4 | 650 - 1000 | 330 x 40 | 0.65 | Hex 1/4" |
| 190015/CA/FN | KBL15FR/CA/FN | 0.4 - 1.5 | 650 - 1000 | 330 x 40 | 0.65 | Hex 1/4" |
| 190030/CA/FN | KBL30FR/CA/FN | 0.7 - 3 | 650 - 1000 | 338 x 40 | 0.80 | Hex 1/4" |
| 190040/CA/FN | KBL40FR/CA/FN | 0.9 - 4 | 450 - 750 | 338 x 40 | 0.80 | Hex 1/4" |

Control unit for KBL CA Screwdrivers

| Code | Model | Settable Speed | Ramp Option | I/O Signals | Serial Print | Screw Count | Min-Max Run Time | Weight kg | Dimensions mm |
|-----------|-----------|----------------|-------------|-------------|--------------|-------------|------------------|-----------|----------------|
| 003000/SG | EDU1BL/SG | • | • | • | with ACE | with ACE | with ACE | 0.60 | 138 x 118 x 67 |

IMPORTANT: Continuous use over 80% of torque range is not recommended.



ACC Screwdrivers | Torque range 0.2 – 4.5 Nm

ACC screwdrivers are direct plug-in tools with built-in PCB for automatic cut off and AC to DC rectifier. They are ideal for applications where portability is needed to minimize costly set-up time. ACC models have the unique feature of selectable push to start or push and lever start: to select the working mode just slide the switch located by the start lever.

All ACC models feature shut off torque control through mechanical clutch. It is possible to lock their mechanical clutch and avoid any accidental torque change by adding an optional Lock-out Cover, available for all ACC models (code 219011).



Reverse Switch




Torque Adjusting Nut Cover

Inline ACC Screwdrivers with Built-in Controller

| Code | Model | Torque Nm | RPM max | Dimensions mm | Weight kg | Bit Drive |
|--------|---------|-----------|---------|---------------|-----------|-----------|
| 141910 | ACC2210 | 0.2 - 1 | 950 | 255 x 35 | 0.75 | Hex 1/4" |
| 141920 | ACC2220 | 0.7 - 2 | 950 | 255 x 35 | 0.80 | Hex 1/4" |
| 151222 | ACC2222 | 0.9 - 2 | 2400 | 265 x 38 | 0.85 | Hex 1/4" |
| 151930 | ACC2230 | 1.0 - 3 | 950 | 265 x 38 | 0.85 | Hex 1/4" |
| 151945 | ACC2245 | 1.0 - 4.5 | 450 | 265 x 38 | 0.85 | Hex 1/4" |

IMPORTANT: Continuous use over 80% of torque range is not recommended.

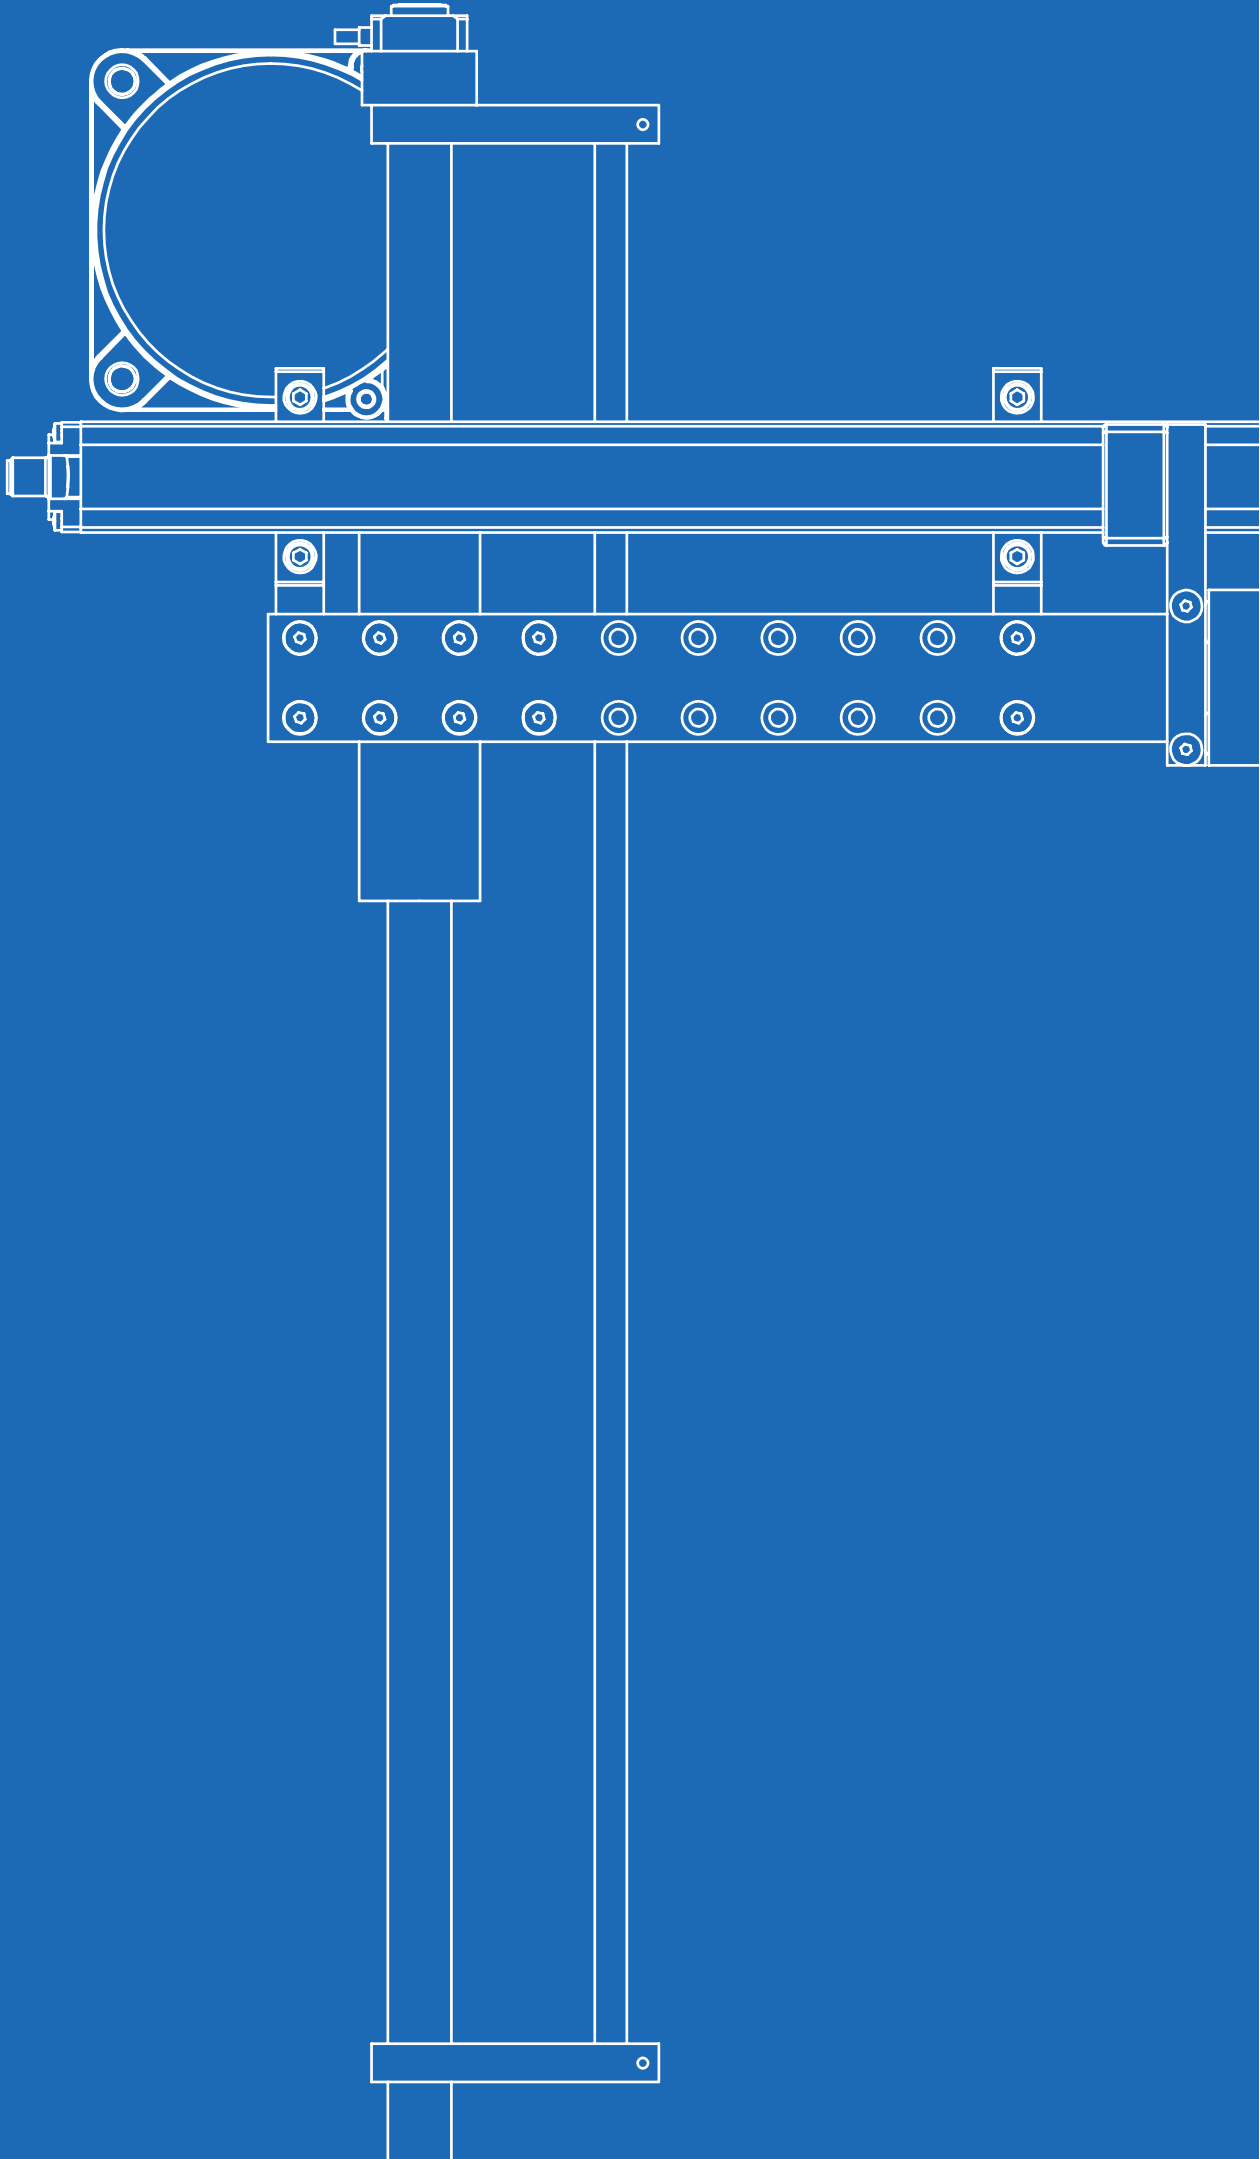

**TORQUE TESTERS / SCREW FEEDERS
REACTION ARMS / POSITIONING SYSTEMS**



K and Mini K/S Series Torque Testers | Torque range 0.05 – 50 Nm

Controlling torque is vital for companies to ensure their product's quality. Fasteners that are insufficiently torqued can vibrate loose and excessive torque can strip threaded fasteners. Using a quality torque tester has become increasingly important for most companies to ensure that proper torque is being applied.

Mini Ke/S Series with External Transducer

The Mini Ke/S system consists of a torque readout and an external rotary transducer. By connecting a rotary torque transducer between an electric or pneumatic tool and an assembly application, you can monitor the real torque being applied from the tool to fastener or bolt.

It is possible to connect different transducers to the same torque reader by setting the proper Correction Factor (FATC). A Mini Ke/S is the ideal torque-auditing tool for testing the actual torque being applied on the assembly application.

Mini K/S Series – Portable Torque Testers

MINI K/S Torque Testers feature a built-in transducer. These easy-to-use torque testers are ideal for checking all power tools up to 20 Nm. The small size and portability of MINI K/S make them ideal for checking torque tools on the production floor regularly to ensure the tools are always calibrated.

- Three units of torque measurement available; Nm, Kg.cm, in/lbs.
- Manual and auto reset functions to clear displayed values.
- Battery powered (9V) and AC adapter. 9V battery provides 30 hours of continuous operation.
- Automatic shut down to extend battery life.
- mini USB port for printing torque values, date and hour
- Torque Tester includes a washer-based joint simulator (miniK5/S and miniK20/S) or built in joint simulator (miniK1/S), instructions manual, certificate of calibration and a case.

K Series – Advanced Torque Testers

The K Series Torque Testers feature a built-in transducer and can also be connected to an external transducer. They collect, store and eventually download torque measures for a complete analysis of the tool and/or the joint.

Main features include:

- 500 readings memory.
 - Selection among Nm, Ncm, Kg.cm, in/lbs.
 - RS232C output (cable not included).
 - Indication < = > of the preset values
 - Output signal at preset reached value.
 - Clockwise and counter-clockwise measurements.
 - 3 models of operation: Peak +, Peak -, Track.
 - Manual or automatic reset.
 - 9 V rechargeable battery provides 4 hours of continuous operation.
- Automatic switch off to reduce battery consumption.

Supplied in a plastic carrying case, with one rechargeable battery, 1 joint simulator (semielastic), instructions manual and certificate of calibration.



Model K Torque Testers

| Code | Model | Torque range Nm | Dimensions mm | Weight kg | Joint Simulator | External Transducer | Connecting Port |
|--------------------------------------|-------|-----------------|----------------|-----------|-----------------|-----------------------------|-----------------|
| 020402 | K1 | 0.05 - 1 | 172 x 142 x 41 | 1.0 | Semi-Elastic M6 | - | RS232C |
| 020403 | K5 | 0.3 - 5 | 172 x 142 x 41 | 1.0 | Semi-Elastic M6 | KTE5 (optional) | RS232C |
| 020404 | K20 | 0.5 - 20 | 172 x 142 x 41 | 1.0 | Semi-Elastic M8 | KTE25 (optional) | RS232C |
| Optional External Transducers | | | | | | | |
| 022405 | KTE5 | 0.5 - 5 | 25 x 92 | 0.3 | | External Transducer for K5 | |
| 022425 | KTE25 | 2 - 25 | 25 x 92 | 0.3 | | External Transducer for K20 | |

Model Mini K/S Torque Testers

| Code | Model | Torque range Nm | Dimensions mm | Weight kg | Joint Simulator | External Transducer | Connecting Port |
|-------------|-------------|-----------------|---------------|-----------|--------------------|---------------------|-----------------|
| 021402/S | Mini K1/S | 0.05 - 1 | 150 x 70 x 45 | 0.80 | Internal Simulator | - | mini USB |
| 021403/S | Mini K5/S | 0.3 - 5 | 150 x 70 x 45 | 0.80 | Semi-Elastic M6 | - | mini USB |
| 021404/S | Mini K20/S | 0.5 - 20 | 150 x 70 x 45 | 0.80 | Semi-Elastic M8 | - | mini USB |
| 021405/5/S | Mini Ke5/S | 0.5 - 5 | 150 x 70 x 45 | 0.50 | - | KTE5 (included) | mini USB |
| 021405/25/S | Mini Ke25/S | 2 - 25 | 150 x 70 x 45 | 0.50 | - | KTE25 (included) | mini USB |
| 021405/50/S | Mini Ke50/S | 5 - 50 | 150 x 70 x 45 | 0.50 | - | KTE50 (included) | mini USB |

Torque Analyser Software

The new Kolver Torque Analyser software for Mini K/S and Mini Ke/S Torque Testers features real-time tracking of each measurement and calculation of CM and CMK.

A Real-time chart for each torque measurement is displayed on your PC screen (when "track mode" on the tester is enabled). The chart will show the trend of the single screwing operation or, in case of multiple screwing operations it will show the results according to the settings on the torque tester and software (for example if you're keeping track of multiple operations at max torque, the chart will show the trend of these max torques). You can also export an Excel file (max 30 measurements) with corresponding CM-CMK values: this is useful for testing the torque accuracy of the screwdriver.

