

SPIRAL WRAP - WS®

DESCRIPTION :

Spiral wrap WS® is available in the diameter range from 3mm to 20mm. It may be used to wrap bundles from 3mm to 60mm in combined outside diameter. Spiral wrap WS® is resistant to common solvents, lubricants and greases. It is also seawater and mould resistant. Due to its rigidity and shape Spiral wrap WS® is well suited to gather, bundle and wrap not only wires, cables and conductors of all types but also hydraulic and pneumatic lines, tubing and piping. Ideal in creating wire harnesses. Often used as colour coding and identification media.

MATERIAL :

LDPE (low density polyethylene)

COLOUR :

Black. Custom colours available with minimum order requirement of 20 kg

APPLICATIONS :

Gathering, bundling and wrapping of variety of wires and cables, conductors, hydraulic and pneumatic lines, tubing and piping. Ideal in creating wire harnesses and as colour coding and identification media.

THERMAL PROPERTIES :

Temperature range: continuous -30°C up to +70°C

FLAMMABILITY :

Fire Hazard Class III



TESTS AND CERTIFICATION :

Meets the requirements of the European Directive 2002/95/EC (RoHS) dated January 27, 2003 restricting the use of some substances within electrical and electronic equipment.

PACKAGING :

Coils 50 m, 100 m in length.

Custom packaging available upon request.

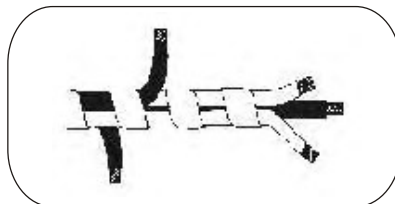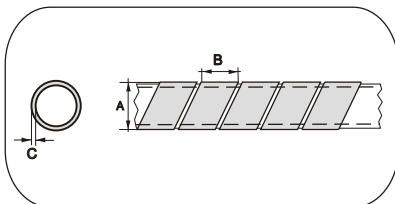

type	colour and material	dimensions (mm)			bundle outside diameter (mm)
		A	B	C	
WS 3	PE black	3	4	0,5	3 - 10
WS 5		5	6	0,6	5 - 20
WS 10		10	11	0,9	10 - 30
WS 15		15	15	1,0	15 - 40
WS 20		20	19	1,3	20 - 60

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Non-Heat Shrink Tubing and Sleeves](#) category:

Click to view products by [KURANT](#) manufacturer:

Other Similar products are found below :

[601203-000](#) [CTA-0053](#) [8429-9](#) [8445-7.5](#) [8450](#) [120-116-1-1-09BE](#) [120-116-1-1-09BF](#) [120-116-1-1-09BP](#) [120-116-1-1-12BE](#) [120-116-1-1-12BP](#) [120-123-06](#) [120-123-10](#) [120-125-12BL](#) [120-125-12R](#) [120-125-20R](#) [120-126-09](#) [120-126-09BL](#) [120-126-12](#) [120-126-12BL](#) [120-126-52](#) [120-126-52BL](#) [120-104-12](#) [120-105-1-1-06BE](#) [120-105-1-1-06CE](#) [120-108-10B](#) [120-116-1-1-06BP](#) [120-116-1-1-10BP](#) [120-116-1-1-12BF](#) [120-123-12](#) [120-125-09](#) [120-125-12](#) [120-125-12Y](#) [120-125-52BL](#) [120-S002-12](#) [HC1B-7008-0375-0](#) [120-S001-09](#) [120-S002-09](#) [121-101-1-1-56BFC](#) [121-101-1-1-64BFC](#) [121-103-1-1-12BFTTH](#) [RAY-90-3.0\(100\)](#) [20675-2](#) [8S42-100FR-CS8184](#) [SAS-115-1-1048-1X](#) [SAS-160-1-1048-1X](#) [RAY-103-10.0\(100\)](#) [RAY-103-4.0\(100\)](#) [4627-S](#) [3-1991136-0](#) [561-SL1000PP](#)