


Insertion Loss (dB Max)		Return Loss (dB Min)		Cross Talk (dB Min)		CMR (dB Min)			OCL (uH Min)
100 MHz	1~400 MHz	1~100 MHz	100~500 MHz	1~100 MHz	100~500 MHz	1~40 MHz	40~100 MHz	100~500 MHz	@100 KHz, 0.1 V 15mA DC Bias
-3.0	-2.0(-1.4 Typ)	-22	-22+20.75Log(f/100)	-28	-19	-30	-28	-26	160

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	568nm	20mA	1.85-2.45V
Yellow	585nm	20mA	1.7-2.2V

Durability Rating:
750 Mating Cycles Min.
Mating Force: 23N Max.
Operating Temperature:
-40°C to +85°C

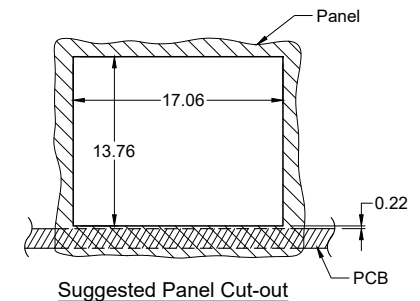

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A0	07/10/24	New Drawing	C. Kelleher	C. Kelleher	C. Kelleher	07/08/24
						UNITS
						mm

X.X $\pm$ 0.30
X.XX $\pm$ 0.25
Unless Stated
Otherwise



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Modular Connectors / Ethernet Connectors](#) ***category:***

Click to view products by [Kycon](#) ***manufacturer:***

Other Similar products are found below :

[04.070.0480](#) [04.090.0880](#) [0424104168](#) [0424108362](#) [0432236028](#) [0432238022](#) [0441700003](#) [075-8516-000](#) [075-8517-000](#) [0811-2X4R-28-F](#)
[0813-1X1T-23-F](#) [0813-1X1T-57-F](#) [0816-1X1T-23-F](#) [0820-1X1T-00-F](#) [0821-1X1T-32-F](#) [0821-1X1T-36-F](#) [0821-1X1T-43-F](#) [0826-1A1T-23-F](#)
[0826-1C1T-23-F](#) [0826-1C1T-43-F](#) [0826-1D1T-23-F](#) [0826-1G1T-23-F](#) [0826-1G1T-43-F](#) [0826-1K1T-23-F](#) [0826-1K1T-43-F](#) [0826-1L1T-23-F](#)
[0826-1L1T-57-F](#) [0826-1L4T-23-F](#) [0826-1X1T-23-F](#) [0826-1X1T-32-F](#) [0826-1X1T-43-F](#) [0826-1X1T-57-F](#) [0826-1X1T-80-F](#) [0826-1X1T-GH-F](#)
[0826-1X1T-GJ-F](#) [0826-1X1T-HS-F](#) [0826-1X1T-HT-F](#) [0826-1X1T-JKB-F](#) [0826-1X1T-JK-F](#) [0826-1X1T-KH-F](#) [0826-1X1T-KL-F](#)
[0826-1X1T-M1-F](#) [0826-1X2T-23-F](#) [0826-1X2T-43-F](#) [0826-1X4T-23-F](#) [0826-1X4T-43-F](#) [0826-1X4T-GH-F](#) [0826-1X4T-HS-F](#) [0833-2X4R-54-F](#)
[0833-2X6R-54-F](#)