08/06/18


A4

Address Update

G. Serrato

D. Shehan

 \oplus

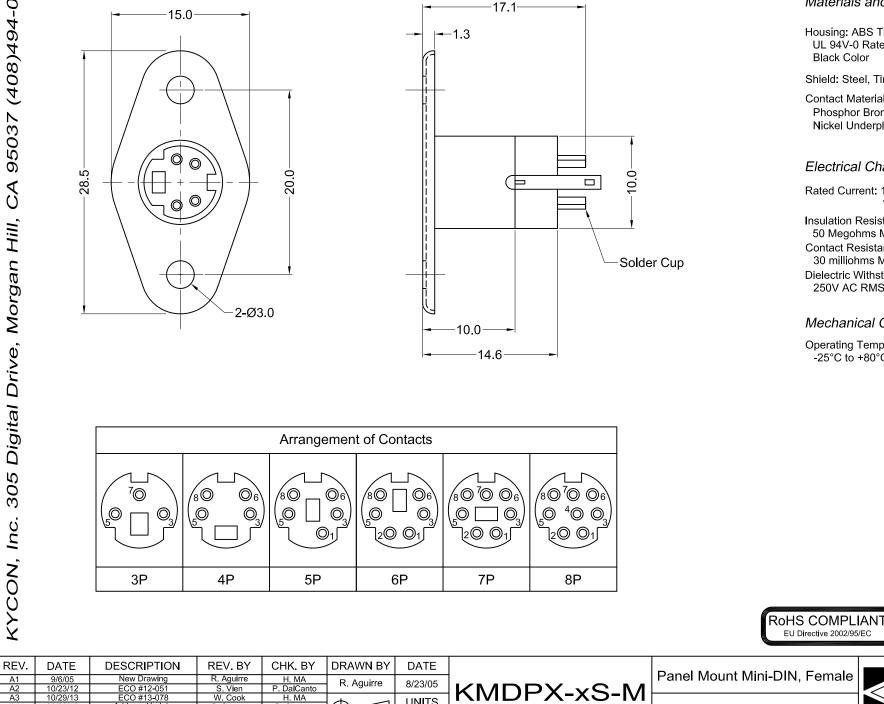

UNITS

mm

Materials and Finish

Housing: ABS Thermoplastic UL 94V-0 Rated, Black Color

Shield: Steel, Tin Plated

Contact Material: Phosphor Bronze, Silver Plated over Nickel Underplate

Electrical Characteristics

Rated Current: 100V AC 1AMP Max. 12V DC 2AMP Max.

Insulation Resistance: 50 Megohms Min. at 250V DC Contact Resistance: 30 milliohms Max. Dielectric Withstanding Voltage: 250V AC RMS for 1 Minute

Mechanical Characteristics

Operating Temperature: -25°C to +80°C

EU Directive 2002/95/EC

Metal Shell, RoHS Compliant

Tolerances X.X ± 0.35

X.XX ± 0.25 Unless Stated US Otherwise LR78160

SP•

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Circular DIN Connectors category:

Click to view products by Kycon manufacturer:

Other Similar products are found below :

60KD4M M83723/76W22326 M83723/78R22327 D38999/26FE99SN L/C 75-069228-21J 75-474014-07L 88-559975-75P 8R3006A18M0033 PT02E1283P GTC00G-24-7S PT05A-14-5SX PT05A1832SW PT05E2255PW PT05SE1832SWLC PT05SE1832SYLC GTC030-20-27PW-LC GTC030A-20-33S PT06SE1811SXLC 1211290078 1211810025 1210120122 ACC06AF-20-23P(003) 1210503216 1211290084 1211500027 ACS06AF-16-10P(003) D38999/40FB35AN D38999/40FB35BB D38999/40WB35BN D38999/40WD35PN D38999/40WJ29SN-L/C D38999/40WJ4BN D38999/42FB35BN D38999/42WB35AB D38999/40WB35BN D38999/40WD35PN D38999/42WJ24PN-L/C D38999/40WJ4BN D38999/44WH21AN D38999/44WH35AN D38999/44WJ29BA D38999/44WJ35PN D38999/44WJ61BA D38999/46FB35AC D38999/46FB35BN D38999/46FB35SA-L/C D38999/46FB99BA D38999/46FB99BN D38999/46FJ19SA-L/C D38999/46FJ29AA