

Materials and Finish

Housing:
Thermoplastic, black color
UL94V-2 rated

Contacts:
Brass

Contact Plating:
Tin Plated

Electrical Characteristics

Dielectric Strength:
800 V AC for 1 minute

Insulation Resistance:
1000 Megohm min. at 500V DC


Contact Resistance:
20 milliohm max.

Mechanical Characteristics

Insertion Force:
11 kg max.

Withdrawal Force:
1.1 - 7 kg

Operating Temperature
-40°C to +85°C

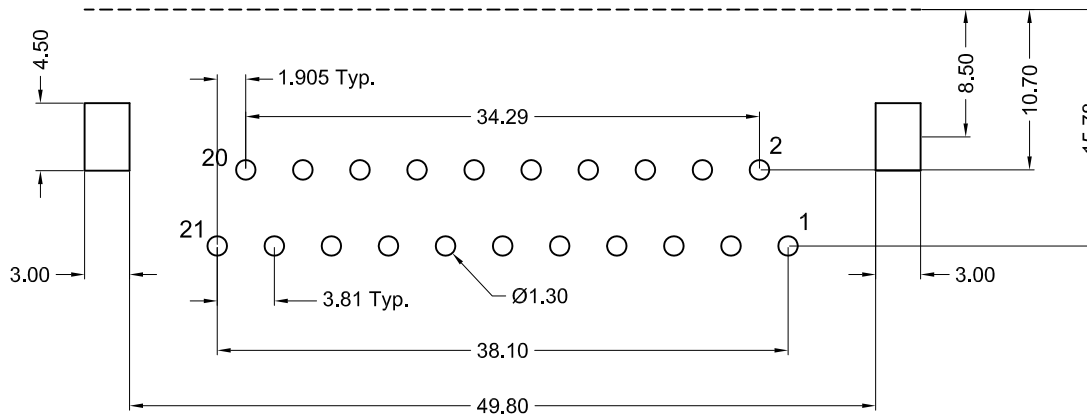

Recommended PCB Layout
(Bottom View)


RoHS COMPLIANT
EU Directive 2002/95/EC



Tolerances	
X.X ± 0.25	
X.XX ± 0.15	
Unless Stated	Otherwise

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A1	07/01/05	New Drawing	H. MA	C. Furumasu	H. MA	7/1/05
A2	03/29/10	Add Operating Temp.	S. Vien	H. MA		
A3	04/08/15	ECO #15-024	W. Cook	N/A		

K-SCARTX-022



SCART Socket, 21 Positions, Right Angle

W/O Mounting Hole, RoHS Compliant



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [D-Sub Standard Connectors](#) category:

Click to view products by [Kycon](#) manufacturer:

Other Similar products are found below :

[56F706-005-LI](#) [56F711-015](#) [012-9507-004](#) [LV242999-142T12](#) [015-0341-000](#) [015-0372-005](#) [015-0372-008](#) [015-8755-001](#) [020419-0104](#)
[012-0467-000](#) [012-9507-034](#) [012-9507-114](#) [020745-0008](#) [609-25P](#) [CT2-14S-2PCA34](#) [CT2-18-11PCAU](#) [CT6-10SL-3SC](#) [CT6-10SL-4SC](#)
[CT6-14S-2SC](#) [CT6E14SA7SC](#) [CT6N10SL-4SSA34](#) [M83513/01-FC](#) [M83723/76W24619 L/C](#) [M85049/48-3-2F](#) [6STD09PCM99B70X](#)
[6STD09SCM99B30X](#) [6STD09SCT99S40X](#) [6STD15PCT99S40X](#) [6STD15SCT99S40X](#) [6STF09PCM05B70X](#) [7-135760-9](#) [MC11E-10-6SN](#)
[747552-3](#) [MD1-21PS](#) [MDM-15SCBRM7-F222](#) [MDM96517-699](#) [MDM96521-744](#) [MDVB1-21SL1](#) [MIK0-1-7SH003](#) [MIKQ6-7SH076](#)
[MIKQ7-7PH077](#) [MIKQ7-7PH11](#) [MIKQ7-7PH32](#) [MJSV-28SL61](#) [MKJ4A1F14-55S](#) [8-135760-3](#) [8STD09PCM99B30X](#) [PG-KV/PV-16-](#)
[GROM-SEALING](#) [GDA15P](#) [GDAY15PB](#)