

Materials and Finish

Housing:
 Thermoplastic, black color
 UL94V-2 rated

Contacts:
 Brass

Contact Plating:
 Tin Plated

Electrical Characteristics

Dielectric Strength:
 800 V AC for 1 minute

Insulation Resistance:
 1000 Megohm min. at 500V DC


Contact Resistance:
 20 milliohm max.

Mechanical Characteristics

Insertion Force:
 11 kg max.

Withdrawal Force:
 1.1 - 7 kg

Recommended PCB Layout

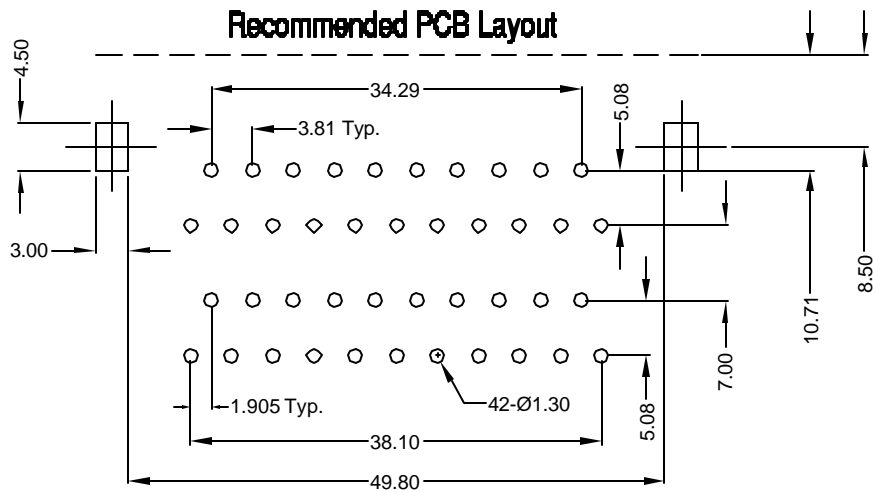

RoHS COMPLIANT
 EU Directive 2002/95/EC



Tolerances
X.X ± 0.25
X.XX ± 0.15
Unless Stated Otherwise

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A1	7/6/05	New Drawing	H. MA	C. Furumasu	H. MA	7/6/05

K-SCARTX-028A

SCART Socket, Dual Port,
21 Positions, RoHS Compliant



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [D-Sub Dualport Connectors](#) category:

Click to view products by [Kycon](#) manufacturer:

Other Similar products are found below :

[787672-3](#) [164A15909X](#) [K42X-E15S/S-A4NJ](#) [K42X-E9SS-A4NJ](#) [242A14060X](#) [164A15819X](#) [DLS2SS5AN21X](#) [241A22450X](#) [242A14180X](#)
[241A14190X](#) [DLS4SS5AN21X](#) [178-037-513R491](#) [178-037-613R491](#) [178-009-413R571](#) [178-009-513R571](#) [178-009-613R491](#) [178-009-613R691](#) [178-015-513R571](#) [178-015-613R571](#) [178-025-413R571](#) [178-025-513R571](#) [179-009-613R571](#) [179-025-513R571](#) [K42X-E15S/S-A4N](#) [L17H2220131](#) [178-009-613R571](#) [178-015-513R491](#) [178-025-613R481](#) [178-025-613R571](#) [178-037-513R571](#) [178-037-513R671](#)
[L17H2ED0130](#) [L17H1440130](#) [L17H1770231](#) [L17H2440120TM](#) [L17H1431134](#) [L17H1212130](#) [L17H2212120](#) [L17H1222134](#)
[L17H2662120TM](#) [L17H2550120](#) [L17H2440120](#) [L17H2440121](#) [L17H1120134](#) [L17H2120120](#) [L17H2120230](#) [L17H1440134](#) [L17H2990130](#)
[K42X-B25S/S-A4N](#) [K42X-E9P/E15S-A4NJ](#)