



## Universal Serial Bus: KUSB67X-MM-CS1

Type C®, USB 3.2 Socket. IP67 Rated

### Product Features

USB Version 3.2 Gen 2 - 10Gbps  
 IP67 Rated  
 Mid mount for reduced height  
 Hybrid SMT and Through Hole  
 Leads with Through Hole Shield Tabs

### Performance Specifications

#### Materials and Finish

##### Housing

High Temperature Thermoplastic, UL94V-0 Rated,  
 Black Color

##### Shield

Stainless Steel, Nickel Plated

##### Contact Material

Copper Alloy

##### Contact plating

Gold on Contact Area, Tin plated on Solder tails, all over  
 Nickel Underplate

### Electrical Characteristics

#### Rated Current

5.0A Inclusive (1.25A Ea.) For Pins A4, A9, B4, and  
 B9 (VBUS), 1.25A For Pin B5 (VCONN)  
 6.25A Inclusive For Pins, A1, A12, B1, and B12 (GND)  
 and Mid Plane

0.25A For All Other Pins

#### Rated Voltage

30V

#### Insulation Resistance

100 Megohms Min. at 100V DC

#### Contact Resistance

40 milliohms Max.

#### Dielectric Withstanding Voltage

100V AC RMS for 1 Minute

### Mechanical Characteristics

#### Insertion Force

5N - 20N

#### Withdrawal Force

8N - 20N

#### Durability

10000 Mating Cycles Min.

#### Operating Temperature

-40°C to +80°C

2D Drawing	IGES	STEP	3D PDF
Solder Profile	CofC RoHS Compliant	CofC REACH Compliant	UL Plastic File
Certificate of Origin	Check Stock	Request a Sample	Send Us An Email

#### Generated Part Number

#### Part Number Builder



#### Series

KUSB67X-MM - USB Type C, IP67 rated, Mid-Mount

#### Type

CS1 - C Type

#### Insulator Color Option

B - Black

#### Plating Options

15 - 15µ" Gold Plating


#### Packaging

TR - Tape and Reel

Contact Kycon for more options

### KUSB67X-MM

Dimensions in mm

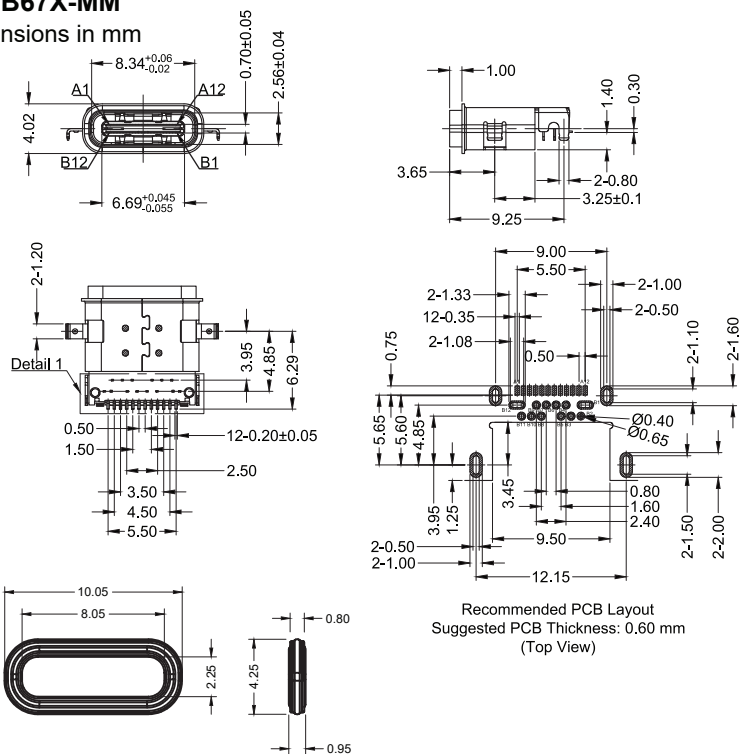

Recommended PCB Layout  
 Suggested PCB Thickness: 0.60 mm  
 (Top View)

\*KUSB67X-MM-Gasket included

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [USB Connectors](#) category:*

*Click to view products by [Kycon](#) manufacturer:*

Other Similar products are found below :

[65-647-8-BK-BU](#) [950](#) [952](#) [E8144-B01021-L](#) [A-USB A-LP-SMT-C](#) [A-USB B-TOP-C](#) [MUSBA511N5](#) [MUSBD11135](#) [217450-1](#) [CA 6 W LD](#)  
[KMBVX-TH-5S-B30](#) [896-30-004-00-000000](#) [KUSBVX-BS1N-W30](#) [KUSBX-AP-KIT-SCBLK](#) [KUSBX-AS2N-W](#) [KUSBX-SMT2AP1S-W](#)  
[KUSBX-SMT2AP1S-W30](#) [935](#) [957](#) [30-498-6](#) [17-210051](#) [1734082-1](#) [30-1574](#) [30-470](#) [30-489](#) [30-541](#) [30-572-3](#) [MAB 8 SN V](#) [A-USB A-](#)  
[2P-C](#) [MIKROE-1451](#) [USBFTV2PEM2G](#) [USBFTVC6ZN](#) [KUSBX-AS2N-W30](#) [KUSBX-SLAS1N-W](#) [KUSBX-SMT-AS1N-W30](#) [4689-1](#) [1-](#)  
[1734084-2](#) [E8110-001-01](#) [MUSBA81130](#) [33UBARS1-04SW11](#) [33UBAR-04SW11](#) [USBF21ZNSCC](#) [USBBFTV6ZC](#) [10135326-001LF](#)  
[M9177/3-1](#) [USB-A-S-F-B-VT](#) [925](#) [4198](#) [690-024-633-031](#) [KUSBEX-BSFS1N-W](#)