

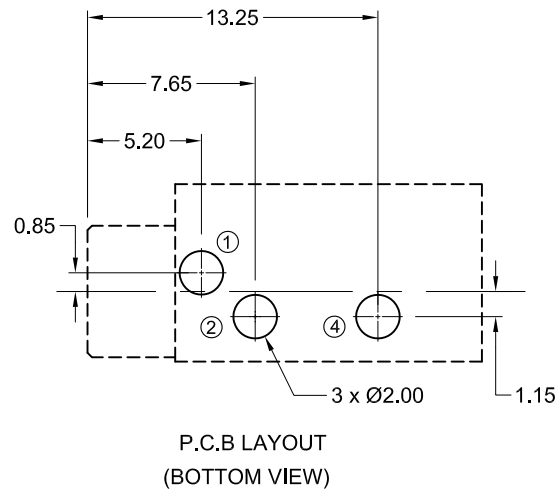


M6 Thread  
Pitch: 0.5  
Knurled Nut Included  
(Not Installed)

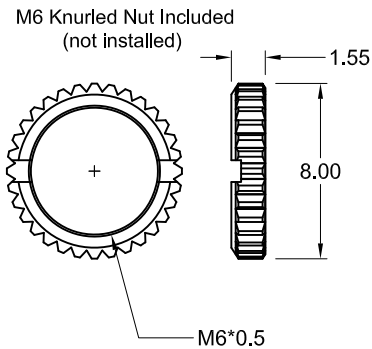

Schematic



Materials and Finish

Housing: PBT Thermoplastic  
UL 94V-0 Rated, Black Color  
Contact Material:  
Pin #1: Brass, Matte Tin Plated  
Pin #2 and Pin #4:  
Phosphor Bronze, Matte  
Tin Plated

Electrical Characteristics

Insulation Resistance:  
100 Megohms at 500V DC  
Contact Resistance:  
50 milliohms Max.  
Dielectric Withstanding Voltage:  
500V AC RMS for 1 Minute

Mechanical Characteristics

Insertion Force: 0.3kg - 3.0kg  
Withdrawal Force: 0.3kg - 3.0kg  
Durability: 5000 Mating Cycles Min.  
Operating Temperature:  
-25°C to +85°C  
Torque : 1.5lb-in Max.

Tolerances
X.X ± 0.30
X.XX ± 0.15
Unless Stated Otherwise



REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A0	03/29/18	New Drawing	G. Serrato	C. Furumasu	G. Serrato	03/29/18
A1	11/06/18	Release Drawing DC 18-009	D. Shehan	C. Kelleher		
A2	12/05/18	ECO #18-061	G. Serrato	D. Shehan		

STX-3150-3C-1

Stereo Jack, Straight Black Cover, 3 Pos

Thread w/ Nut, RoHS Compliant



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Phone Connectors](#) category:*

*Click to view products by [Kycon](#) manufacturer:*

Other Similar products are found below :

[M444B](#) [6J1041A](#) [R4F](#) [E12BPKG](#) [ECP4PKG](#) [161-3502L-E](#) [MT333X](#) [171-0350-EX](#) [171-101A-EX](#) [171-3325-EX](#) [176S](#) [NC3MG-V](#)  
[NYS228G](#) [P10834](#) [P2380](#) [P2381X](#) [P2411X](#) [P2412](#) [P2724](#) [JM2PB-AU BULK](#) [9144](#) [S2674](#) [280L](#) [163-156N-2-E](#) [163-158N-2-E](#) [171-3308-](#)  
[EX](#) [171-3500-E](#) [2501FT](#) [CMT335](#) [M10662](#) [330Q](#) [RJ5VI-S](#) [40116](#) [TM1R-AU](#) [TM2PBMJ-AU](#) [TM2PJ-AU](#) [TM2PJ-AU BULK](#) [4803.1351](#)  
[49201](#) [49205](#) [TS3PBJ-AU](#) [TS3PBMJ-AU](#) [TT32BX](#) [54B](#) [40112](#) [40205](#) [415](#) [XMT332B](#) [52170017-331](#) [570](#)