

**Materials and Finish**


Housing: High Temperature Thermoplastic, UL 94V-0 Rated, Black Color  
 Contact Material:  
 Contact #4: Stainless Steel  
 All Other Contacts: Copper Alloy  
 Contact Plating: Gold Flash Over Nickel Underplate

**Electrical Characteristics**

Insulation Resistance:  
 100 Megohms Min. at 500V DC  
 Contact Resistance:  
 50 milliohms Max. (Initial)  
 100 milliohms Max. (Final)  
 Dielectric Withstanding Voltage:  
 250V AC for 1 Minute

**Mechanical Characteristics**

Insertion Force: 0.3kg - 3.0kg  
 Withdrawal Force: 0.3kg - 3.0kg  
 Durability: 5000 Mating Cycles Min.  
 Operating Temperature:  
 -40°C to +85°C  
 Process Temperature:  
 260°C Lead-Free Reflow Soldering

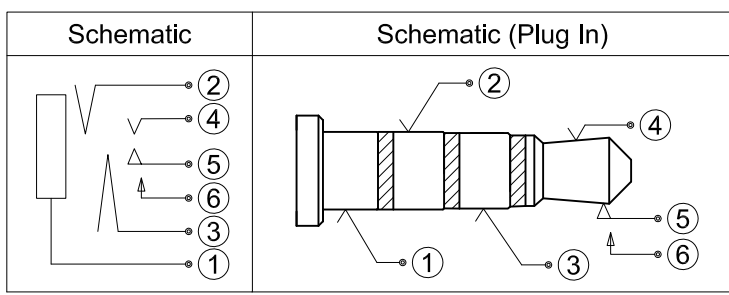


**RoHS COMPLIANT**

Tolerances
X.X ± 0.35
X.XX ± 0.25
Unless Stated Otherwise

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A0	07/28/16	New Drawing	C. Kelleher	W. Cook		
A1	08/17/16	Release Drawing	C. Kelleher	N/A	C. Kelleher	07/21/16

**STX-353K7A-6N-KTTR**



Audio Jack, 3.5mm, Vertical, High-Temp.  
 Through-Hole, RoHS Compliant, Halogen Free



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Phone Connectors](#) category:*

*Click to view products by [Kycon](#) manufacturer:*

Other Similar products are found below :

[M444B](#) [6J1041A](#) [R4F](#) [E12BPKG](#) [ECP4PKG](#) [161-3502L-E](#) [MT333X](#) [171-0350-EX](#) [171-101A-EX](#) [171-3325-EX](#) [176S](#) [NC3MG-V](#)  
[NYS228G](#) [P10834](#) [P2380](#) [P2381X](#) [P2411X](#) [P2412](#) [P2724](#) [JM2PB-AU BULK](#) [9144](#) [S2674](#) [280L](#) [163-156N-2-E](#) [163-158N-2-E](#) [171-3308-](#)  
[EX](#) [171-3500-E](#) [2501FT](#) [CMT335](#) [M10662](#) [330Q](#) [RJ5VI-S](#) [40116](#) [TM1R-AU](#) [TM2PBMJ-AU](#) [TM2PJ-AU](#) [TM2PJ-AU BULK](#) [4803.1351](#)  
[49201](#) [49205](#) [TS3PBJ-AU](#) [TS3PBMJ-AU](#) [TT32BX](#) [54B](#) [40112](#) [40205](#) [XMT332B](#) [52170017-331](#) [570](#) [NM3](#)