

Part No. 1001932FT WLAN / BT / Zigbee Tunable Embedded FPC Antenna

2.4 GHz, 5 GHz

Supports: Wi-Fi applications, Agriculture, Automotive, Bluetooth, Zigbee, WLAN, Smart Home, Healthcare, Digital Signage



FPC WiFi Tunable Embedded Antenna with Cable

2.4 GHz: 5 GHz

KEY BENEFITS

Stay-in-Tune

Ethertronics antenna technology provides superior RF field containment, resulting in less interaction with surrounding components.

Quicker Time-to-Market

By optimizing antenna size, performance and emissions, customer and regulatory specifications are more easily met.

Reliability

Products are the latest RoHS version compliant.

APPLICATIONS

- design
- Embedded Telematics
- Cellular,
- Tracking Healthcare
- Headsets, M2M, Tablets
 - Industrial
- Gateway, Access
- devices **Smart Grid**
- Point
- **OBD-II**
- Handheld

Ethertronics' WLAN antennas deliver on the key needs of device designers for higher functionality and performance in smaller/thinner designs. These innovative antennas provide compelling advantages for 2.4 GHz and 5.0 GHz enabled devices.

Real-World Performance and Implementation

Antennas may look alike on the outside, but the important difference is inside. Other antennas may contain simple PIFA or monopole designs that interact with their surroundings, complicating layout or changing performance with use position. Ethertronics antennas utilize patented Isolated Magnetic Dipole (IMD) technology to deliver a unique size and performance combination.

The 1001932FT is offered in many standard cable lengths ranging up to 200mm. Ordering part number guide is located at end of document for selection ease.

Electrical Specifications

Typical Performance using 100 mm cable tested on PC-ABS

| Frequency | 2.400 – 2.485 GHz | 5.150 – 5.825 GHz | | |
|----------------------|--------------------|-------------------|--|--|
| Peak Gain | 2.5 dBi | 4.4 dBi | | |
| Average Efficiency | 60% 71% | | | |
| VSWR Match | 2.0 :1 max | | | |
| Feed Point Impedance | 50 ohms unbalanced | | | |
| Polarization | Linear | | | |
| Power Handling | 0.5 Watt CW | | | |

Mechanical Specifications

| Ordering Part # | 1001932FT-AA10L0100 |
|----------------------|--|
| Dimensions (mm) | 35.2 x 8.5 x 1.6 |
| Weight (grams) | 0.6 |
| Cable/Connector (mm) | Length: 100, Diameter: 1.13, Color: Black; u.Fl compatible connector |
| Mounting | Adhesive on bottom side of antenna |
| Packaging | PE bags |





2.4 / 5 GHz Ethertronics' FPC Embedded Antenna Specifications Ethertronics produces a wide variety of standard and custom antennas to meet user needs.


VSWR, Efficiency and Peak Gain Plots


Typical Performance using 100 mm cable tested on PC-ABS




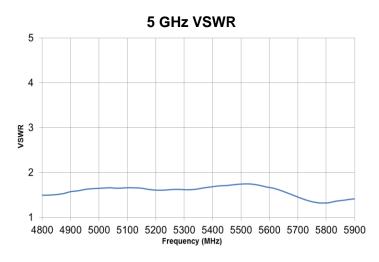

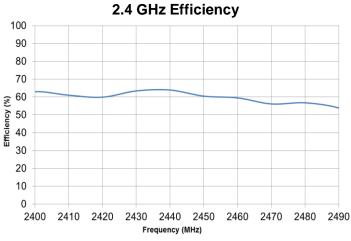

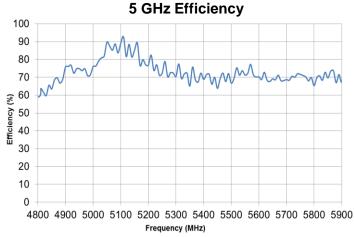

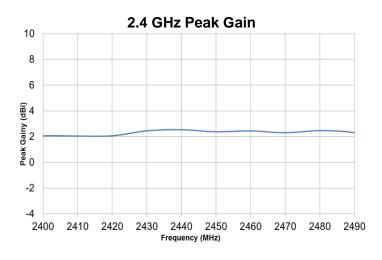

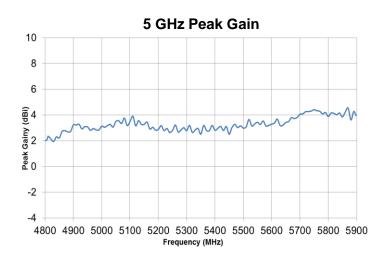




2.4 / 5 GHz Ethertronics' FPC Embedded Antenna Specifications Ethertronics produces a wide variety of standard and custom antennas to meet user needs.

Antenna Radiation Patterns

Typical Performance using 100 mm cable tested on PC-ABS Measured @ 2440, 5450 MHz



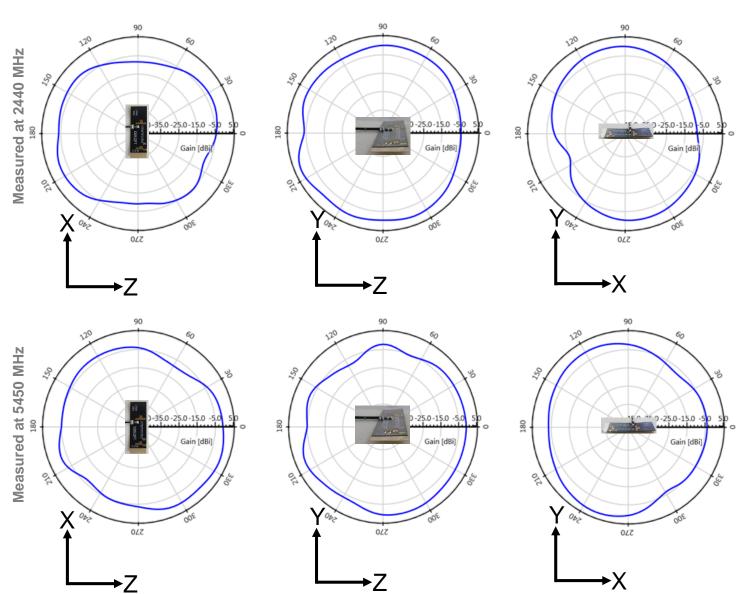



2.4 / 5 GHz Ethertronics' FPC Embedded Antenna Specifications Ethertronics produces a wide variety of standard and custom antennas to meet user needs.

Antenna Tuning Options

Typical Performance using 100 mm cable tested on PC-ABS



*This antenna has unique features enabling limited range RF tuning by leaving P1 - P6 and C1 - C2 connected by "solder bridge" or disconnected with a "cut" to the trace. Refer to detailed tuning options below.

Ref: Baseline = Typical performance using 100 mm cable tested on PC-ABS

Options for Tuning: "2.4GHz (Lower)"

| <u>MODE</u> | <u>T1</u> | <u>T2</u> | <u>T3</u> | <u>T4</u> |
|-----------------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| PADS | Connect: P2 | Connect: P1 | Connect: (P2+P3) | Connect: (P1+P3) |
| Outcome: (Ref: Baseline) | ~200 MHz shift low | ~250 MHz shift low | ~350 MHz shift low | ~370 MHz shift low |

Options for Tuning: "2.4GHz (Higher)"

| <u>MODE</u> | <u>C1</u> | <u>C2</u> |
|-----------------|------------|------------|
| PADS | Cut: C1 | Cut: C2 |
| Outcome: | ~170 MHz | ~300 MHz |
| (Ref: Baseline) | shift high | shift high |

Options for Tuning: "5GHz (Lower)"

| MODE | <u>T5</u> | <u>T6</u> | <u>T7</u> | <u>T8</u> |
|-----------------------------|-----------------------|------------------------|-----------------------|------------------------|
| PADS | Connect: P4 | Connect: (P4+P5) | Connect: P6 | Connect: (P5+P6) |
| Outcome: (Ref: Baseline) | ~200 MHz shift low | ~1500 MHz shift low | ~500 MHz shift low | ~1900 MHz shift low |



2.4 / 5 GHz Ethertronics' FPC Embedded Antenna Specifications Ethertronics produces a wide variety of standard and custom antennas to meet user needs.


Mechanical Dimensions


Typical antenna dimensions (mm)

| Part Number | A (mm) | B (mm) | C (mm) | D (mm) |
|---------------------|----------------|---------------|-----------|-----------|
| 1001932FT-AA10L0100 | 35.2 ± 0.3 | 8.5 ± 0.3 | 1.6 (max) | 100 ± 3.0 |

^{*}Total Height of 1.8 mm includes the cable solder connection

^{*}Height "C" of 0.2 mm includes FPC + adhesive thicknesses

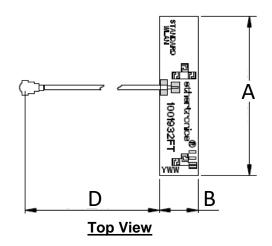

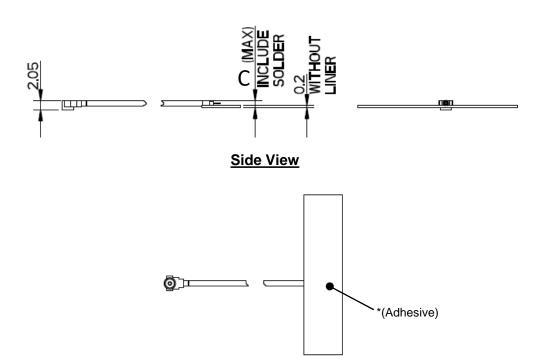

Bottom View



2.4 / 5 GHz Ethertronics' FPC Embedded Antenna Specifications Ethertronics produces a wide variety of standard and custom antennas to meet user needs.

Ordering Part Numbers

Typical antenna dimensions (mm)

| Part Number | A (mm) | B (mm) | C (mm) | D (mm) Cable Length |
|---------------------|----------------|---------------|-----------|------------------------|
| 1001932FT-AA10L0025 | 35.2 ± 0.3 | 8.5 ± 0.3 | 1.6 (max) | 25 ± 3.0 |
| 1001932FT-AA10L0050 | 35.2 ± 0.3 | 8.5 ± 0.3 | 1.6 (max) | 50 ± 3.0 |
| 1001932FT-AA10L0075 | 35.2 ± 0.3 | 8.5 ± 0.3 | 1.6 (max) | 75 ± 3.0 |
| 1001932FT-AA10L0100 | 35.2 ± 0.3 | 8.5 ± 0.3 | 1.6 (max) | 100 ± 3.0 |
| 1001932FT-AA10L0150 | 35.2 ± 0.3 | 8.5 ± 0.3 | 1.6 (max) | 150 ± 4.0 |
| 1001932FT-AA10L0200 | 35.2 ± 0.3 | 8.5 ± 0.3 | 1.6 (max) | 200 ± 4.0 |

^{*}Total Height of 1.8 mm includes the cable solder connection

^{*}Height "C" of 0.2 mm includes FPC + adhesive thicknesses

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by Kyocera AVX manufacturer:

Other Similar products are found below:

GAN30084EU 930-033-R GW17.07.0250E 1513563-1 EXE902SM APAMPG-117 MAF94383 W3908B0100 W6102B0100 YE572113-30RSMM 108-00014-50 66089-2406 SPDA17RP918 A09-F8NF-M A09-F5NF-M RGFRA1903041A1T W3593B0100 W3921B0100 SIMNA-868 SIMNA-915 SIMNA-433 W1044 W1049B090 A75-001 WTL2449CQ1-FRSMM CPL9C EXB148BN 0600-00060 TRA9020S3PBN-001 Y4503 GD5W-28P-NF MA9-7N GD53-25 GD5W-21P-NF C37 MAF94051 MA9-5N EXD420PL B1322NR QWFTB120 MAF94271 MAF94300 GPSMB301 FG4403 AO-AGSM-OM54 5200232 MIKROE-2349 WCM.01.0111 MIKROE-2393 MIKROE-2352