



Part No. 1004259 GPS/GLONASS Ceramic Patch Antenna (Active)

1.575 GHz; 1.602 GHz

Supports: Tracking, Smart Home, Agriculture, Automotive, Healthcare, Digital Signage, Wearables, Industrial Devices



GPS/GLONASS Ceramic Patch antenna (Active)

1.575 GHz; 1.602 GHz

KEY BENEFITS

Reduced Costs & Time-to-Market

Standard antennas eliminate design fees, redesign cycle time and minimize risk associated with customer solution. Quicker time to market.

Quicker Time-to-Market

By optimizing antenna size, performance and emissions, customer and regulatory specifications are more easily met. Reliability

M2M, Industrial

recommended

environments

devices

OBD-II

in harsh

Not

Smart Grid

Products are the latest RoHS version compliant.

APPLICATIONS

- Embedded design
- designPOS, Headsets,
- Tablets
 Gateway,
- Access Point
 Telematics
- Telemanos
- Tracking
- Healthcare

Ethertronics' antennas deliver on the key needs of device designers for higher functionality and performance in smaller/thinner designs. These innovative antennas provide compelling advantages for GPS/GLONASS enabled handheld devices, media players and other mobile communications devices.

GPS/GLONASS active patch antenna solution utilizes a Low Noise Amplifier (LNA) mounted on a PCB for superior performance.

Electrical Specifications

Typical Characteristics, on 70 x 70 mm PCB ground plane.

Frequency	1.575 GHz	1.593 – 1.610 GHz	
GNSS Bands	GPS	GLONASS	
Center Frequency fo	1.575 GHz	1.602 GHz	
Gain at Zenith	5.0 dBic (typ)		
Output VSWR	1.5 (typ)		
Average Efficiency	79%		
Impedance	50 ohm		
Polarization	R.H.C.P		
Operation Voltage	$3.0 \pm 0.1 \text{ V}$		
LNA/Filter Gain	$20 \pm 3 dB (DC = 3.0 V)$		
Operation Temperature	-40 to +85 °C		

Mechanical Specifications & Ordering Part Number


Ordering Part Number	1004259	
Size (mm)	25 x 25 x 6.5 mm	
Mounting	Attached to flat surface	
Weight (grams)	11.2	
Connector	IPEX MHF	
Cable (mm)	RF Ø 1.13 Gray, 76.0 ± 3	
Storage Temperature (°C)	-40 to +85	
Packaging	Plastic Tray	



GPS / GLONASS Active Patch Embedded Ethertronics' Antenna Specifications Ethertronics produces a wide variety of standard and custom antennas to meet user needs.


VSWR and Efficiency Gain Plots

Typical performance on 70 x 70 mm PCB

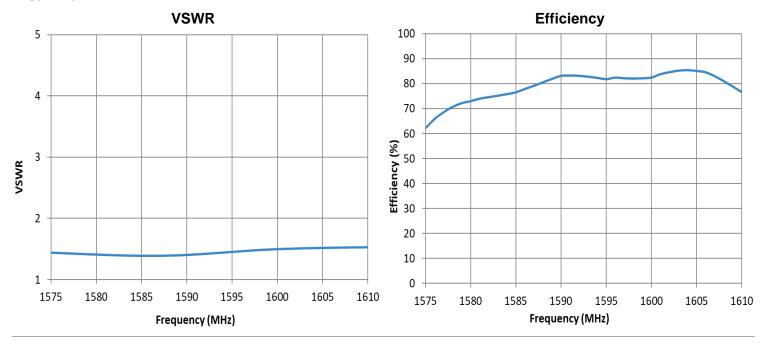

Axial Ratio/RHCP charts

Typical performance on 70 x 70 mm PCB

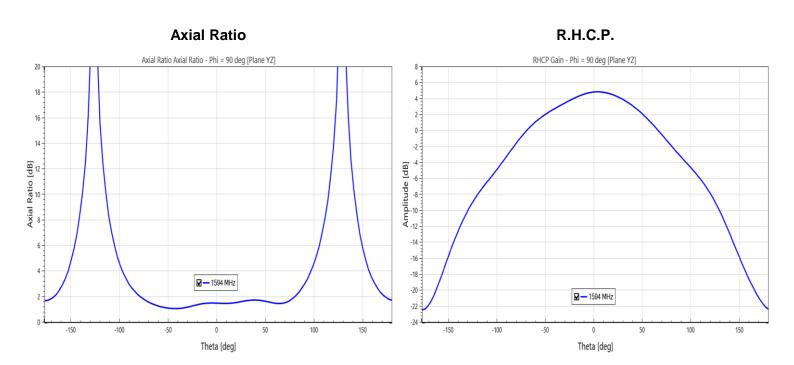





GPS / GLONASS Active Patch Embedded Ethertronics' Antenna Specifications Ethertronics produces a wide variety of standard and custom antennas to meet user needs.


Antenna Radiation Patterns


Typical performance on 70 x 70 mm PCB Measured @ 1575, 1602 MHz























GPS / GLONASS Active Patch Embedded Ethertronics' Antenna Specifications Ethertronics produces a wide variety of standard and custom antennas to meet user needs.

Filter/LNA Specifications


Gain	20 ± 3dB (3.0 ± 0.1V)		
Voltage (Vcc)	$3.0 \pm 0.1 \text{V}$		
Current (lin)	4.5±1.5 mA		
Output VSWR	2.0 max (DC = 3.0V)		

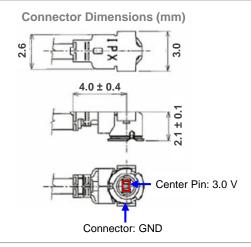

Mechanical Dimensions

Typical antenna dimensions (mm)

Part Number	A (mm)	B (mm)	C (mm)	D (mm)
1004259	25.0	25.0	6.5	76.0 ± 3.0

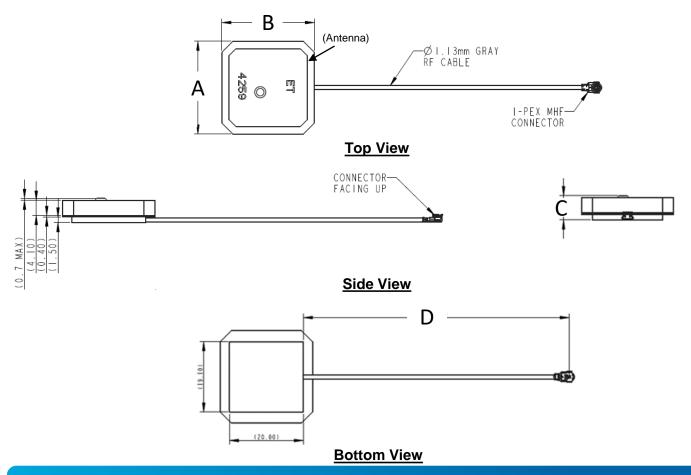

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by Kyocera AVX manufacturer:

Other Similar products are found below:

GAN30084EU 930-033-R GW17.07.0250E 1513563-1 EXE902SM APAMPG-117 MAF94383 W3908B0100 W6102B0100 YE572113-30RSMM 108-00014-50 66089-2406 SPDA17RP918 A09-F8NF-M A09-F5NF-M RGFRA1903041A1T W3593B0100 W3921B0100 SIMNA-868 SIMNA-915 SIMNA-433 W1044 W1049B090 A75-001 WTL2449CQ1-FRSMM CPL9C EXB148BN 0600-00060 TRA9020S3PBN-001 Y4503 GD5W-28P-NF MA9-7N GD53-25 GD5W-21P-NF C37 MAF94051 MA9-5N EXD420PL B1322NR QWFTB120 MAF94271 MAF94300 GPSMB301 FG4403 AO-AGSM-OM54 5200232 MIKROE-2349 WCM.01.0111 MIKROE-2393 MIKROE-2352