


RF/Microwave Capacitors

RF/Microwave Multilayer Capacitors (MLC)

100C Series Porcelain Superchip® Multilayer Capacitors



FEATURES

- Case C Size (.250" x .250")
- Capacitance Range 1pF to 2700pF
- Extended WVDC up to 3600 VDC
- Low ESR/ESL
- High Q
- Low Noise
- Ultra-Stable Performance
- High Self-Resonance
- Established Reliability (QPL)

GENERAL DESCRIPTION

AVX, the industry leader, offers new improved ESR/ESL performance for the 100C Series RF Capacitors. This high Q multilayer capacitor is ultra-stable under high RF current and voltage applications. High density Porcelain construction provides a rugged, hermetic package.

AVX offers an encapsulation option for applications requiring extended protection against arc-over and corona.

PACKAGING OPTIONS



Tape & Reel



Tray
(180 pcs)



FUNCTIONAL APPLICATIONS

- Bypass
- Impedance Matching
- Coupling
- DC Blocking
- Tuning

CIRCUIT APPLICATIONS

- VHF/UHF RF Power Amplifiers
- Plasma Chambers
- Antenna Tuning
- Medical (MRI coils)

ENVIRONMENTAL CHARACTERISTICS

Thermal Shock	MIL-STD-202, Method 107, Condition A
Moisture Resistance	MIL-STD-202, Method 106
Low Voltage Humidity	MIL-STD-202, Method 103, Condition A, with 1.5 Volts DC applied while subjected to an environment of 85°C with 85% relative humidity for 240 hours min.
Life Test	MIL-STD-202, Method 108, for 2000 hours, at 125°C. Voltage applied. 200% of WVDC for capacitors rated at 500 volts DC or less. 120% of WVDC for capacitors rated at 1250 volts DC or less. 100% of WVDC for capacitors rated above 1250 volts DC.
Termination Styles	Available in various surface mount and leaded styles. See Mechanical Configurations
Terminal Strength	Terminations for chips and pellets withstand a pull of 10 lbs. min., 20 lbs. typical, for 5 seconds in direction perpendicular to the termination surface of the capacitor. Test per MIL-STD-202, method 211.

ELECTRICAL SPECIFICATIONS

Temperature Coefficient (TCC)	+90 ±30 PPM/°C (-55°C to +125°C)
Insulation Resistance (IR)	1 pF to 2700 pF: 10 ⁵ Megohms min. @ +25°C at rated WVDC. 10 ⁴ Megohms min. @ +125°C at rated WVDC. Max. test voltage is 500 VDC.
Working Voltage (WVDC)	See Capacitance Values Table
Dielectric Withstanding Voltage (DWV)	250% of WVDC for capacitors rated at 500 volts DC or less for 5 seconds. 150% of WVDC for capacitors rated at 1250 volts DC or less for 5 seconds. 120% of WVDC for capacitors rated above 1250 Volts DC for 5 seconds
Retrace	Less than ±(0.02% or 0.02 pF), whichever is greater.
Aging Effects	None
Piezoelectric Effects	None
Capacitance Drift	±(0.02% or 0.02 pF), whichever is greater.
Operating Temperature Range	From -55°C to +125°C (No derating of working voltage)

RF/Microwave Capacitors

RF/Microwave Multilayer Capacitors (MLC)

100C Series Porcelain Superchip® Multilayer Capacitors




CAP. CODE	CAP. (pF)	TOL.	RATED WVDC		CAP. CODE	CAP. (pF)	TOL.	RATED WVDC		CAP. CODE	CAP. (pF)	TOL.	RATED WVDC		CAP. CODE	CAP. (pF)	TOL.	RATED WVDC	
			STD.	EXT.				STD.	EXT.				STD.	EXT.				STD.	EXT.
1R0	1.0	B, C, D	2500	3600	5R1	5.1	B, C, D	2500	3600	390	39	F, G, J, K, M	2500	3600	301	300	F, G, J, K, M	1500	2000
1R1	1.1				5R6	5.6				430	43				331	330			
1R2	1.2				6R2	6.2				470	47				361	360			
1R3	1.3				6R8	6.8				510	51				391	390			
1R4	1.4				7R5	7.5				560	56				431	430			
1R5	1.5				8R2	8.2				620	62				471	470			
1R6	1.6				9R1	9.1				680	68				511	510			
1R7	1.7				100	10				750	75				561	560			
1R8	1.8				110	11				820	82				621	620			
1R9	1.9				120	12				910	91				681	680			
2R0	2.0	B, C, D	2500	3600	130	13	F, G, J, K, M	2500	3600	101	100	F, G, J, K, M	2500	3000	751	750	F, G, J, K, M	1000	1500
2R1	2.1				150	15				111	110				821	820			
2R2	2.2				160	16				121	120				911	910			
2R4	2.4				180	18				131	130				102	1000			
2R7	2.7				200	20				151	150				112	1100			
3R0	3.0				220	22				161	160				122	1200			
3R3	3.3				240	24				181	180				152	1500			
3R6	3.6				270	27				201	200				182	1800			
3R9	3.9				300	30				221	220				222	2200			
4R3	4.3				330	33				241	240				242	2400			
4R7	4.7	360	36	271	270	272	2700												

VRMS = 0.707 x WVDC

• SPECIAL VALUES, TOLERANCES, HIGHER WVDC AND MATCHING AVAILABLE. • ENCAPSULATION OPTION AVAILABLE. PLEASE CONSULT FACTORY.

HOW TO ORDER

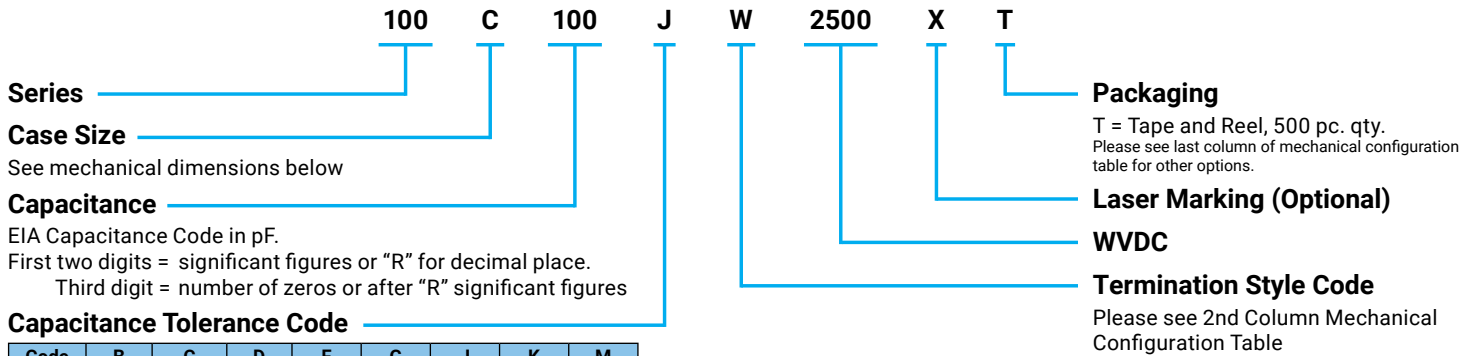

The above part number refers to a 100 C Series (case size C) 10 pF capacitor, J tolerance (±5%), 2500 WVDC, with W termination (Tin/Lead, Solder Plated over Nickel Barrier), laser marking and 500 pc T&R packaging.

RF/Microwave Capacitors

RF/Microwave Multilayer Capacitors (MLC)

100C Series Porcelain Superchip® Multilayer Capacitors



MECHANICAL CONFIGURATIONS

ATC SERIES & CASE SIZE	ATC TERM. CODE	CASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS INCHES (MM)			LEAD AND TERMINATION DIMENSIONS AND MATERIALS		Pkg. Type	Pkg Code	
				LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIALS			
100C	W	Solder Plate		.230±.020 -.010 (5.84±0.51-0.25)	.250 ±.015 (6.35 ±0.38)	.145(3.68) max. for capacitance values ≤680pF	.040 (1.02) max.	Tin/Lead, Solder Plated over Nickel Barrier Termination	T&R, 250 or 500 pcs Tray, 36 or 180 pcs	T250 or T J36 or J180	
100C	P	Pellet		.230±.025 -.010 (5.84±0.64-0.25)				Heavy Tin/Lead Coated, over Nickel Barrier Termination	T&R, 250 or 500 pcs Tray, 36 or 180 pcs	T250 or T J36 or J180	
100C	T	Solderable Nickel Barrier		.230±.020 -.010 (5.84±0.51-0.25)				RoHS Compliant Tin Plated over Nickel Barrier Termination	T&R, 250 or 500 pcs Tray, 36 or 180 pcs	T250 or T J36 or J180	
100C	MS	Microstrip		.245 ±.025 (6.22 ±0.64)			.165(4.19) max. for capacitance values >680pF	N/A	High Purity Silver Leads $L_L = .500$ (12.7) min. $W_L = .240 \pm .005$ (6.10 ±.127) $T_L = .004 \pm .001$ (.102 ±.025) Leads are Attached with High Temperature Solder.	Tray, 24 or 60 pcs	J24 or J60
100C	AR	Axial Ribbon							Silver-plated Copper Leads $L_L = 2.25$ (57.15) min. Dia. = .032 ±.002 (0.81 ±0.05)	Tray, 24 or 60 pcs	J24 or J60
100C	AW	Axial Wire		Silver Leads $L_L = .500$ (12.7) min. $W_L = **$ See below $T_L = .004 \pm .001$ (.102 ±.025)			Box, 21 pcs		B21		
100C	VA	Vertical Axial Ribbon		Silver-plated Copper Leads $L_L = 1.0$ (25.4) min. Dia. = .032 ±.002 (0.81 ±0.05)			Box, 24 pcs		B24		
100C	RW	Radial Wire			Tray, 16 pcs	J16					

RF/Microwave Capacitors

RF/Microwave Multilayer Capacitors (MLC)

100C Series Porcelain Superchip® Multilayer Capacitors



NON-MAGNETIC MECHANICAL CONFIGURATIONS

ATC SERIES & CASE SIZE	ATC TERM. CODE	CASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS INCHES (MM)			LEAD AND TERMINATION DIMENSIONS AND MATERIALS		Pkg. Type	Pkg Code
				LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIALS		
100C	WN	Non-Mag Solder Plate		.230±.025 -.010 (5.84±0.64-0.25)	.250 ±.015 (6.35 ±0.38)	.145(3.68) max. for capacitance values ≤680pF .165(4.19) max. for capacitance values >680pF	.040 (1.02) max.	Tin/Lead, Solder Plated over Non-Magnetic Barrier Termination	T&R, 250 or 500 pcs Tray, 36 or 180 pcs	T250 or T J36 or J180
100C	PN	Non-Mag Pellet		.230±.035-.010 (5.84±0.89-0.25)				Heavy Tin/Lead Coated, over Non-Magnetic Barrier Termination	T&R, 250 or 500 pcs Tray, 36 or 180 pcs	T250 or T J36 or J180
100C	TN	Non-Mag Solderable Nickel Barrier		.230±.025 -.010 (5.84±0.64-0.25)				RoHS Compliant Tin Plated over Non-Magnetic Barrier Termination	T&R, 250 or 500 pcs Tray, 36 or 180 pcs	T250 or T J36 or J180
100C	MN	Non-Mag Microstrip		.245 ±.025 (6.22 ±0.64)				High Purity Silver Leads L _L = .500 (12.7) min. W _L = .240 ±.005 (6.10 ±.127) T _L = .004 ±.001 (.102 ±.025) Leads are Attached with High Temperature Solder.	Tray, 24 or 60 pcs	J24 or J60

SUGGESTED MOUNTING PAD DIMENSIONS

Horizontal Electrode Orientation

Vertical Electrode Orientation

Case C Vertical Mount

Cap Value	Pad Size	A Min.	B Min.	C Min.	D Min.
< 680 pF	Normal	.150	.050	.200	.300
	High Density	.130	.030	.200	.260
> 680 pF	Normal	.185	.050	.200	.300
	High Density	.165	.030	.200	.260

Horizontal Mount

All Values	Pad Size	A Min.	B Min.	C Min.	D Min.
All Values	Normal	.280	.050	.200	.300
	High Density	.260	.030	.200	.260






RF/Microwave Capacitors

RF/Microwave Multilayer Capacitors (MLC)

100C Series Porcelain Superchip® Multilayer Capacitors



PERFORMANCE DATA

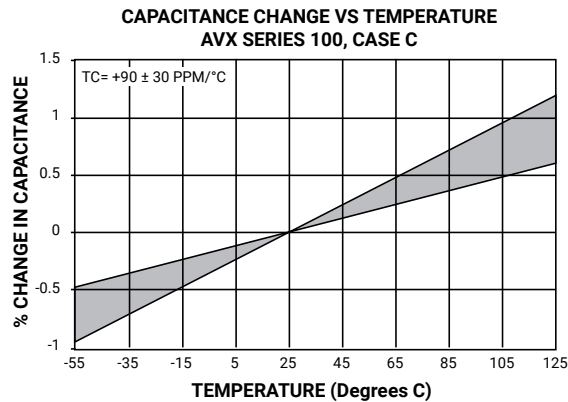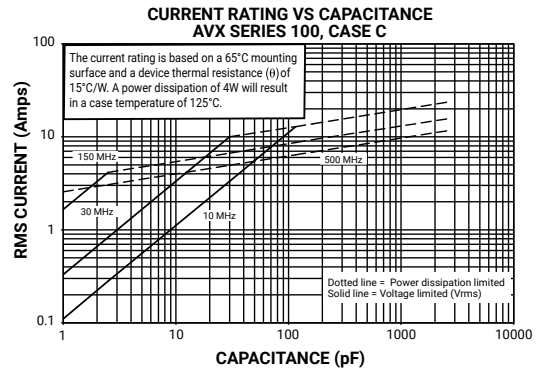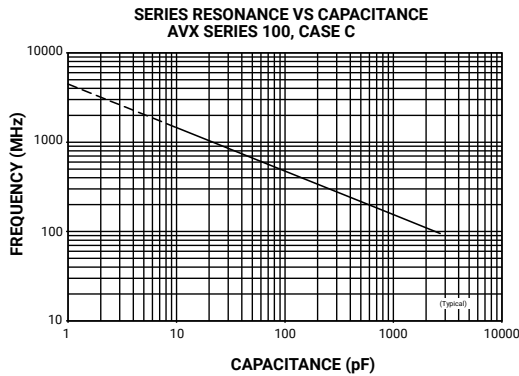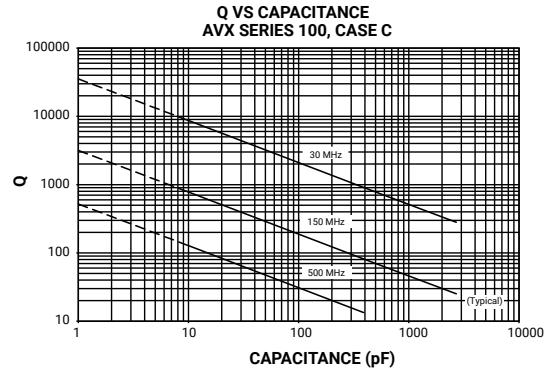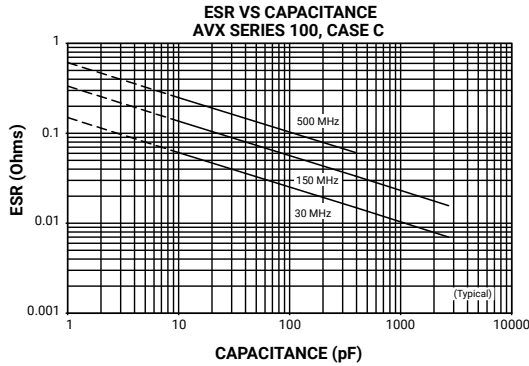

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Silicon RF Capacitors / Thin Film category](#):

Click to view products by [Kyocera AVX manufacturer](#):

Other Similar products are found below :

[MA4M3050](#) [MA4M3100](#) [MA4M3010](#) [MV0204CA1R0MQAW](#) [MV0802CA150MAAW](#) [MV0804CA1R0MABW](#) [MV3204CA150MABW](#)
[02013J3R0ABSTR](#) [02015J1R2ABSTR](#) [04021JR05Z4STR\500](#) [400Z0R1AT100T](#) [400Z0R1PT100T](#) [400Z100FT16T](#) [400Z150FT16T](#)
[400Z170FT16T](#) [400Z180FT16T](#) [400Z1R8QT25T](#) [400Z2R0QT25T](#) [400Z2R4QT25T](#) [400Z3R0AT25T](#) [400Z4R7AT25T](#) [400Z5R6BT25T](#)
[400Z8R2BT16T](#) [04023J4R6ABSTR](#) [02013J1R8PBSTR](#) [02015J0R9PBSTR](#) [02015J1R0PBSTR](#) [0201ZK8R2BBWTR](#) [04021JR65PBSTR](#)
[04021J0R4ZBSTR\500](#) [04023J0R6PBSTR\500](#) [04021J1R4PBSTR\500](#) [02011JR25ZBSTR\500](#) [02015J1R5PBSTR\500](#)
[04025J2R2QBWTR\500](#) [06035J2R2QBSTR](#) [06033J6R8BBSTR](#) [04023J5R6ABSTR](#) [100B300GT500XT](#) [100B1R0CT500XT](#)
[02015J2R0PBSTR\500](#) [100B470GT500XT](#) [700B271JT200XT](#) [100B5R1DT500XT](#) [100B0R6DT500XT](#) [100B160FT500XT](#)
[100B3R3DT500XT](#) [100B180FT500XT](#) [100B2R0DT500XT](#) [04021J0R8P4STR\500](#)