





















# Female Style 1/2 M Press-Fit



## Series 8484

We have Male Style 1/2 M solder, too!




Contact Design and Termination Length	Number of Cavities for Signal Contacts	Number of Cavities for Special Contacts	Loading Description	Part Number Performance classes according to DIN 41612		
				II	I	
5.3 mm (Y) Straight		12 (3 x 4)	4	a + b + c fully loaded	20 8484 012 001 025	20 8484 012 001 049
		30 (3 x 10)	2	a + b + c fully loaded	20 8484 030 001 025	20 8484 030 001 049
9.3 mm (Y) Straight		12 (3 x 4)	4	a + b + c fully loaded	20 8484 012 002 025	20 8484 012 002 049
		30 (3 x 10)	2	a + b + c fully loaded	20 8484 030 002 025	20 8484 030 002 049
16.2 mm (Y) Straight		12 (3 x 4)	4	a + b + c fully loaded	20 8484 012 003 025	20 8484 012 003 049
		30 (3 x 10)	2	a + b + c fully loaded	20 8484 030 003 025	20 8484 030 003 049
23.2 mm (Y) Straight		12 (3 x 4)	4	a + b + c fully loaded	20 8484 012 004 025	20 8484 012 004 049
		30 (3 x 10)	2	a + b + c fully loaded	20 8484 030 004 025	20 8484 030 004 049
13.2 mm (Y) Straight		12 (3 x 4)	4	a + b + c fully loaded	20 8484 012 005 025	20 8484 012 005 049
		30 (3 x 10)	2	a + b + c fully loaded	20 8484 030 005 025	20 8484 030 005 049
18.2 mm (Y) Straight		12 (3 x 4)	4	a + b + c fully loaded	20 8484 012 008 025	20 8484 012 008 049
		30 (3 x 10)	2	a + b + c fully loaded	20 8484 030 008 025	20 8484 030 008 049
12.0 mm (Y) Straight		12 (3 x 4)	4	a + b + c fully loaded	20 8484 012 009 025	20 8484 012 009 049
		30 (3 x 10)	2	a + b + c fully loaded	20 8484 030 009 025	20 8484 030 009 049
20.3 mm (Y) Straight		12 (3 x 4)	4	a + b + c fully loaded	20 8484 012 010 025	20 8484 012 010 049
		30 (3 x 10)	2	a + b + c fully loaded	20 8484 030 010 025	20 8484 030 010 049
Special storch leg 18.7 mm (Y) Straight		12 (3 x 4)	4	a + b + c fully loaded	20 8484 012 011 025	20 8484 012 011 049
		30 (3 x 10)	2	a + b + c fully loaded	20 8484 030 011 025	20 8484 030 011 049
17.0 mm (Y) Straight		12 (3 x 4)	4	a + b + c fully loaded	20 8484 012 012 025	20 8484 012 012 049
		30 (3 x 10)	2	a + b + c fully loaded	20 8484 030 012 025	20 8484 030 012 049


NB: Additional Plating & Loading Variations: Please contact your local AVX sales office or distributor.

Installed using Flat Rock method (see page 66)

### LOADING DESCRIPTION

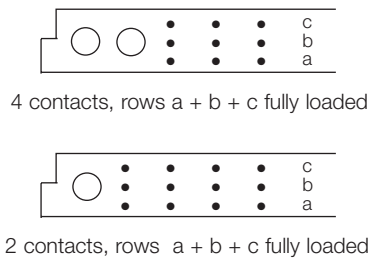

### DIMENSIONS

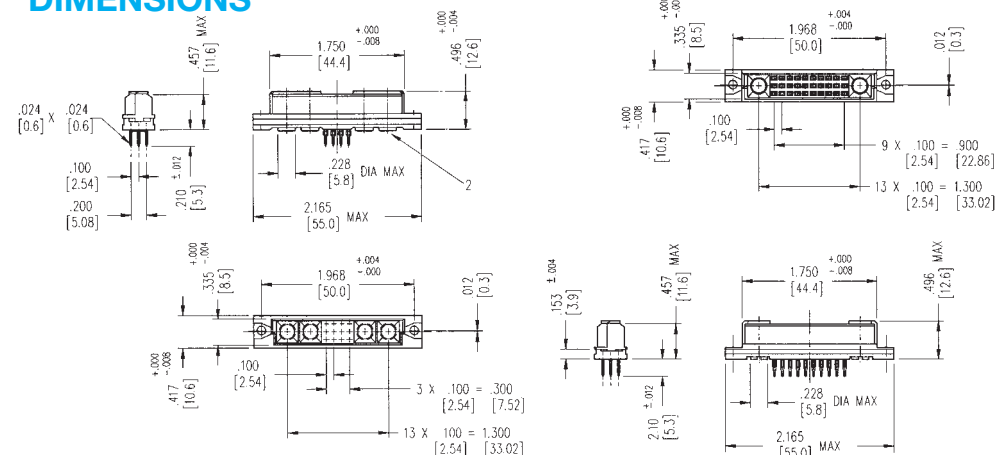

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [DIN 41612 Connectors](#) category:*

*Click to view products by [Kyocera AVX](#) manufacturer:*

Other Similar products are found below :

[004.767](#) [608489050008049](#) [691327-1](#) [74670-0732](#) [74680-0340](#) [75880-0015](#) [76453-0014](#) [86093159ALF](#) [9732967801](#) [QLC260R](#)  
[120X10019X](#) [120X10089X](#) [122A10249X](#) [122A11089X](#) [122A13089X](#) [122A10089X](#) [122A10129X](#) [122A10349X](#) [122A13359X](#) [1377391-4](#)  
[DIN-048CPC-SR1-MH](#) [1393583-2](#) [1393726-7](#) [140X10129X](#) [143-1913-000](#) [143-1908-000](#) [1484472-1](#) [2110070-1](#) [2110070-2](#) [CBC20T00-](#)  
[008FDS5-0-1-002VR](#) [172699-5036](#) [2-1393557-4](#) [2-1437084-2](#) [394506](#) [419-2080-402](#) [V42254B2202C968](#) [419-2086-201](#) [419-2087-002](#)  
[448657-1](#) [448847-3](#) [5-1393755-9](#) [02990000004](#) [054302](#) [043556](#) [09062483201750](#) [0850033067](#) [09031646555](#) [09061486901840](#)  
[09185107324800](#) [102A10019X](#)