


# Wirewound Potentiometer



## Series CLR 1100

- Smaller design
- General purpose panel control
- Dual gang units available
- Robust construction
- RoHS compliant

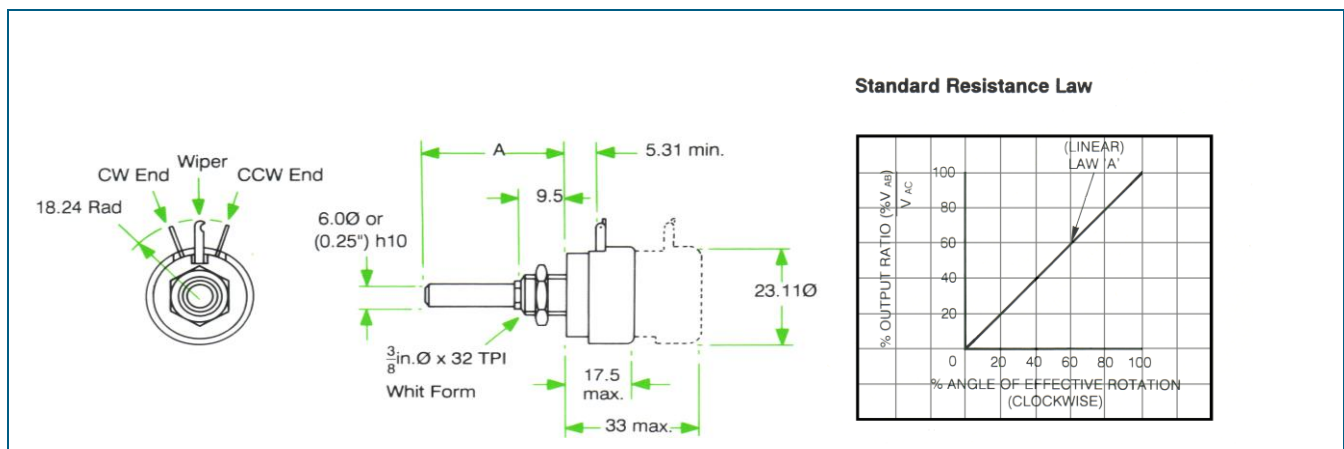

## Technical data

<b>Standard resistance range</b>	50 Ohms to 50,000 Ohms	<b>Power rating</b>	1.0 W @ 20°C (0.5W @ 70°C)
<b>Selection tolerance</b>	+/- 10% (+/- 5% also available)	<b>Isolation voltage</b>	1000 V a.c. peak
<b>Angle of effective rotation</b>	275° +/- 5°	<b>Rotational Noise</b>	100 Ohms E.N.R. maximum
<b>Total mechanical rotation</b>	285° +/- 5°	<b>Linearity</b>	+/- 1.0% typical
<b>Starting torque</b>	7 to 35 mNm	<b>End stop torque</b>	800 mNm maximum
<b>Rotational life</b>	20,000 shaft revolutions		

General purpose wirewound panel control of robust and reliable construction. Phenolic body moulding; beryllium copper contact; nickel plated brass spindle and bush; silver plated brass tags

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Potentiometers](#) category:*

*Click to view products by [Kyocera AVX](#) manufacturer:*

Other Similar products are found below :

[58C2-2](#) [590SX1N32F103SS](#) [591SXJ48S252SC](#) [591SXP56S252SC](#) [591SXP56S503SC](#) [D31409](#) [70B1G048K502X-A](#) [70B1M032S502W](#)  
[70B1N056S202W](#) [70B8N056F502W](#) [70J8N048S104U](#) [70L1N040P103W](#) [70L1N048P103X](#) [70L1N048S103W](#) [GA2L040S102UC](#)  
[GA2L040S103UC](#) [GS1G044P103UA](#) [GS1N048P103UA](#) [GS1T032S103UA](#) [A43-1500](#) [A43-20K](#) [A47-200K](#) [A4720K](#) [RA20LASD251A](#)  
[132-2-0-202](#) [132-0-0-202](#) [RK14K1220-F25-C0-A103](#) [RK14K1220F25C0C104](#) [RK14K1220-F25-C1-B103](#) [14910FAGJSX10102KA](#)  
[14910FBGLFY00103KA](#) [14910AABHSX10103KA](#) [14910FAGJSX10104KA](#) [152-01031](#) [C0342008 5K](#) [P270-109A](#) [J97589](#) [23M728](#)  
[248BBHS0XB25104MA](#) [RV170F-10-15R1-B500K-0021](#) [RV8NAYSB104A](#) [917523A](#) [A43-40](#) [A43-750](#) [A43S-5](#) [A47-15K](#) [A4750K](#)  
[SPPG048S103U](#) [SPPG056P103U](#) [SWE-10](#)