


## **Conductive Polymer**

## **Series LM10 Linear Motion Potentiometer**

- 10mm linear travel
- Flange mounting
- High performance
- · Cost effective solution
- RoHS compliant



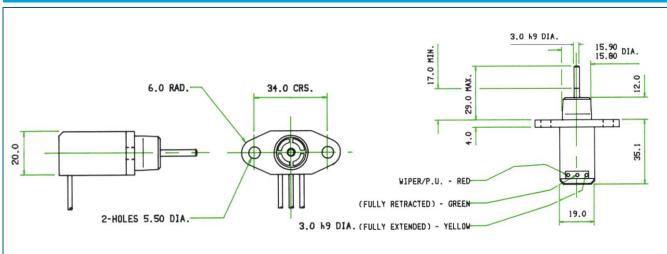

## **Technical data**

Resistance value options	1K, 5K and 10K Ohms	Microgradient in output range 4% to 96%	0.5% over a 2 deg window
Selection tolerance	+/- 20%	Isolation voltage	500V a.c. r.m.s.
Independent linearity	+/- 2.0% typical	Operating temperature	-40°C to +130°C
Output signal temperature coefficient	<25 ppm / °C max	Hysteresis	<0.3%
Effective travel	10mm +/- 0.5mm	Mechanical travel	12.5mm maximum
Endurance	3x10 <sup>6</sup> cycles	Operational force (return spring)	750 grams

Conductive polymer potentiometer with 10mm linear effective travel for automotive and industrial applications. Connection via flying leads colour coded as detailed below, 200 mm in length. Standard spindle is 3mm diameter with a length of 29mm from fixing-face, but other lengths area available upon request

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Potentiometers category:

Click to view products by Kyocera AVX manufacturer:

Other Similar products are found below:

58C2-2 590SX1N32F103SS 591SXJ48S252SC 591SXP56S252SC 591SXP56S503SC D31409 70B1G048K502X-A 70B1M032S502W 70B1N056S202W 70B8N056F502W 70J8N048S104U 70L1N040P103W 70L1N048P103X 70L1N048S103W GA2L040S102UC GA2L040S103UC GS1G044P103UA GS1N048P103UA GS1T032S103UA A43-1500 A43-20K A47-200K A4720K RA20LASD251A 132-2-0-202 132-0-0-202 RK14K1220-F25-C0-A103 RK14K1220F25C0C104 RK14K1220-F25-C1-B103 14910FAGJSX10102KA 14910FBGLFY00103KA 14910AABHSX10103KA 14910FAGJSX10104KA 152-01031 C0342008 5K P270-109A J97589 23M728 248BBHS0XB25104MA RV170F-10-15R1-B500K-0021 RV8NAYSB104A 917523A A43-40 A43-750 A43S-5 A47-15K A4750K SPPG048S103U SPPG056P103U SWE-10