


# Part No. 9001978

## Wi-Fi Dual Band or BT Chip Antenna or UWB Antenna

**2.4 GHz, 5.0 GHz, 6.0 GHz - 8.5 GHz**

Supports: Wi-Fi applications, Agriculture, Bluetooth, Zigbee, WLAN, Smart Home, Healthcare, Digital Signage, UWB



KYOCERA AVX series of chip antennas deliver on the key needs of device designers for higher functionality and performance in smaller/thinner designs.

This antenna designed for Wi-Fi, BT, or UWB applications exhibits the high efficiency in a small footprint and delivers the key needs to the device engineers for the higher functionality and better performance in a smaller and thinner designs.

For further optimization to custom design and for support to integrate and test this antenna performance in your device, contact our Customer Support Team.

### Layout:

9001978-03: Wi-Fi Dual Band  
9001978-01: BT  
9001978-04:UWB

### KEY BENEFITS

#### Greater Flexibility with Unique Form Factors

KYOCERA AVX technology helps you deliver more advanced ergonomic designs without adverse impact on product performance.

#### Quicker Time-to-Market

By optimizing antenna size, performance and emissions, customer and regulatory specifications are more easily met.

#### Environmental Compliance

Comply with latest RoHS requirements

### APPLICATIONS

- Embedded design
- Cellular, Headsets, Tablets
- Gateway, Access Point
- Handheld
- Telematics Tracking
- Healthcare, M2M, Industrial devices
- Smart Grid
- OBD-II
- UWB

### Electrical Specifications

Typical performance on 55 x 25 mm PCB

Frequency (MHz)	2400 – 2485	5150 – 5850	2400 – 2485 (BT ONLY)	6000 – 8500 (UWB ONLY)
Peak Gain	3.0 dBi	3.0 dBi	Refer to Appendix 1	Refer to Appendix 2
Average Efficiency	65%	50%		
VSWR	2.1:1 max	7:1 max		
Feed Point Impedance	50 ohms unbalanced			
Polarization	Linear			
Power Handling	0.5 Watt CW			

### Mechanical Specifications & Ordering Part Number

Ordering Part Number	9001978
Size (mm)	1.00 x 0.55 x 0.40
Mounting	Surface mounted to the PCB
Weight (grams)	0.003
Packaging	Tape & Reel 9001978 – 5,000 pieces per reel
Demo Board	9001978-03 (Wi-Fi Dual Band) 9001978-01 (BT) Appendix 1 9001978-04 (UWB) Appendix 2
Operational Temperature Range	-55 °C to +125 °C
Storage Temperature / Humidity Condition	15 °C to +35 °C / ≤ 65%


Wi-Fi Dual Band or BT KYOCERA AVX Embedded Chip Antenna Specification  
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs

**Antenna Dimensions**


Typical antenna dimensions (mm)

Part Number	L	W	T	B <sub>1</sub>	B <sub>2</sub>
9001978	1.00±0.1	0.55±0.07	0.40±0.1	0.00+0.1	0.20±0.1

\*Antenna can be mounted both ways.

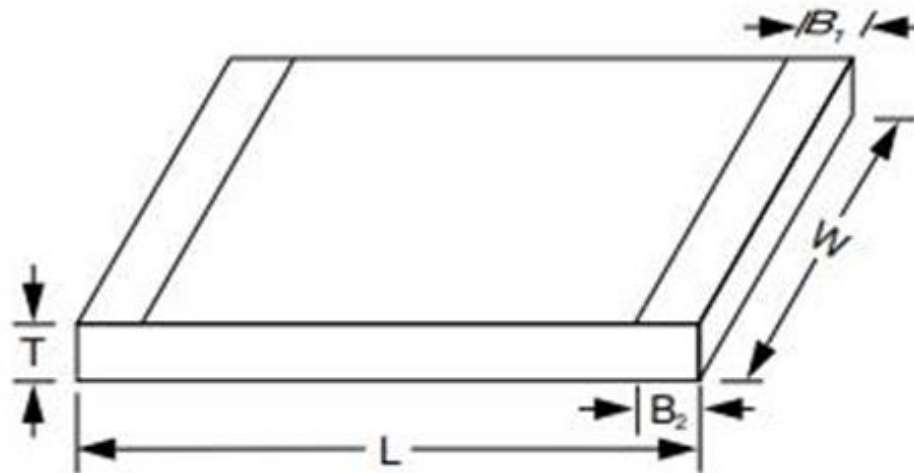

**Lead Free Solder SMT Reflow Temperature Profile**

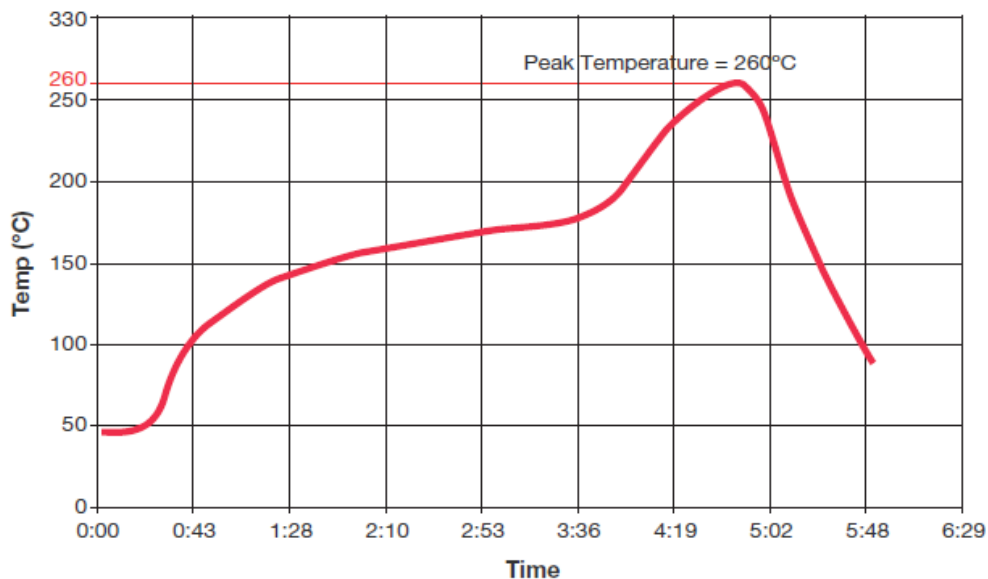


Wi-Fi Dual Band or BT KYOCERA AVX Embedded Chip Antenna Specification  
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs


**VSWR, Efficiency, and Peak Gain Plots**

Typical Performance on 55 x 25 mm PCB


**VSWR  
(2.400 – 2.490) GHz**

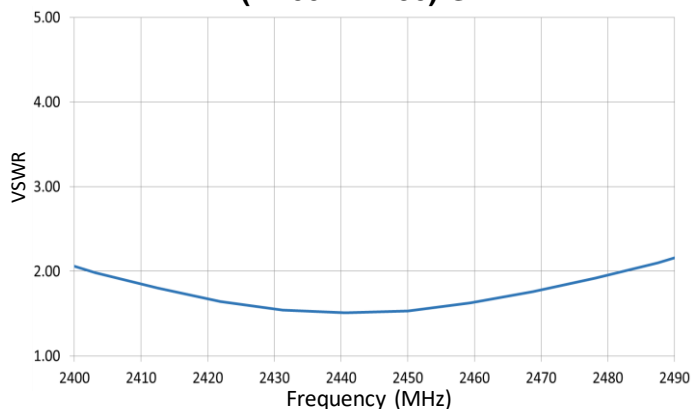


**VSWR  
(5.150 – 5.850) GHz**

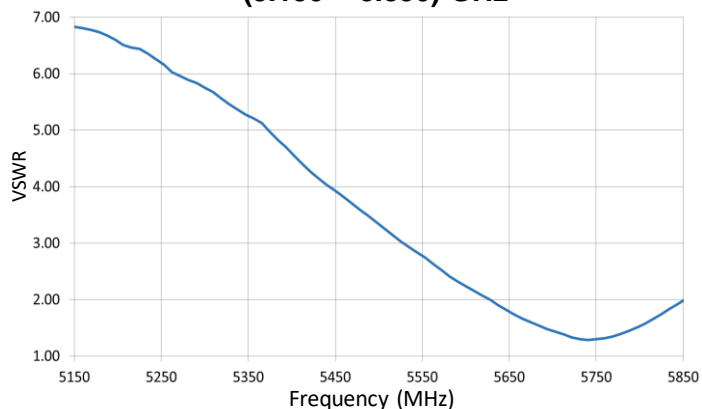


**Efficiency  
(2.400 – 2.490) GHz**

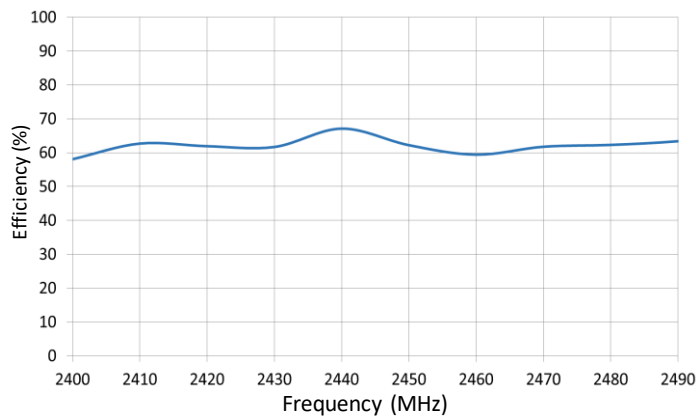


**Efficiency  
(5.150 – 5.850) GHz**

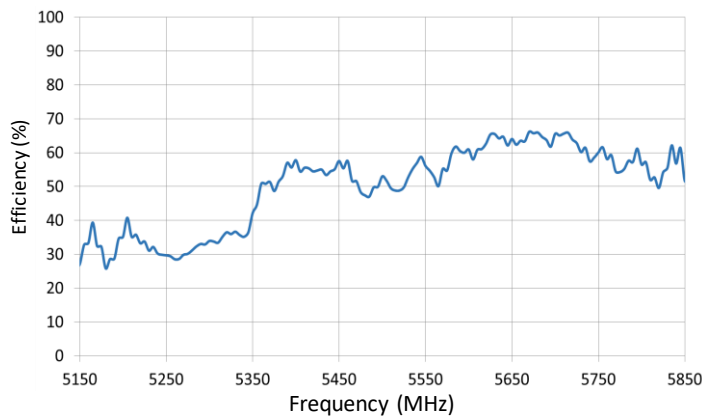

**Peak Gain  
(2.400 – 2.490) GHz**

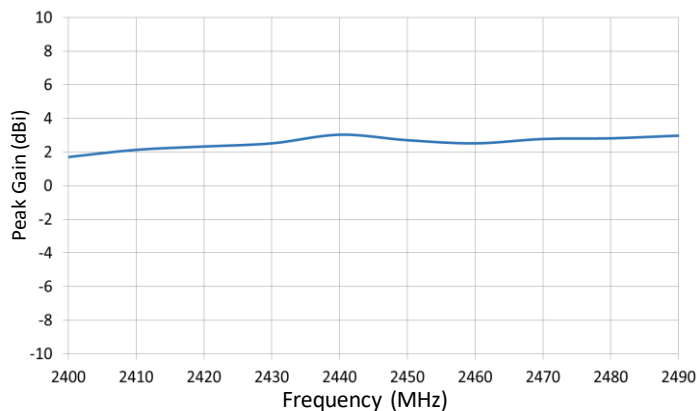




**Peak Gain  
(5.150 – 5.850) GHz**

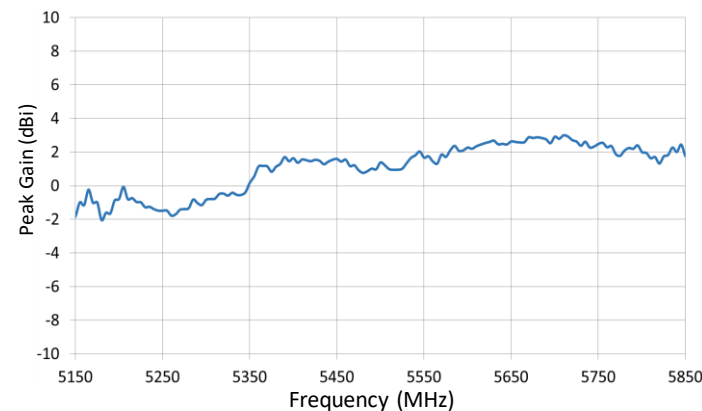

Wi-Fi Dual Band or BT KYOCERA AVX Embedded Chip Antenna Specification  
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs

**Antenna Radiation Patterns**




Typical Performance on 55 x 25 mm PCB  
 Measured @ 2.440 GHz

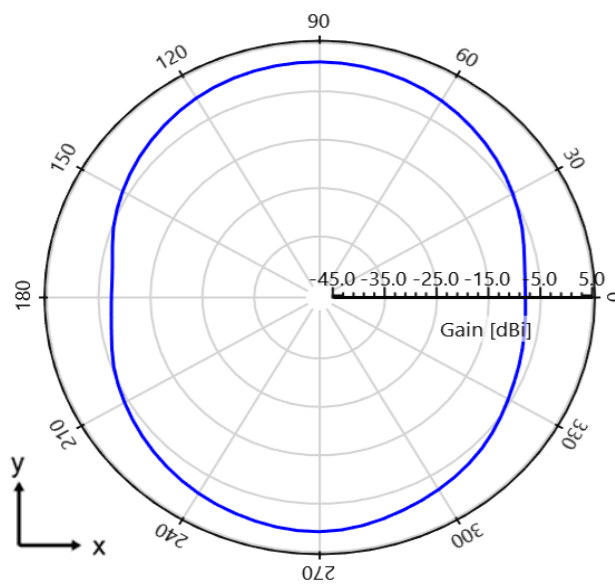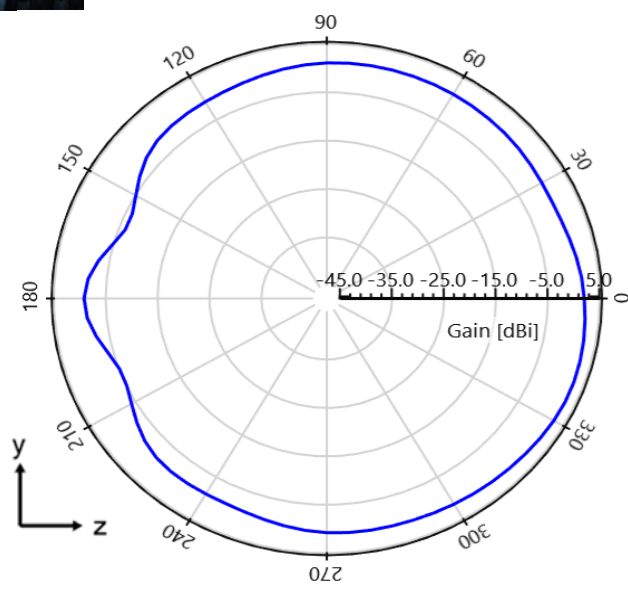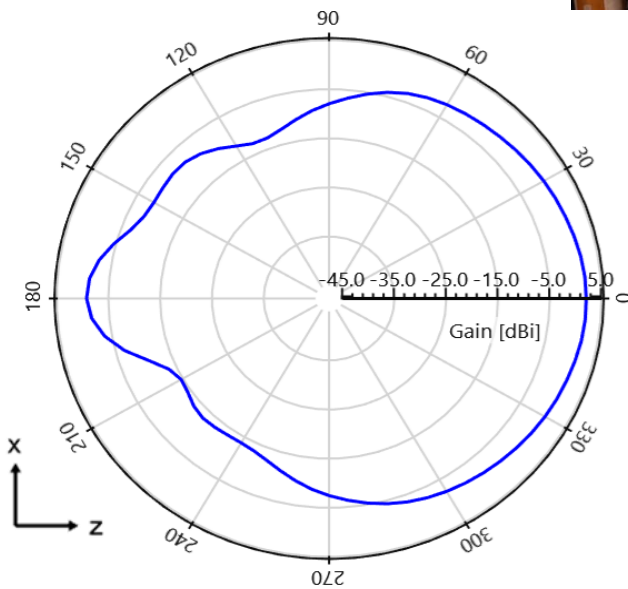

Wi-Fi Dual Band or BT KYOCERA AVX Embedded Chip Antenna Specification  
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs

**Antenna Radiation Patterns**



Typical Performance on 55 x 25 mm PCB  
 Measured @ 5.550 GHz

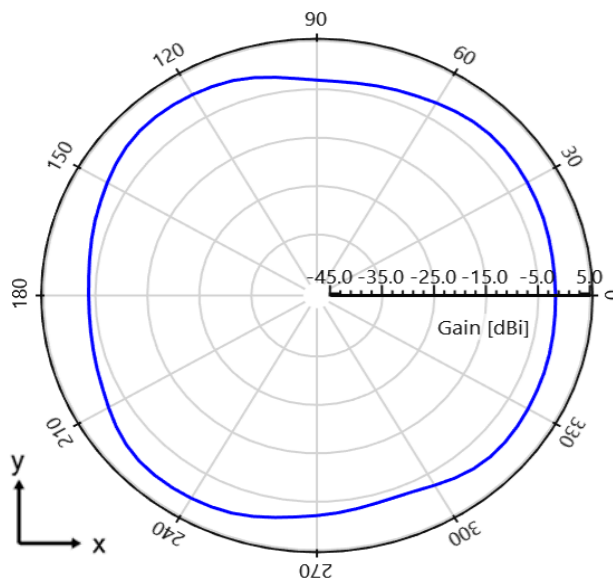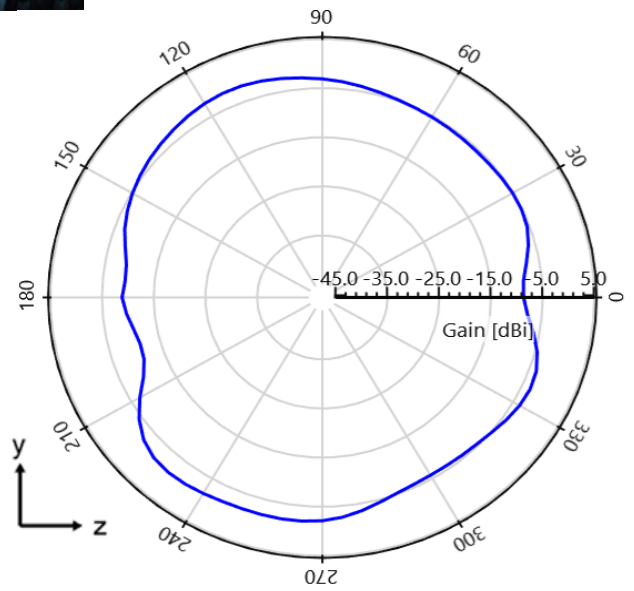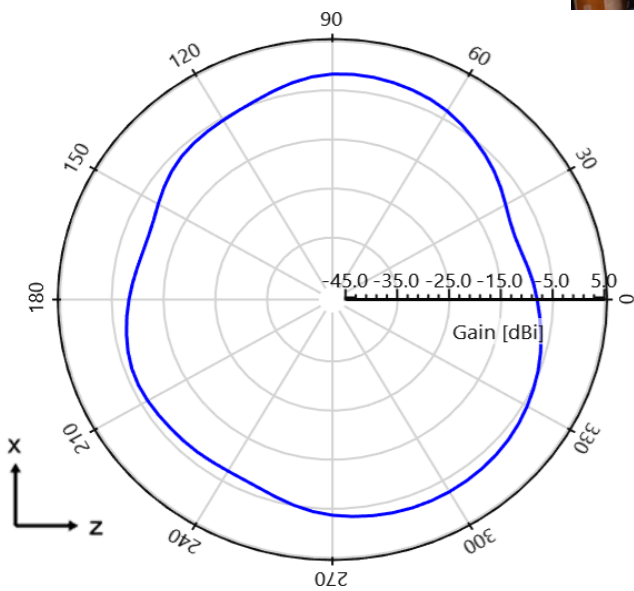

**Wi-Fi Dual Band or BT KYOCERA AVX Embedded Chip Antenna Specification**  
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs

**Antenna Layout (9001978-03)**

Typical layout dimensions (mm)

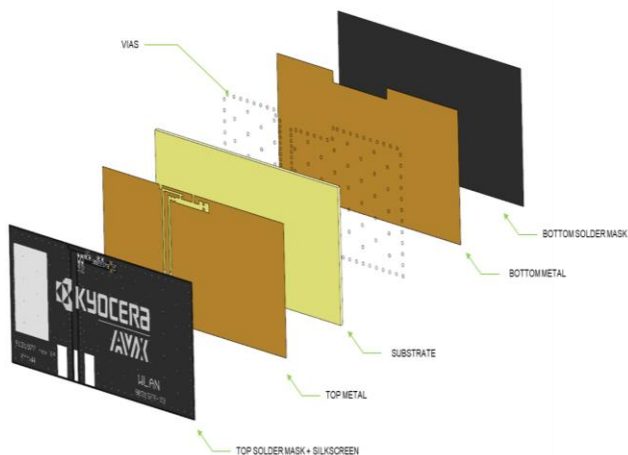

\* VIAS: Diam. 0.2mm, (no vias on transmission lines).  
 Via holes must be covered by solder mask




**Pin Description**

Pin#	Description
1	Feed
2	Ground

**Matching Pi Network (Demo Board)**

Component	Value	Tolerance
P1	1.8nH	±0.05nH
S1	2.4pF	±0.1pF
P2	N/A	N/A
R1	N/A	N/A

\*Actual matching values depend on customer design

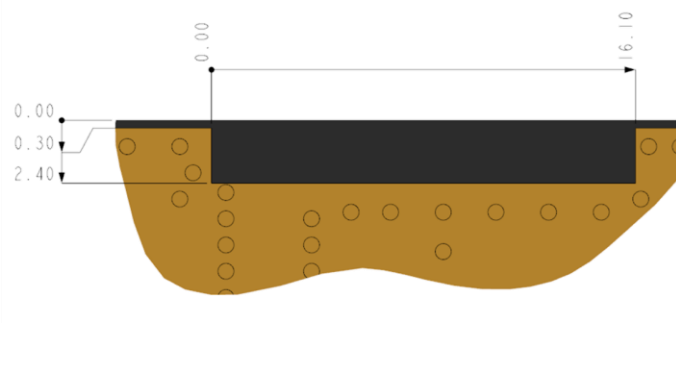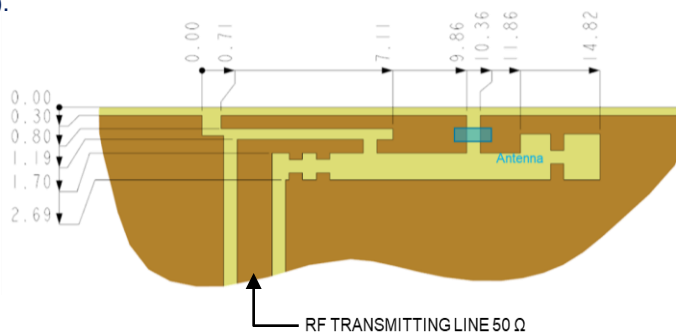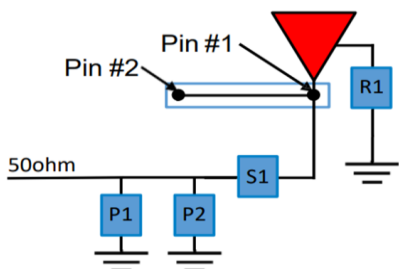


Wi-Fi Dual Band or BT KYOCERA AVX Embedded Chip Antenna Specification  
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs

### Antenna Demo Board (9001978-03)

Typical layout dimensions (mm)

Part Number	A	B	C
9001978-03	(55.0)	(25.0)	(0.80)

\*Dimensions in () parenthesis are Reference Only.

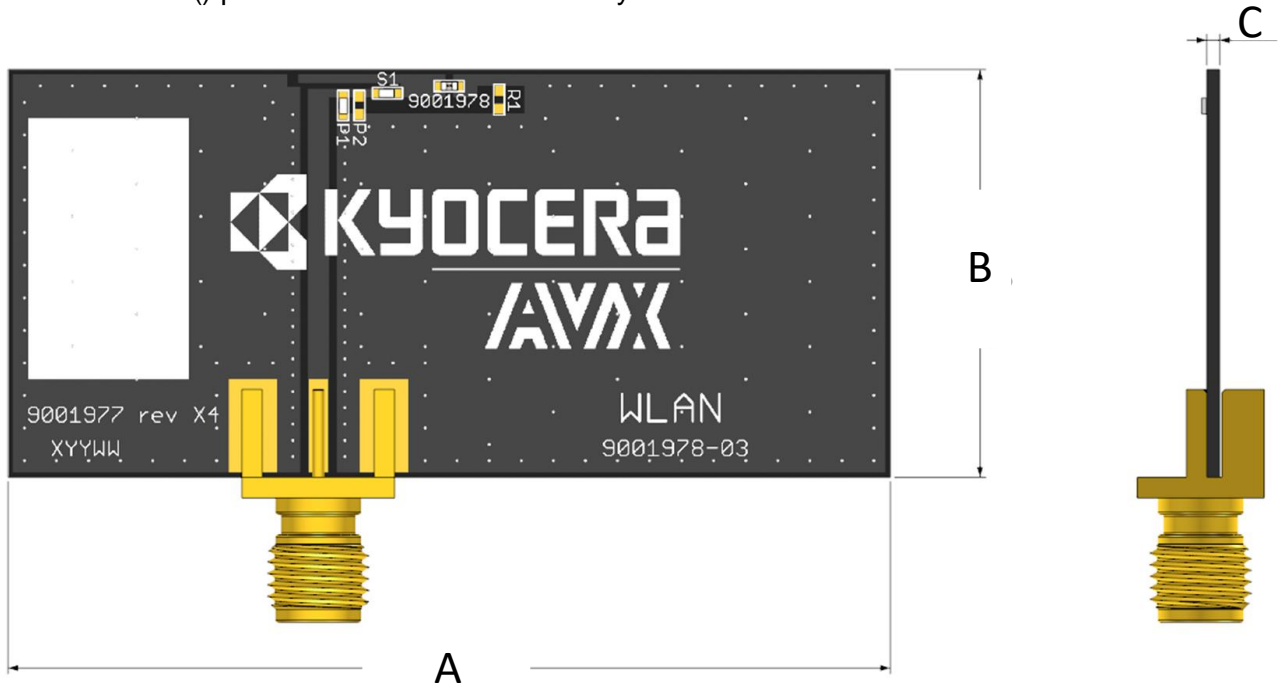

Appendix 1 BT KYOCERA AVX Embedded Chip Antenna Specifications  
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs

# Appendix 1


Appendix 1 gives instructions on how to match antenna through impedance matching network for BT (2400-2485 MHz) only.

Frequency (MHz)	2400-2485
Peak Gain (dBi)	3.45
Efficiency (%)	68
VSWR	<2.5:1
Feed Point Impedance	50 $\Omega$ unbalanced

\*Data shown above has Appendix 1 matching applied on 55 x 25 mm pcb.

Part Number	A (mm)	B (mm)
9001978-01	(55)	(25)

\*Dimensions in ( ) parenthesis are Reference Only.

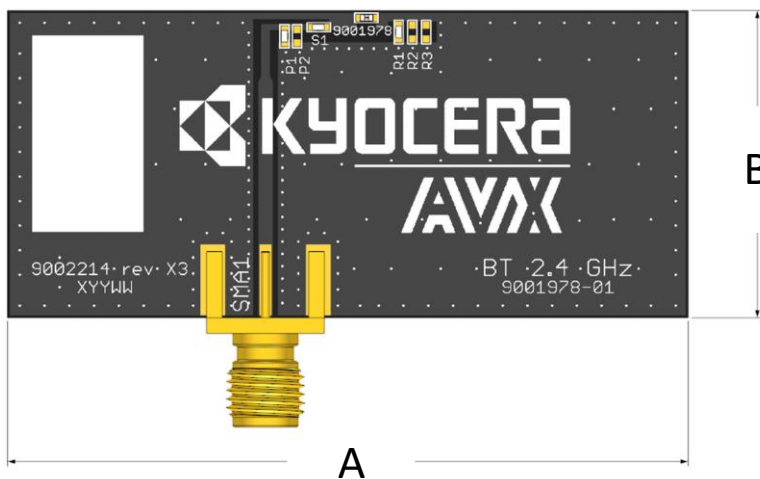




Appendix 1 BT KYOCERA AVX Embedded Chip Antenna Specifications  
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs


**VSWR, Efficiency, and Peak Gain Plots**

Typical Performance on 55 x 25 mm PCB


**VSWR**  
**(2.400 – 2.490) GHz**

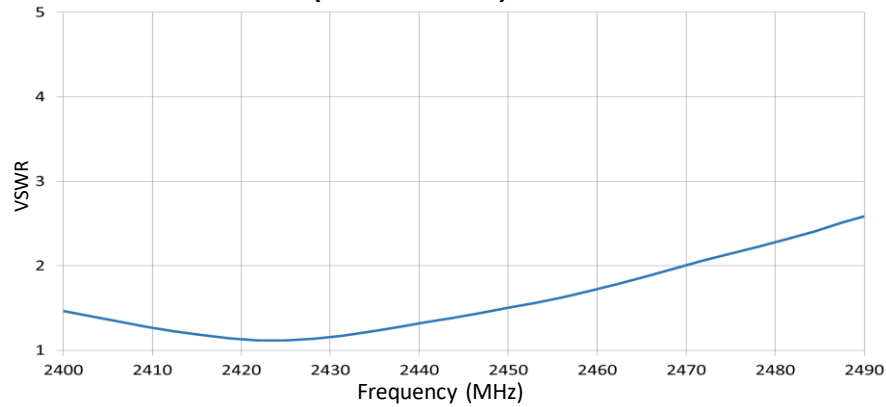

**Efficiency**  
**(2.400 – 2.490) GHz**

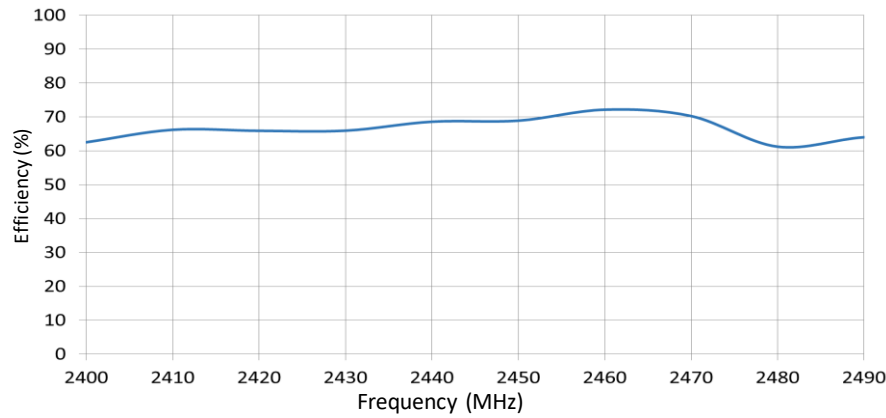




**Peak Gain**  
**(2.400 – 2.490) GHz**

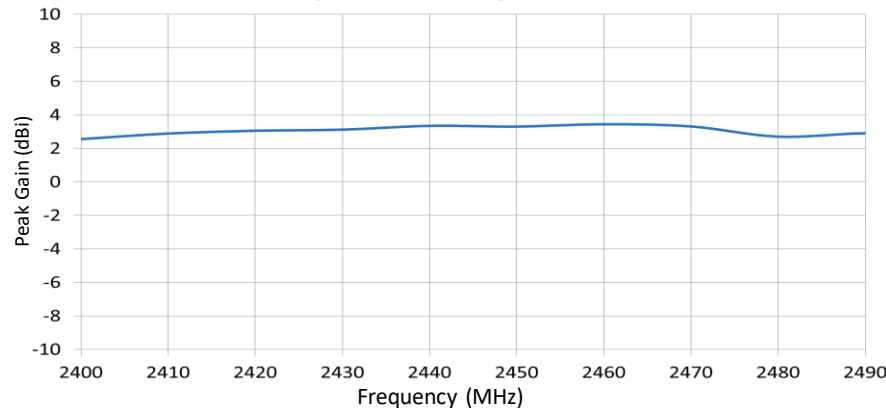

Appendix 1 BT KYOCERA AVX Embedded Chip Antenna Specifications  
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs

**Antenna Radiation Patterns**



Typical Performance on 55 x 25 mm PCB  
 Measured @ 2.440 GHz

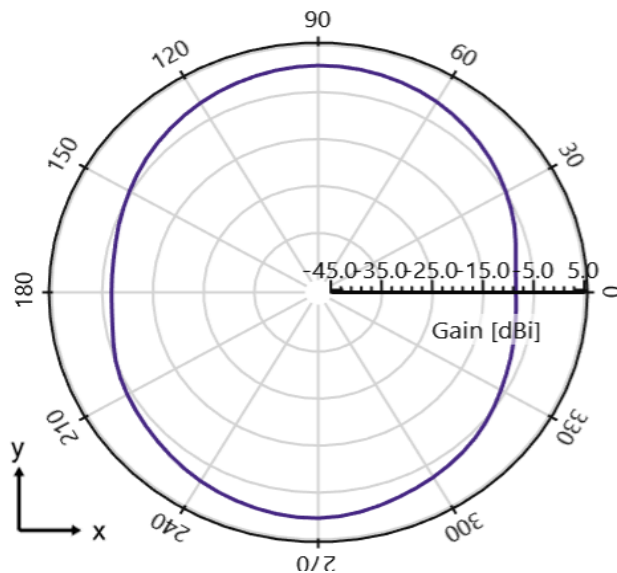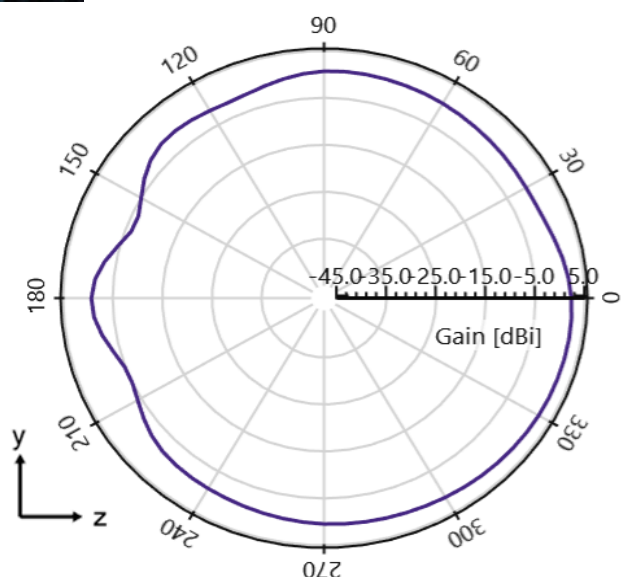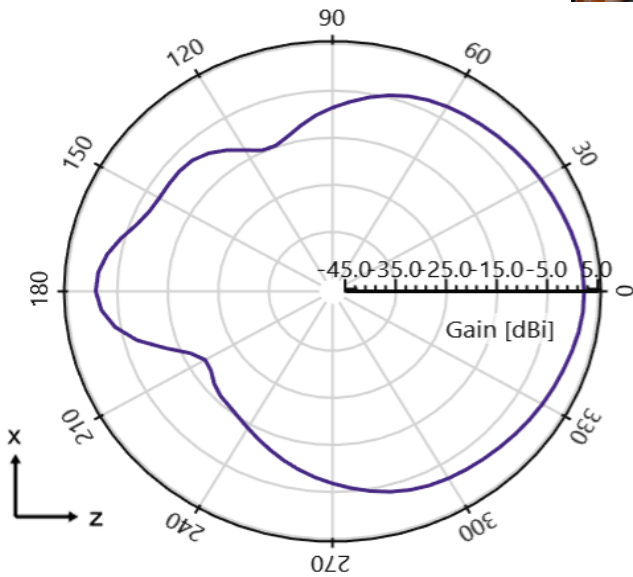

**Appendix 1 BT KYOCERA AVX Embedded Chip Antenna Specifications**  
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs

**Antenna Layout (9001978-01)**

Typical layout dimensions (mm)

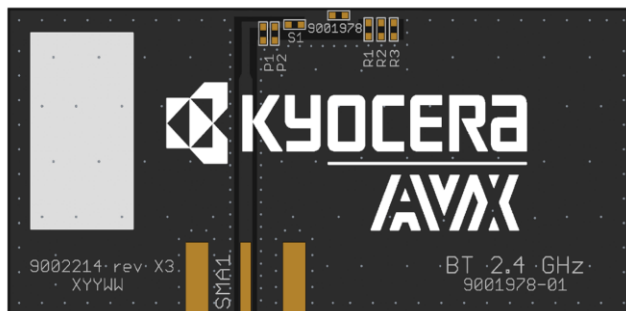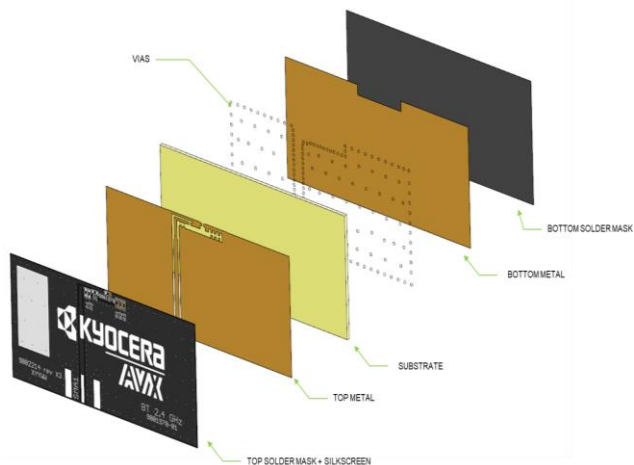

- TOP METAL WITH PLATING
- TOP SOLDER MASK

\* VIAS: Diam. 0.2mm, (no vias on transmission lines).  
 Via holes must be covered by solder mask

**Pin Description**

Pin#	Description
1	Feed
2	Ground



**Matching Pi Network (Demo Board)**

Component	Value	Tolerance
P1	4.7nH	±0.1nH
S1	0Ω	N/A
P2	N/A	N/A
R1	0Ω	N/A
R2	N/A	N/A
R3	N/A	N/A


\*Actual matching values depend on customer design



\*0Ω may be added to shift frequency higher

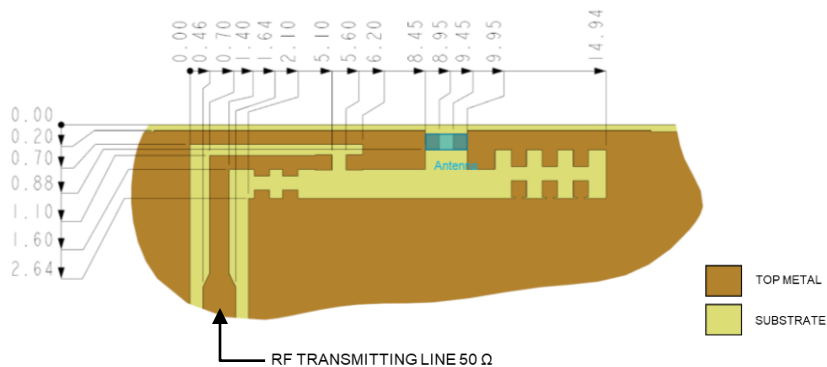

- TOP METAL
- SUBSTRATE

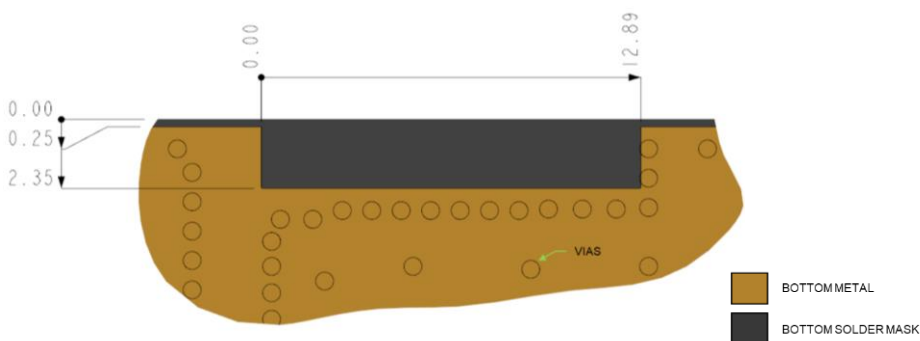

- BOTTOM METAL
- BOTTOM SOLDER MASK


Appendix 1 BT KYOCERA AVX Embedded Chip Antenna Specifications  
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs

Antenna Demo Board (9001978-01)

Typical layout dimensions (mm)

Part Number	A	B	C
9001978-01	(55.0)	(25.0)	(0.80)

\*Dimensions in () parenthesis are Reference Only.

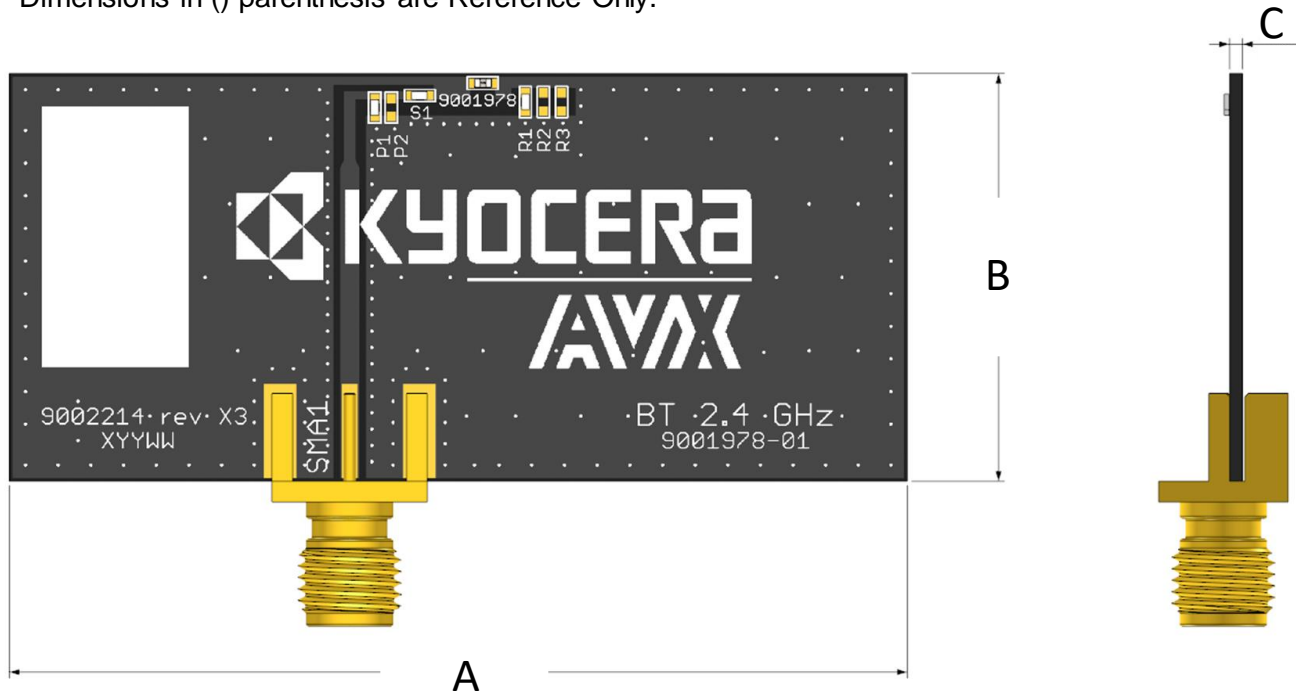

Appendix 2 UWB KYOCERA AVX Embedded Chip Antenna Specifications  
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs

# Appendix 2


Appendix 2 gives instructions on how to match antenna through updated layout and impedance matching network for UWB (6000-8500 MHz)

Frequency (MHz)	6000 - 8500
Peak Gain (dBi)	5.7
Efficiency (%)	80
VSWR	<2.6:1
Feed Point Impedance	50 Ω unbalanced

\*Data shown above has Appendix 2 matching applied on 26.5 x 25.0 mm pcb.

Part Number	A (mm)	B (mm)
9001978-04	(26.5)	(25.0)


\*Dimensions in ( ) parenthesis are Reference Only.

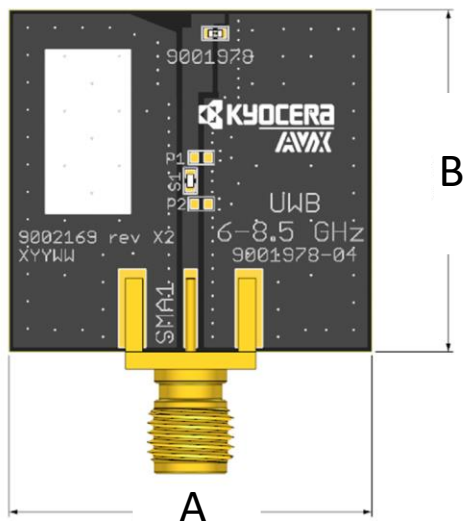

Appendix 2 UWB KYOCERA AVX Embedded Chip Antenna Specifications  
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs

**VSWR, Efficiency, and Peak Gain Plots (9001978-04)**

Typical Performance on 26.5 x 25.0 mm PCB



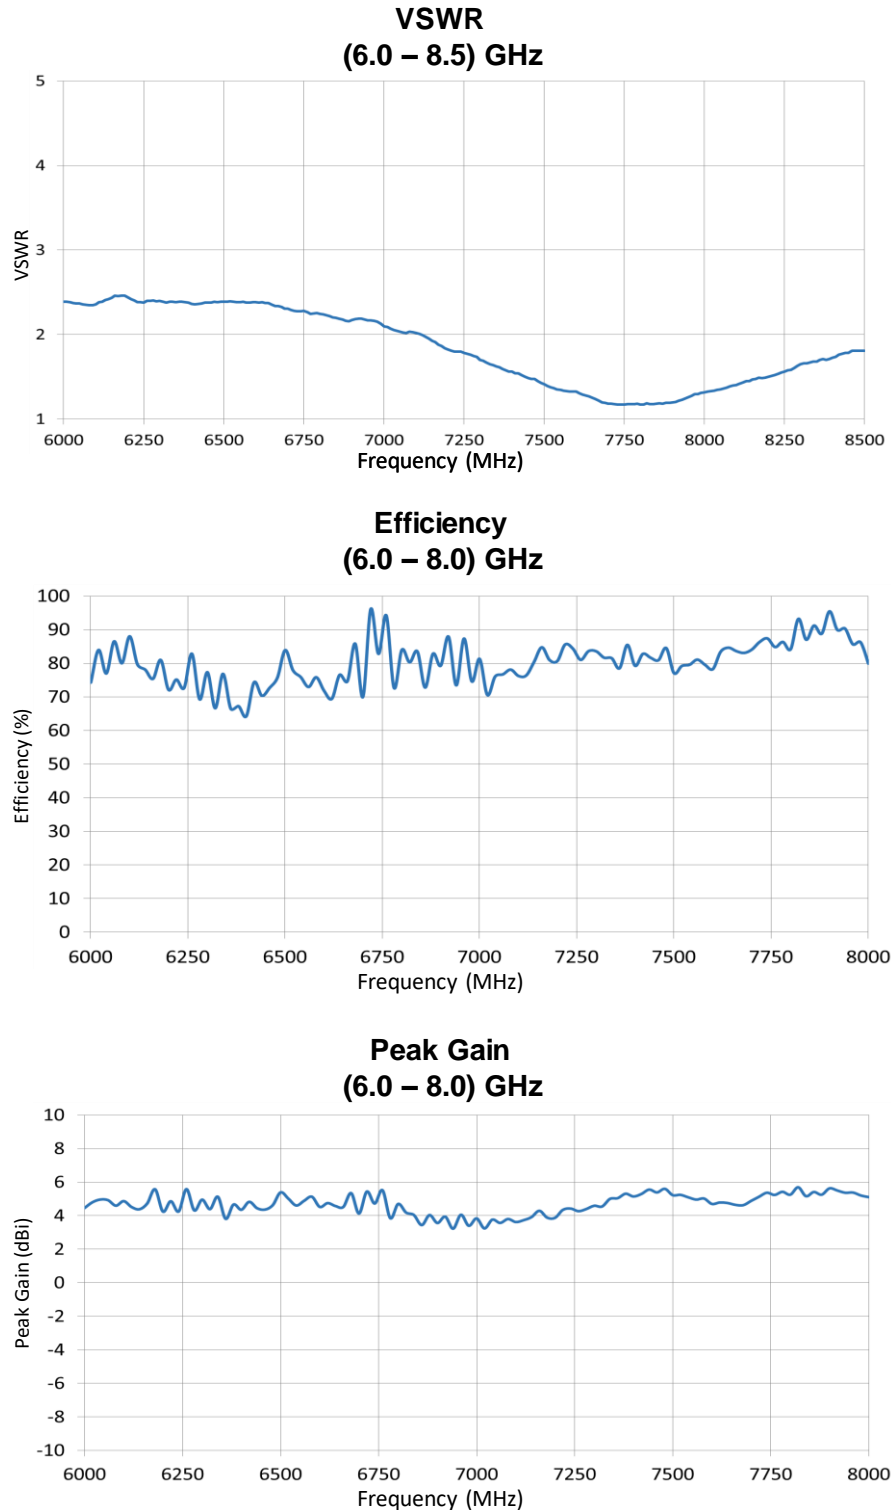


Appendix 2 UWB KYOCERA AVX Embedded Chip Antenna Specifications  
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs

**Antenna Radiation Patterns (9001978-04)**

Typical Performance on 26.5 x 25.0 mm PCB  
 Measured @ 6000, 6500, 7000, 7500, 8000 MHz



- 6000 MHz
- 6500 MHz
- 7000 MHz
- 7500 MHz
- 8000 MHz

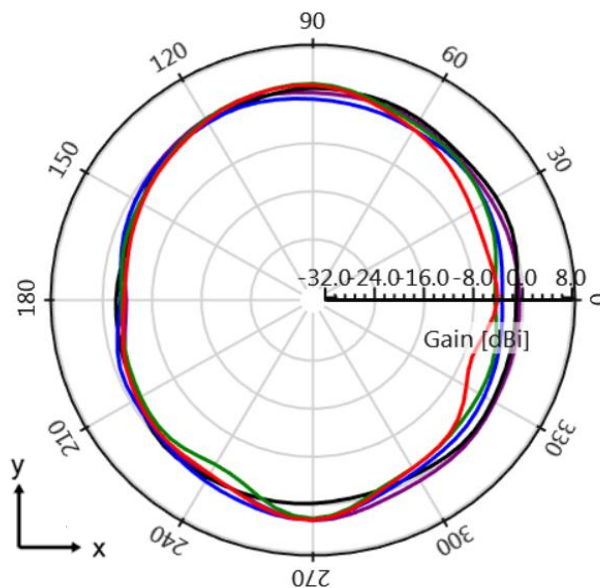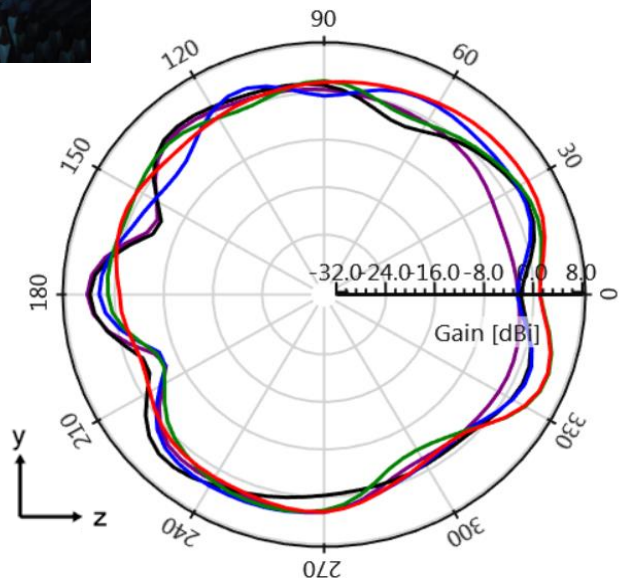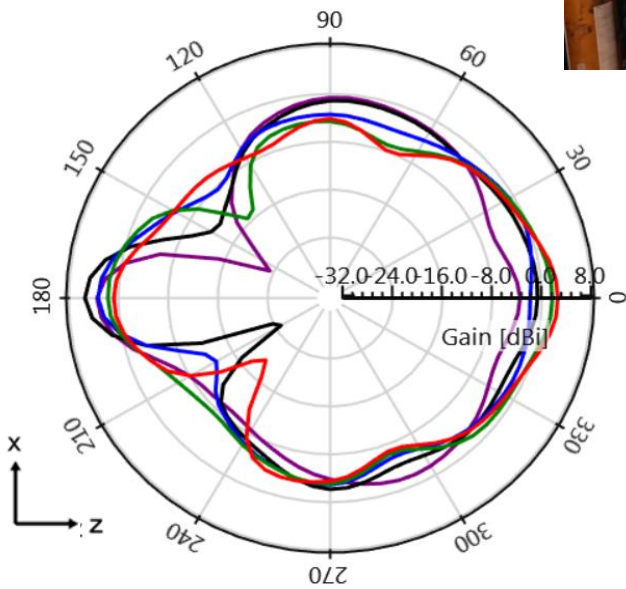


**Appendix 2 UWB KYOCERA AVX Embedded Chip Antenna Specifications**  
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs

**Antenna Layout (9001978-04)**

Typical layout dimensions (mm)

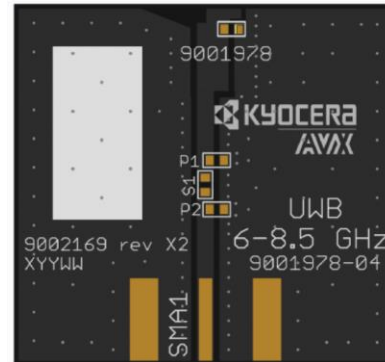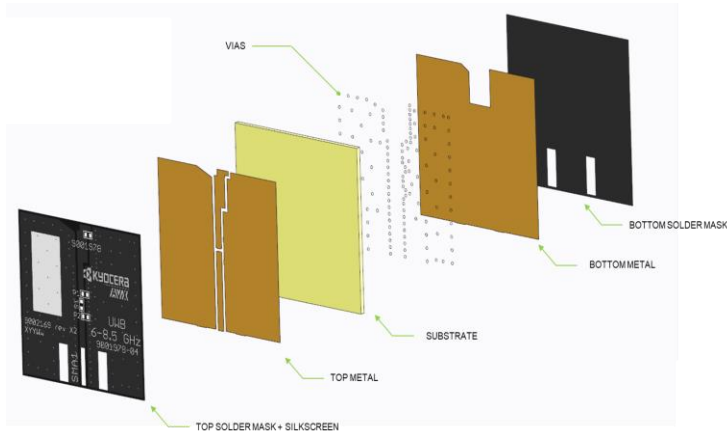

- TOP METAL WITH PLATING
- TOP SOLDER MASK

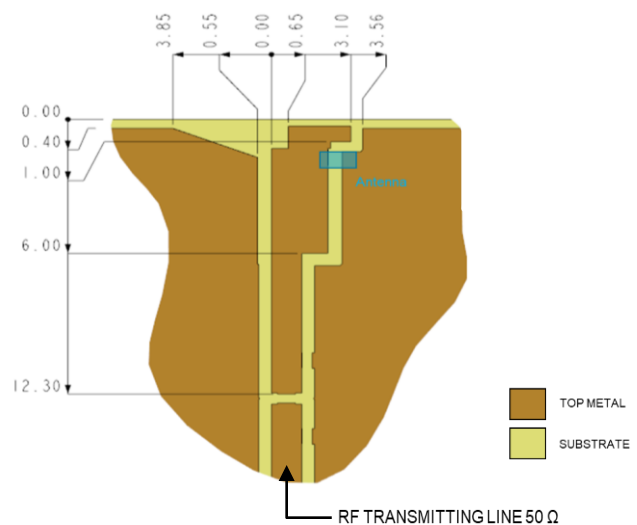

\* VIAS: Diam. 0.2mm, (no vias on transmission lines).  
 Via holes must be covered by solder mask




**Pin Description**

Pin#	Description
1	Feed
2	Ground

**Matching Pi Network (Demo Board)**

Component	Value	Tolerance
P1	DNI	N/A
S1	0Ω	N/A
P2	DNI	N/A

\*Actual matching values depend on customer design

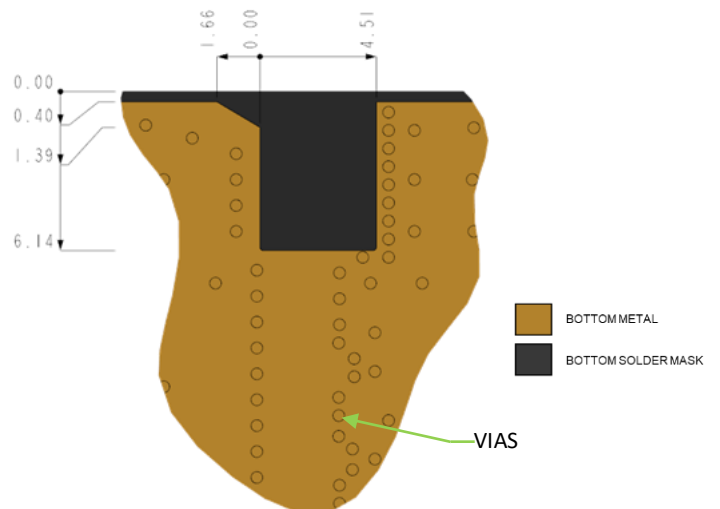




Appendix 2 UWB KYOCERA AVX Embedded Chip Antenna Specifications  
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs

**Antenna Demo Board (9001978-04)**

Typical layout dimensions (mm)

Part Number	A	B	C
9001978-04	(26.5)	(25.0)	(0.80)

\*Dimensions in () parenthesis are Reference Only.

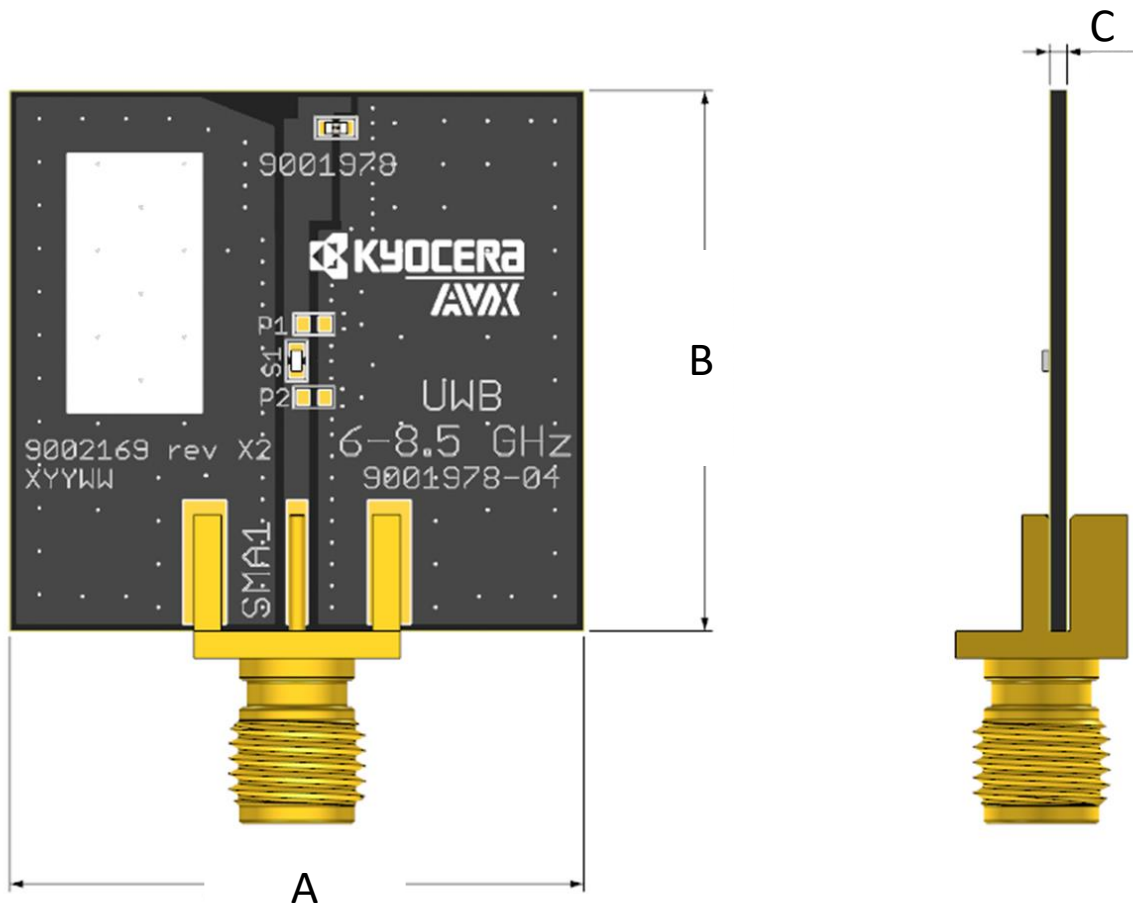

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Antenna Development Tools](#) category:*

*Click to view products by [Kyocera AVX](#) manufacturer:*

Other Similar products are found below :

[PCSD.06.A](#) [1002427-02](#) [1004796-01](#) [YC0010AAEVB](#) [1001013-02](#) [1005454-01](#) [1004795-01](#) [1002436-01](#) [ACR1004A-EVB](#) [RAC00024-EVB](#) [RAC00245-EVB](#) [ACR1004GC-EVB](#) [W3012-K](#) [W3006-K](#) [SPD.25A](#) [74889100TB](#) [A10192-U1](#) [DTAD.01.A.50](#) [SR4C033-EVB-1](#) [AEK-LTE-CER](#) [IOT-K](#) [SR4W035-EVB-1](#) [W3010-K](#) [LORA-K](#) [ISM-K](#) [REFLECTOR-EVB-1](#) [ACAG0201-2450-EVB](#) [ACAG0301-15752450-EVB](#) [ACAG0301-1575-EVB](#) [ACAG0301-24505500-EVB](#) [ACAG0301-5500-EVB](#) [ACAG0801-2450-EVB](#) [ACAG1204-433-EVB](#) [ACAG1204-868-EVB](#) [ACAG1204-915-EVB](#) [ACAR0301-SW2-EVB](#) [ACAR3005-C2WB-EVB](#) [ACAR3005-S824-EVB](#) [ACAR3705-S698-EVB](#) [ACAR4008-S698-EVB](#) [ACR0301U-EVB](#) [ACR1504I3-EVB-A](#) [ACR1504I3-EVB-S](#) [ACR2005I4-EVB](#) [ACR4006X-EVB](#) [PRO-EB-450](#) [PRO-EB-453](#) [PRO-EB-472](#) [PRO-EB-476](#) [PRO-EB-550](#)