

# SMD Aluminum Hybrid Electrolytic Capacitors

## AHA Series



### FEATURES

- Low ESR
- High Voltage, Long Life
- 105°C, 5000 to 10,000 hours
- RoHS compliant

### APPLICATIONS

- Industrial Equipment
- Base Station Equipment




LEAD-FREE  
LEAD-FREE COMPATIBLE  
COMPONENT



RoHS  
COMPLIANT



### HOW TO ORDER

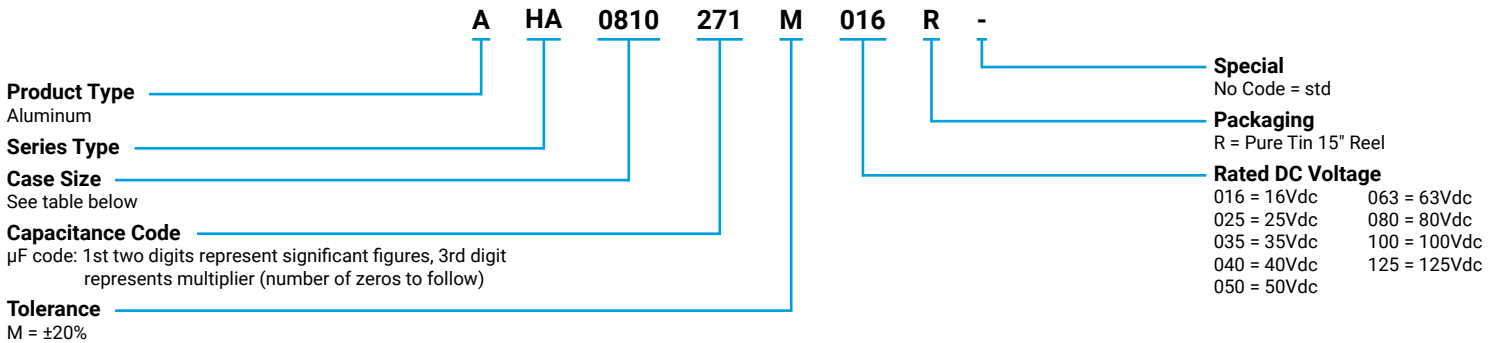

### CASE DIMENSIONS millimeters (inches)

| Code | D±0.50<br>(0.020) | L±0.50<br>(0.020) | W±0.20<br>(0.008) | H±0.20<br>(0.008) | C±0.20<br>(0.008) | R                          | P±0.30<br>(0.012) | V max           |
|------|-------------------|-------------------|-------------------|-------------------|-------------------|----------------------------|-------------------|-----------------|
| 0608 | 6.30<br>(0.248)   | 8.00<br>(0.315)   | 6.60<br>(0.260)   | 6.60<br>(0.260)   | 7.30<br>(0.287)   | 0.50-0.80<br>(0.020-0.031) | 2.00<br>(0.080)   | 0.30<br>(0.012) |
| 0810 | 8.00<br>(0.315)   | 10.50<br>(0.413)  | 8.30<br>(0.327)   | 8.30<br>(0.327)   | 9.00<br>(0.354)   | 0.70-1.10<br>(0.028-0.043) | 3.20<br>(0.126)   | 0.30<br>(0.012) |
| 1010 | 10.00<br>(0.394)  | 10.50<br>(0.413)  | 10.30<br>(0.406)  | 10.30<br>(0.406)  | 11.00<br>(0.433)  | 0.70-1.30<br>(0.028-0.051) | 4.50<br>(0.177)   | 0.30<br>(0.012) |
| 1012 | 10.00<br>(0.394)  | 12.50<br>(0.492)  | 10.30<br>(0.406)  | 10.30<br>(0.406)  | 11.00<br>(0.433)  | 0.70-1.30<br>(0.028-0.051) | 4.50<br>(0.177)   | 0.30<br>(0.012) |

### MARKING

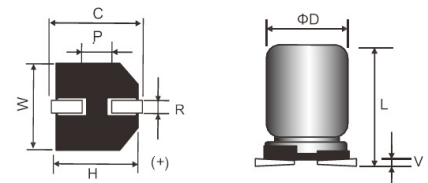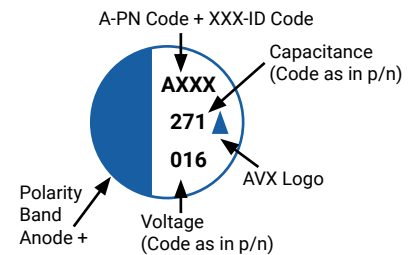

### TECHNICAL SPECIFICATIONS

|                                    |  |   |
|------------------------------------|--|---|
| <b>Category Temperature Range:</b> | -55°C to +105°C                                      |   |
| <b>Capacitance Range:</b>          | At 20°C, 120Hz                                       | 10µF to 560µF   |
| <b>Capacitance Tolerance:</b>      | At 20°C, 120Hz                                       | ±20%  |
| <b>Dissipation Factor (%)</b>      | Measurement Frequency:<br>120Hz at 20°C              | Please see the ratings and part number<br>reference table below |
| <b>Leakage Current:</b>            | After 2 minutes at rated<br>working voltage at 20°C* | $I \leq 0.01CV$ or 3µA, whichever is greater                    |

\* Note: In the case of an anomalous reading, re-measure the leakage current after following voltage treatment:  
Voltage treatment: DC rated voltage to be applied to the capacitors for 120 minutes at 105°C.

# SMD Aluminum Hybrid Electrolytic Capacitors

## AHA Series



### CAPACITANCE AND RATED VOLTAGE RANGE (FIGURES DENOTES CASE SIZE)

| Capacitance |      | Rated Voltage DC (V <sub>R</sub> ) |      |      |      |      |           |      |      |      |
|-------------|------|------------------------------------|------|------|------|------|-----------|------|------|------|
| μF          | Code | 16V                                | 25V  | 35V  | 40V  | 50V  | 63V       | 80V  | 100V | 125V |
| 10          | 100  |                                    |      |      |      |      | 0608      |      | 1010 | 1010 |
| 12          | 120  |                                    |      |      |      |      |           | 1010 | 1010 |      |
| 15          | 150  |                                    |      |      |      | 0608 |           | 1010 | 1012 |      |
| 18          | 180  |                                    |      |      |      |      |           | 1012 |      |      |
| 22          | 220  |                                    |      |      |      |      | 0810      |      |      |      |
| 27          | 270  |                                    | 0608 |      | 0608 |      |           |      |      |      |
| 33          | 330  |                                    |      |      |      | 0810 | 0810,1010 |      |      |      |
| 39          | 390  |                                    |      |      |      |      |           | 1010 |      |      |
| 47          | 470  |                                    |      | 0608 |      |      | 1010      |      |      |      |
| 56          | 560  |                                    |      |      | 0810 | 1010 | 1012      |      |      |      |
| 68          | 680  |                                    | 0608 |      |      |      |           |      |      |      |
| 82          | 820  |                                    |      |      |      | 1012 |           |      |      |      |
| 100         | 101  |                                    |      | 0810 | 1010 |      |           |      |      |      |
| 120         | 121  | 0608                               |      |      | 1012 |      |           |      |      |      |
| 150         | 151  |                                    | 0810 | 1010 |      |      |           |      |      |      |
| 220         | 221  |                                    |      | 1012 |      |      |           |      |      |      |
| 270         | 271  | 0810                               | 1010 |      |      |      |           |      |      |      |
| 330         | 331  |                                    | 1012 |      |      |      |           |      |      |      |
| 470         | 471  | 1010                               |      |      |      |      |           |      |      |      |
| 560         | 561  | 1012                               |      |      |      |      |           |      |      |      |

Released ratings

### RATINGS & PART NUMBER REFERENCE

| AVX Part No.    | Case Size | Capacitance (μF) | Rated Voltage (V) | DCL Max. (μA) | DF Max. (%) | ESR Max. @ 100kHz (mΩ) | 100kHz RMS Current (mA)/105°C |
|-----------------|-----------|------------------|-------------------|---------------|-------------|------------------------|-------------------------------|
| <b>16 Volt</b>  |           |                  |                   |               |             |                        |                               |
| AHA0608121M016R | 0608      | 120              | 16                | 19            | 16          | 40                     | 1500                          |
| AHA0810271M016R | 0810      | 270              | 16                | 43            | 16          | 26                     | 2000                          |
| AHA1010471M016R | 1010      | 470              | 16                | 75            | 16          | 21                     | 2600                          |
| AHA1012561M016R | 1012      | 560              | 16                | 90            | 16          | 15                     | 3000                          |
| <b>25 Volt</b>  |           |                  |                   |               |             |                        |                               |
| AHA0608270M025R | 0608      | 27               | 25                | 7             | 16          | 70                     | 1200                          |
| AHA0608680M025R | 0608      | 68               | 25                | 17            | 16          | 45                     | 1400                          |
| AHA0810151M025R | 0810      | 150              | 25                | 38            | 16          | 27                     | 1900                          |
| AHA1010271M025R | 1010      | 270              | 25                | 68            | 16          | 22                     | 2500                          |
| AHA1012331M025R | 1012      | 330              | 25                | 83            | 16          | 16                     | 2900                          |
| <b>35 Volt</b>  |           |                  |                   |               |             |                        |                               |
| AHA0608470M035R | 0608      | 47               | 35                | 16            | 16          | 60                     | 1300                          |
| AHA0810101M035R | 0810      | 100              | 35                | 35            | 16          | 30                     | 1800                          |
| AHA1010151M035R | 1010      | 150              | 35                | 53            | 16          | 23                     | 2400                          |
| AHA1012221M035R | 1012      | 220              | 35                | 77            | 16          | 17                     | 2800                          |
| <b>40 Volt</b>  |           |                  |                   |               |             |                        |                               |
| AHA0608270M040R | 0608      | 27               | 40                | 11            | 16          | 70                     | 1200                          |
| AHA0810560M040R | 0810      | 56               | 40                | 22            | 16          | 32                     | 1700                          |
| AHA1010101M040R | 1010      | 100              | 40                | 40            | 16          | 24                     | 2400                          |
| AHA1012121M040R | 1012      | 120              | 40                | 48            | 16          | 18                     | 2700                          |
| <b>50 Volt</b>  |           |                  |                   |               |             |                        |                               |
| AHA0608150M050R | 0608      | 15               | 50                | 8             | 16          | 80                     | 1200                          |
| AHA0810330M050R | 0810      | 33               | 50                | 17            | 16          | 35                     | 1600                          |
| AHA1010560M050R | 1010      | 56               | 50                | 28            | 16          | 25                     | 2300                          |
| AHA1012820M050R | 1012      | 82               | 50                | 41            | 16          | 19                     | 2600                          |

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5RMS with DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.



The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at [www.avx.com/disclaimer/](http://www.avx.com/disclaimer/) by reference and should be reviewed in full before placing any order.

# SMD Aluminum Hybrid Electrolytic Capacitors

## AHA Series



### RATINGS & PART NUMBER REFERENCE

| AVX Part No.    | Case Size | Capacitance (μF) | Rated Voltage (V) | DCL Max. (μA) | DF Max. (%) | ESR Max. @ 100kHz (mΩ) | 100kHz RMS Current (mA)/105°C |
|-----------------|-----------|------------------|-------------------|---------------|-------------|------------------------|-------------------------------|
| <b>63 Volt</b>  |           |                  |                   |               |             |                        |                               |
| AHA0608100M063R | 0608      | 10               | 63                | 6             | 16          | 100                    | 1000                          |
| AHA0810220M063R | 0810      | 22               | 63                | 14            | 16          | 40                     | 1500                          |
| AHA0810330M063R | 0810      | 33               | 63                | 21            | 16          | 40                     | 1500                          |
| AHA1010330M063R | 1010      | 33               | 63                | 21            | 16          | 30                     | 2100                          |
| AHA1010470M063R | 1010      | 47               | 63                | 30            | 16          | 30                     | 2100                          |
| AHA1012560M063R | 1012      | 56               | 63                | 35            | 16          | 22                     | 2400                          |
| <b>80 Volt</b>  |           |                  |                   |               |             |                        |                               |
| AHA1010120M080R | 1010      | 12               | 80                | 10            | 16          | 70                     | 1600                          |
| AHA1010150M080R | 1010      | 15               | 80                | 12            | 16          | 70                     | 1600                          |
| AHA1012180M080R | 1012      | 18               | 80                | 14            | 16          | 50                     | 1800                          |
| AHA1010390M080R | 1010      | 39               | 80                | 31            | 16          | 70                     | 1600                          |
| <b>100 Volt</b> |           |                  |                   |               |             |                        |                               |
| AHA1010100M100R | 1010      | 10               | 100               | 10            | 16          | 80                     | 1400                          |
| AHA1010120M100R | 1010      | 12               | 100               | 12            | 16          | 80                     | 1400                          |
| AHA1012150M100R | 1012      | 15               | 100               | 15            | 16          | 80                     | 1600                          |
| <b>125 Volt</b> |           |                  |                   |               |             |                        |                               |
| AHA1010100M125R | 1010      | 10               | 125               | 13            | 16          | 90                     | 1200                          |

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5RMS with DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

### FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

| Capacitance Range | 100Hz ≤ F(Hz) < 1K | 1K ≤ F(Hz) < 10K | 10K ≤ F(Hz) < 100K | 100K(Hz) ≤ F |
|-------------------|--------------------|------------------|--------------------|--------------|
| 4.7 < C ≤ 33      | 0.05               | 0.32             | 0.67               | 1.00         |
| 33 < C            | 0.10               | 0.35             | 0.70               | 1.00         |

### QUALIFICATION TABLE

| Test                            | AHA series (Temperature range -55°C to +105°C)   |                           |                                       |
|---------------------------------|--|---------------------------|---------------------------------------|
|                                 | Condition  | Characteristics           |                                       |
| <b>Endurance</b>                | The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 5000 to 10,000 hours at 105°C.<br>Φ6.3 = 5000hrs, D≥ Φ8 = 10,000hrs                        | <b>Visual examination</b> | no visible damage                     |
|                                 |  | <b>ΔC/C</b>               | ≦ ±30% of the initial limit           |
|                                 |  | <b>DF</b>                 | ≦ 200% of the initial specified limit |
|                                 |  | <b>ESR</b>                | ≦ 200% of the initial specified limit |
|                                 |  | <b>DCL</b>                | ≦ Initial specified limit or less     |
| <b>Damp Heat (Steady State)</b> | The following specifications shall be satisfied when the capacitors are restored to 20°C after subjection them to store at 60°C, 90 to 95% RH for 1000 hours, without DC applied.  | <b>Visual examination</b> | no visible damage                     |
|                                 |  | <b>ΔC/C</b>               | ≦ ±30% of the initial limit           |
|                                 |  | <b>DF</b>                 | ≦ 200% of the initial specified limit |
|                                 |  | <b>ESR</b>                | ≦ 200% of the initial specified limit |
|                                 |  | <b>DCL</b>                | ≦ Initial specified limit or less     |
| <b>Surge Voltage</b>            | The capacitors shall be subjected to 1000 cycles each consisting of charge with the surge voltages specified at 15-35°C for 30 seconds.<br>Through a protective resistor (R = 1kΩ) and discharge for 5 minutes 30 seconds. | <b>Visual examination</b> | no visible damage                     |
|                                 |  | <b>ΔC/C</b>               | ≦ ±30% of the initial limit           |
|                                 |  | <b>DF</b>                 | ≦ 200% of the initial specified limit |
|                                 |  | <b>ESR</b>                | ≦ 200% of the initial specified limit |
|                                 |  | <b>DCL</b>                | ≦ Initial specified limit or less     |

# SMD Aluminum Hybrid Electrolytic Capacitors

## AHA Series

### STORAGE


- It is recommended to keep capacitors between the ambient temperatures of 5°C to 35°C and a relative humidity of 75% or below.
- Confirm that the environment does not have any of the following conditions:
  - Damp conditions such as water, saltwater spray, or oil spray or fumes. High humidity or humidity condensation situations.
  - In an atmosphere filled with toxic gasses (such as hydrogen sulfide, sulfurous acid, nitrous acid, chlorine, ammonia, etc.).
  - Being exposed to direct sunlight, ozone, ultraviolet ray, or radiation.
  - Being exposed to acidic or alkaline solutions.
  - Under severe conditions where vibration and / or mechanical shock exceed the applicable ranges of the specification.
- 

| Category         | Description    | Storage Life  |
|------------------|----------------|---|
| Mid-High Voltage | 160V and above | 2yrs, after 1yr, needs to check characteristics, if NG, needs to do aging |
| Low Voltage      | 120V and below | 2yrs  |


Remark: Re-aging condition depends on its own spec.

### PACKAGE TAPE DIMENSIONS units (mm)


| Size Code | A±0.20 | B±0.20 | W±0.30 | F±0.10 | E±0.10 | P±0.10 | t±0.10 | T±0.20    |
|-----------|--------|--------|--------|--------|--------|--------|--------|-----------|
| 0608      | 7.0    | 7.0    | 16.0   | 7.5    | 1.75   | 12.0   | 0.4    | 8.0       |
| 0810      | 8.7    | 8.7    | 24.0   | 11.5   | 1.75   | 16.0   | 0.4    | 11.0      |
| 1010      | 10.7   | 10.7   | 24.0   | 11.5   | 1.75   | 16.0   | 0.4    | 11.0      |
| 1012      | 10.7   | 10.7   | 24.0   | 11.5   | 1.75   | 16.0   | 0.4    | 13.0-13.5 |

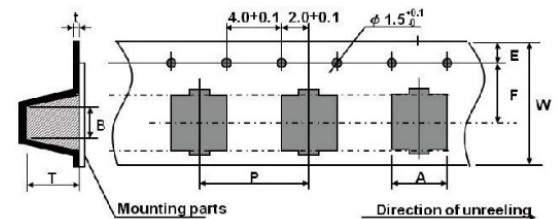

### REEL

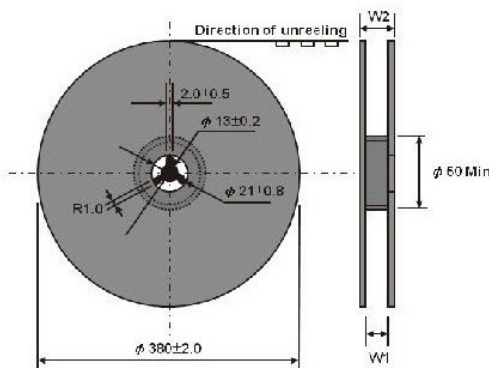

### POLARITY

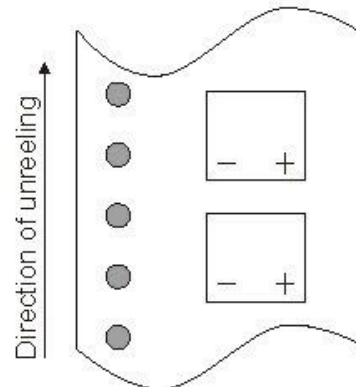

### DIMENSIONS units (mm)

| Size Code | W1±1.00 | W2±1.00 | Qty./Reel |
|-----------|---------|---------|-----------|
| 0608      | 18.0    | 22.0    | 1000      |
| 0810      | 26.0    | 31.0    | 500       |
| 1010      | 26.0    | 31.0    | 500       |
| 1012      | 26.0    | 31.0    | 400       |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Aluminium Electrolytic Capacitors - SMD category](#):*

*Click to view products by [Kyocera AVX manufacturer](#):*

Other Similar products are found below :

[EEV-FK1E332W](#) [22927](#) [MAL214099813E3](#) [HUB1800-S](#) [HUB470-P](#) [34610](#) [RYK-50V101MG5TT-FL](#) [107AXZ016MQ5](#)  
[EMK1EM471GB0D00R](#) [RVT2A4R7M0605](#) [MAL214097402E3](#) [MAL224699909E3](#) [MAL224699813E3](#) [MAL215099017E3](#)  
[MAL215099117E3](#) [MAL215099818E3](#) [AEH1010471M010R](#) [AEA0810101M035R](#) [AEA1010681M016R](#) [AEA1010471M025R](#)  
[AEA0810331M010R](#) [AEA1616102M050R](#) [AEH1010101M050R](#) [AEH0810470M050R](#) [AEA0810220M100R](#) [AEA0810151M035R](#)  
[AEA0810331M016R](#) [AEA0810470M063R](#) [AEA1213471M035R](#) [AEH0608220M050R](#) [AEH0608330M050R](#) [AEH0608470M025R](#)  
[AEH0608470M035R](#) [AEH0810101M025R](#) [AEH1012101M063R](#) [GSC00AB2201AARL](#) [GSC00AB2R21HARL](#) [GSC00AB2R21JARL](#)  
[GSC00AB3R31HARL](#) [GSC00AC2201EARL](#) [GSC00AC3301AARL](#) [GSC00AC3301CARL](#) [GSC00AC3R31JARL](#) [GSC00AC4R71HARL](#)  
[GSC00AD2201HARL](#) [GSC00AD2201VARL](#) [GSC00AD3301VARL](#) [GSC00AD4701CARL](#) [GSC00AD4R71JARL](#) [GSC00AE1001JARL](#)