




2.5×2.0mm for Mobile Communications/ Automotive

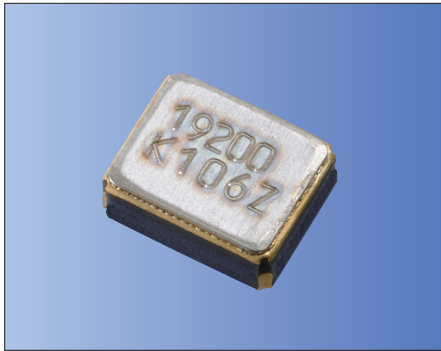

AEC-Q200

RoHS Compliant

Features

- Reference frequency for telecommunication systems
- Reflow compatible
- Using ceramic package resulting in high reliability

Applications

- Mobile Communications, Bluetooth®, Wireless LAN, GNSS
- Car navigation system
- Car audio system

* Bluetooth® Trademarks are owned by Bluetooth SIG, Inc.

How to Order

CT2520DB 19200 □□ □ □ □ □
① ② ③ ④ ⑤ ⑥ ⑦

①Series						
②Frequency						
③Load Capacitance				④Frequency Tolerance		
B0	6 pF	—	F	$\pm 10 \times 10^{-6}$	Std.	
C0	7 pF	Std.	G	$\pm 15 \times 10^{-6}$	—	
⑤Operating Temp. Range				⑥Frequency Temp. Stability		
FF	-20 to +70°C		$\pm 10 \times 10^{-6}$			
LH	-30 to +85°C		$\pm 12 \times 10^{-6}$			
LJ	-30 to +85°C		$\pm 15 \times 10^{-6}$			

⑦Individual Specification

Packaging (Tape & Reel 12000 pcs./ reel)

Specifications

Item	Symbol	Specification	Unit	Remarks
Frequency Range	f _{nom}	19200/ 26000	kHz	
Overtone Order	OT	Fundamental	—	
Load Capacitance	CL	7	pF	
Frequency Tolerance	f _{tol}	± 10	$\times 10^{-6}$	30°C ± 3 °C
Motional Series Resistance	R1	Table 1	ohm	
Drive Level	DL	10	μ W	100 μ W max.
Operating Temp. Range	T _{use}	-30 to +85	°C	
Storage Temp. Range	T _{stg}	-40 to +105	°C	
Frequency Temp. Characteristics	f _{tem}	± 12	$\times 10^{-6}$	Freq. deviation from the value at 30°C
Thermistor Resistance	—	Table 2	ohm	25°C
Thermistor B-Constant	—	Table 3	K	25°C to 50°C

Please contact us for other specifications.

Table 1 Motional Series Resistance

Frequency Range	Motional Series Resistance
19200kHz	80 Ω max.
26000kHz	60 Ω max.

Table 2 Thermistor Resistance

Resistance	Specification
100k Ω	$\pm 1\%$

Table 3 Thermistor B-Constant


B-Constant	Specification
4250K	$\pm 1\%$

Crystal Units




Dimensions

(Unit: mm)

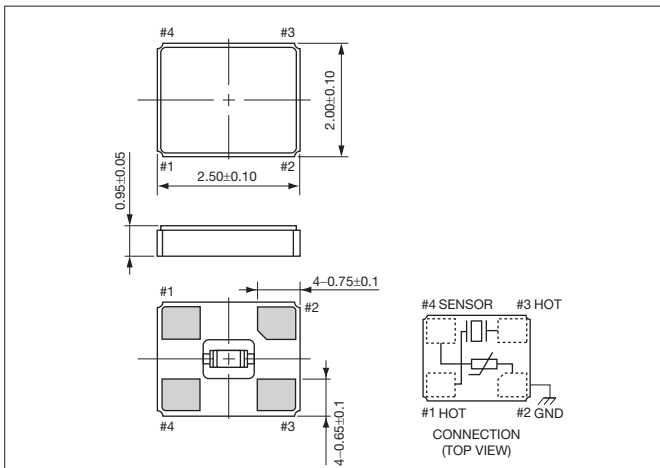

Recommended Land Pattern

(Unit: mm)

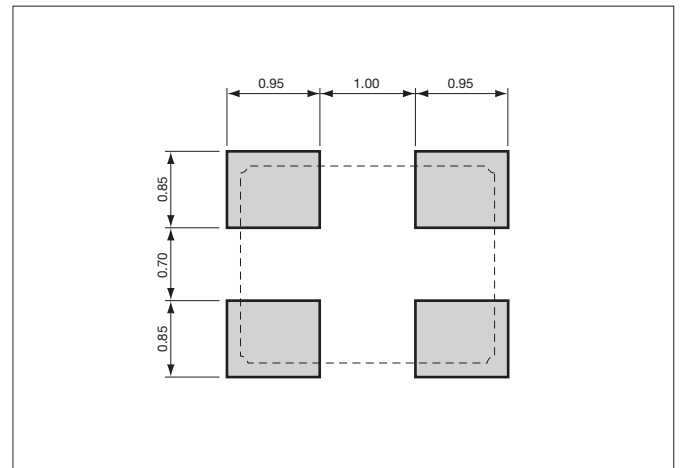

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Crystals](#) category:

Click to view products by [Kyocera AVX](#) manufacturer:

Other Similar products are found below :

[MC405 32.0000K-R3:PURE SN](#) [7B-27.000MBBK-T](#) [MP1-8.0 99-BU](#) [9B-15.360MBBK-B](#) [PTX-A2JM-10.000M](#) [9C-7.680MBBK-T](#) [H10S-12.000-18-EXT-TR](#) [R38-32.768-12.5-5PPM-NPB](#) [BTD1062E05A-513](#) [21U15A-21.4MHZ](#) [RTX-781DF1-S-20.950](#) [LFXTAL066198Cutt](#) [9C-14.31818MBBK-T](#) [A-11.000MHZ-27](#) [SPT2A-.032768B](#) [SPT2A.032768G](#) [SSPT7F-9PF20-R](#) [FX325BS-38.88EEM1201](#) [MP-1-25.000MHZ-3L](#) [MP-1-6.000MHZ](#) [LFXTAL065253Cutt](#) [LFXTAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [646G-24-2](#) [7A-24.576MBBK-T](#) [7B-30.000MBBK-T](#) [7A-14.31818MBBK-T](#) [6526-202-1501](#) [BTJ120E02C](#) [SG636PCE-20.000MC](#) [3404](#) [CM315D32768EZFT](#) [C1E-24.000-7-2020-R](#) [C1E-19.200-12-1530-X-R](#) [C1E-16.000-12-1530-X-R](#) [ABM11-16.000MHZ-9-B1U-T](#) [FL5000014](#) [EUCA18-3.1872M](#) [425F35E027M0000](#) [17196](#) [ABM3-13.52313MHZ-10-B4Y-T](#) [MS3V-T1R-32.768kHz-7pF-20PPM-TA-QC-Au](#) [VXM7-1C1-16M000](#) [MS1V-T1K-32.768kHz-10pF-20PPM-TA-QC-Au](#) [MS3V-T1R-32.768kHz-9pF-20PPM-TA-QC-Au](#) [ECS-80-18-30-JGN-TR](#) [17000](#) [17301](#)