


Medium Power Film Capacitors



FD (RoHS Compliant)

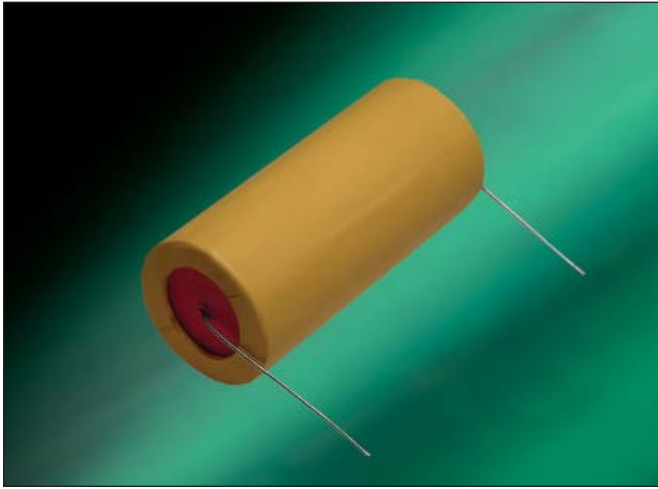

GENERAL DESCRIPTION

FD series use metallized dielectric, controlled self-healing technology, high specific energy.

USUAL APPLICATIONS

The FD capacitors are designed for discharge applications such as Laser, electronic flash, cardiac defibrillator, etc.

FD series offer a very high specific energy level, higher than 1500J per liter for cardiac defibrillator application.

PACKAGING MATERIAL

Cylindrical with thermosetting sleeve, sealed with polyurethane resin.

HOT SPOT CALCULATION


See *Hot Spot Temperature* page 3.

For all applications the temperature in the hot spot capacitor must be lower than 85°C

$$\theta_{\text{hot spot}} = \theta_{\text{ambient}} + (tg\delta_0 \times Q + R_s I_{\text{rms}}^2) \times R_{\text{th}}$$

with $tg\delta_0 = 2 \cdot 10^{-4}$
 Q in Vars
 R_s in Ohm
 I_{rms} in Ampere
 R_{th} in °C/W

DIMENSIONS

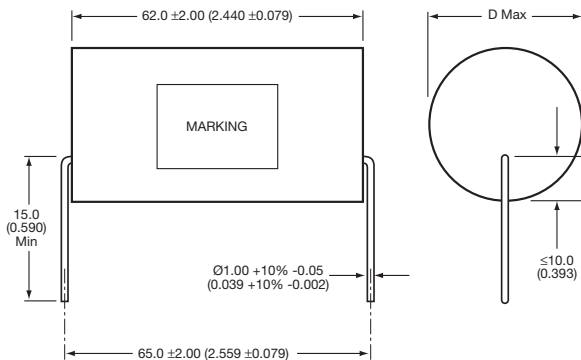

DISCHARGE

HOW TO ORDER

FD	V1	6	L	0806	K	--
Series	Style	Dielectric 6 = Polypropylene	Voltage Code L = 1000V Q = 1400V S = 1700V	Capacitance Code 0 + pF code 0806 = 80µF 0206 = 20µF 0505 = 5.0µF etc.	Capacitance Tolerances K = ±10%	Terminal Code -- = Standard



Medium Power Film Capacitors



FD (RoHS Compliant)

ELECTRICAL CHARACTERISTICS


Operating temperature:	-55°C to +85°C
Storage temperature:	-55°C to +85°C
Capacitance range:	5µF to 80µF other values on request
Capacitance tolerance:	±10%
Nominal charging voltage:	1kV to 1.7kV higher voltage on request
Test voltage between terminals:	@ 25°C: 1.2 x U _{Ndc} during 10s
Test voltage between terminals and earth:	@ 25°C: 2 U _{Ndc} during 1 min (type test)
Dielectric	Polypropylene

RATINGS AND PART NUMBER REFERENCE

Part Number	Capacitance (µF)	Max diameter mm (in)	I peak max (A)	Irms max (A)	R _s (mΩ)	R _{th} (°C/W)	Typical Weight (g)
U_{ch} = 1000V (Voltage Code L)							
FDV16L0806K--	80	50 (1.969)	2500	12	6	15.9	170
FDV16L0606K--	60	44 (1.732)	2000	12	7.7	17.5	135
FDV16L0406K--	40	37 (1.457)	1300	10	11	18.2	95
FDV16L0206K--	20	28 (1.102)	650	5	21.1	17.3	55
U_{ch} = 1400V (Voltage Code Q)							
FDV16Q0506K--	50	51 (2.008)	2100	12	7.1	16	170
FDV16Q0306K--	30	41 (1.614)	1250	11.5	11.2	17.3	135
FDV16Q0206K--	20	35 (1.378)	800	7.5	16.3	18.4	95
FDV16Q0106K--	10	27 (1.063)	400	3.5	31.5	17.3	55
U_{ch} = 1700V (Voltage Code S)							
FDV16S0356K--	35	51 (2.008)	1750	12	8.3	16	170
FDV16S0256K--	25	44 (1.732)	1250	12	11	17.2	135
FDV16S0156K--	15	35 (1.378)	750	7.5	18	18.5	95
FDV16S0505K--	5	24 (0.945)	250	2.5	51.9	15.9	55

DISCHARGE

LIFETIME EXPECTANCY vs VOLTAGE AND HOT SPOT TEMPERATURE

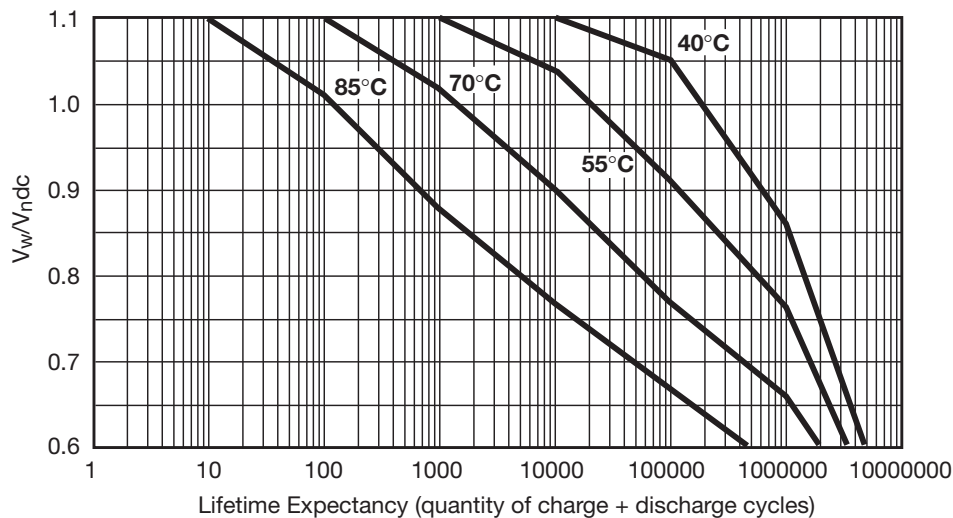

V_w : operating or working charge voltage



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Film Capacitors](#) category:

Click to view products by [Kyocera AVX](#) manufacturer:

Other Similar products are found below :

[F450KG153J250ALH0J](#) [750-1018](#) [FKP1-1000160010P15](#) [FKP1-1500160010P15](#) [82EC1100DQ50K](#) [MMWAF150KME](#)
[PFR5101J100J11L16.5TA18](#) [PME261JB5220KR19T0](#) [A521HH333M035C](#) [QXJ2E474KTPT](#) [QXL2B333KTPT](#) [QXM2G104K](#) [DMT2P22](#)
[EEC2G505HQA406](#) [B32520C6332K000](#) [B32522C6104K000](#) [B32523Q3155J](#) [B32676E6755K](#) [C3B2AD44400B20K](#) [SCD105K122A3-22](#)
[2N3155](#) [F601BL225K063CL60A](#) [FKP1-2202KV5P15](#) [FKS3-680040010P10](#) [445450-1](#) [B32523Q0475K000](#) [46KR415050M1K](#)
[4BSNBX4100ZBFJ](#) [4DCNAQ4450ZA0J](#) [MKP383510063JKP2T0](#) [MKT 1813-368-015](#) [MKT182022263473](#) [4055292001](#) [WMC08P22](#)
[WMF1S15](#) [WMF4S68](#) [EEC2E106HQA405](#) [EEC2G805HQA415](#) [82DC3100DQ50J](#) [82EC2150DQ50K](#) [WMF4D68](#) [WMF1D68](#)
[B25620B118K883](#) [B25620B158K883](#) [A521HH471M450C](#) [97F8038](#) [NRM-S225K250F](#) [730P205X9400](#) [P42DB8483AA00F](#)
[82DC3220AA60J](#)