

High Temperature +175°C Automotive Series

+175°C Rated Varistors



GENERAL DESCRIPTION

AVX High Temperature 175°C Multi-Layer Varistors are designed for underhood and other high temperature automotive or industrial applications. Parts are AEC-Q200 qualified.

They offer bi-directional overvoltage protection as well as EMI/RFI attenuation in a single SMT package. This allows designers the ability to combine the circuit protection and EMI/RFI attenuation function into a single highly reliable device.

Products have been tested, qualified, and specified to 175°C and they do not require any derating over specified operating temperature range.

GENERAL CHARACTERISTICS

- Operating Temp.: -55 to +175°C
- Working Voltage: 18, 31Vdc
- Case Size: 0603, 0805

FEATURES

- +175°C rated, with no derating
- High Reliability
- AEC Q200 Qualified
- Bi-Directional protection
- EMI/RFI attenuation
- ESD rated to 25kV (HBM ESD Level 6)

APPLICATIONS

- Under hood
- Down Hole Drilling
- High temperature Automotive and Industrial Applications

HOW TO ORDER

VT	A7	0603	18	A	400	R	P
Varistor Temp Rated	Automotive 175°C	Case Size 0603 0805	Working Voltage 18 = 18Vdc 31 = 31Vdc	Energy Rating A=0.1J C=0.3J	Clamping Voltage 400 = 42V 650 = 65V 670 = 67V	Package D = 7" (1,000) R = 7" (4,000) T = 13" (10,000)	Termination P = Ni/Sn plated



ELECTRICAL CHARACTERISTICS

AVX PN	V _W (DC)	V _W (AC)	V _B	V _C	I _{VC}	I _L	E _T	E _{LD}	I _P	Cap	V _{Jump}	P _{Diss. Max}
	Vdc	Vac	V	V	A	µA	J	J	A	pF	V	W
VTA7060318A400	18	13	23±10%	42	1	10	0.1	0.25	30	275	27.5	0.003
VTA7080518C400	18	13	25.5±10%	42	1	10	0.3	1	120	450	27.5	0.007
VTA7060331A670	31	25	39±10%	67	1	10	0.1	0.25	30	90	29	0.005
VTA7080531C650	31	25	39±10%	65	1	10	0.3	1	80	275	29	0.005


V_W(DC) DC Working Voltage [V]
 V_W(AC) AC Working Voltage [V]
 V_B Typical Breakdown Voltage [V @1mA_{DC}]
 V_C Clamping Voltage [V @I_C]
 I_{VC} Test Current for V_C
 I_L Maximum leakage current at the working voltage [µA]

E_T Transient Energy Rating [J, 10x1000µS]
 E_{LD} Load Dump Energy (x10)
 I_P Peak Current Rating [A, 8x20µS]
 Cap Typical capacitance [pF] @frequency specified and 0.5V_{RMS}
 V_{Jump} Jump Start (V)
 P_{Diss. Max} Power Dissipation (W)

DIMENSIONS

mm(inches)


Size (EIA)	Length (L)	Width (W)	Max Thickness (T)	Land Length (t)
0603	1.60±0.15 (0.063±0.006)	0.80±0.15 (0.031±0.006)	0.90 (0.035)	0.35±0.15 (0.014±0.006)
0805	2.01±0.20 (0.079±0.008)	1.25±0.20 (0.049±0.008)	1.02 (0.040)	0.71 max. (0.028 max.)

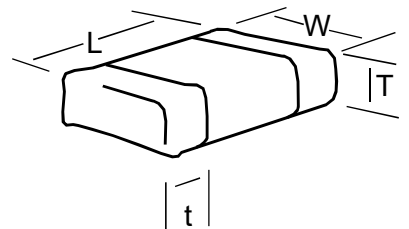


High Temperature +175°C Automotive Series

+175°C Rated Varistors

POWER DERATING CURVE (CURRENT, ENERGY, POWER)

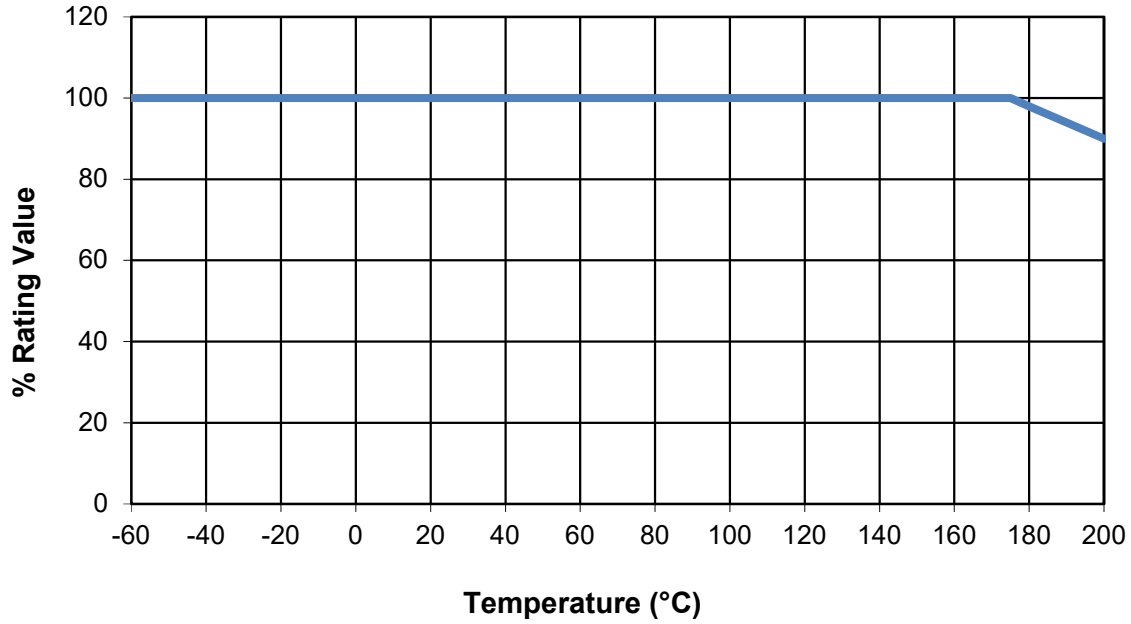

CAPACITANCE VS TEMPERATURE

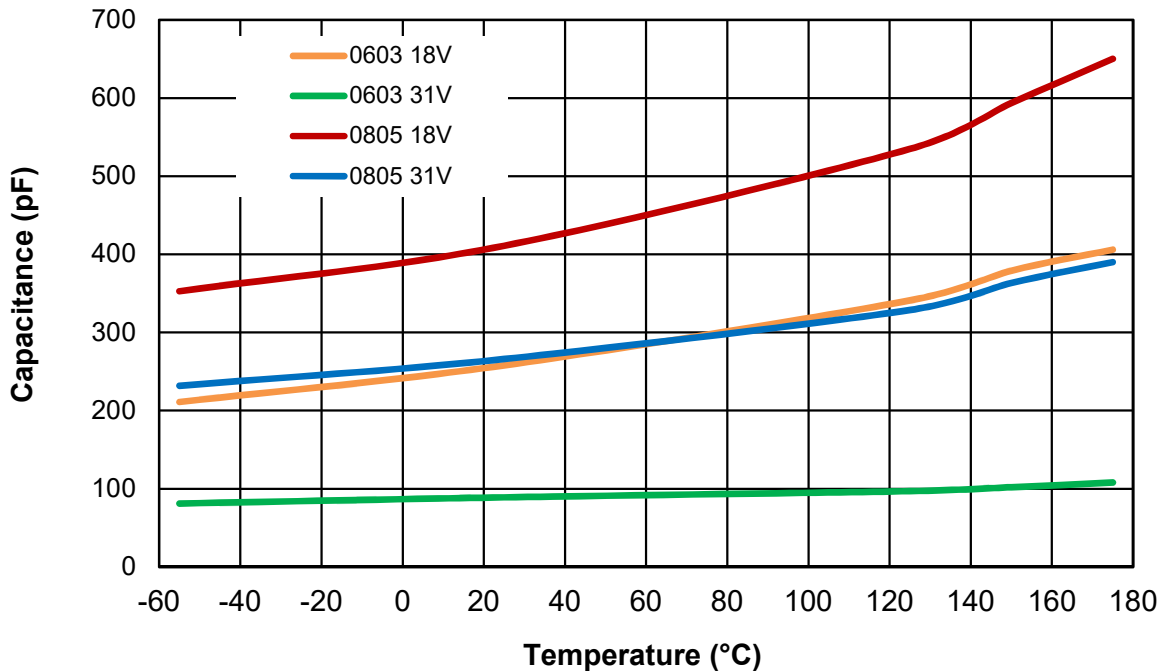


High Temperature +175°C Automotive Series


+175°C Rated Varistors

V-I CHARACTERISTICS


VTA7060318A400

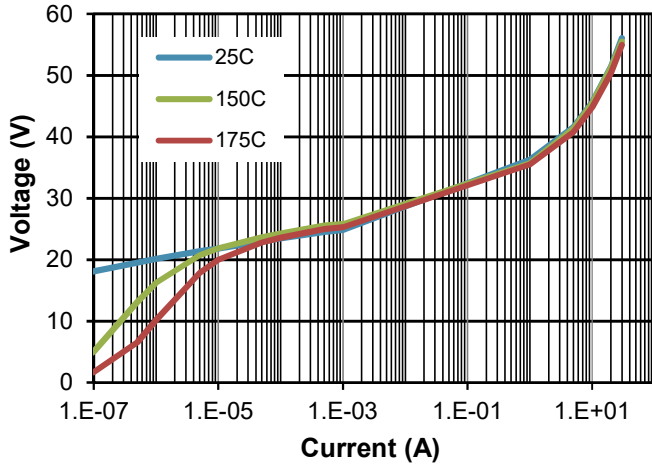


VTA7060331A650

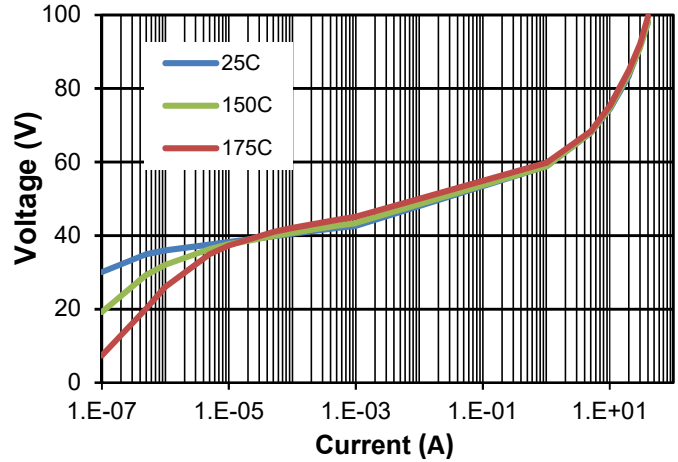

VTA7080518C400

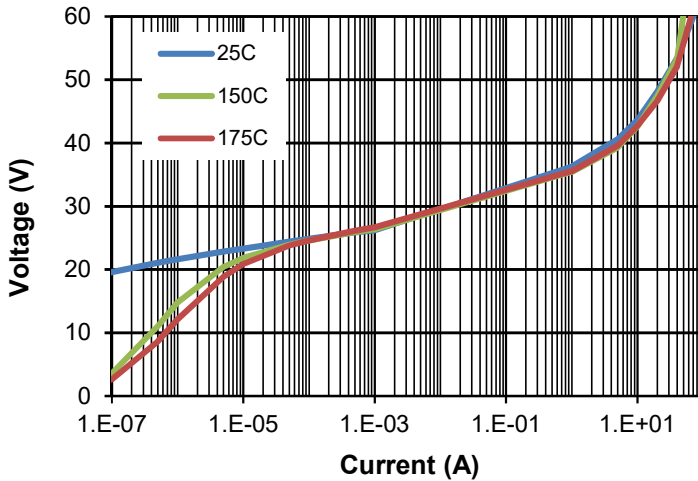


VTA7080531C650

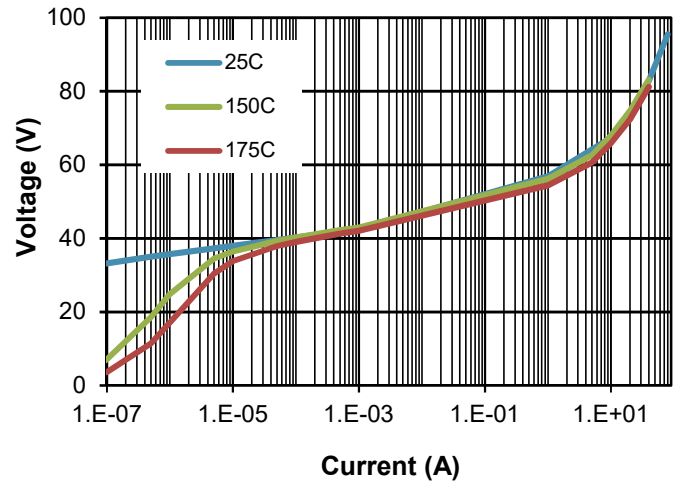

High Temperature +175°C Automotive Series

+175°C Rated Varistors

FORWARD TRANSMISSION CHARACTERISTICS (S21)

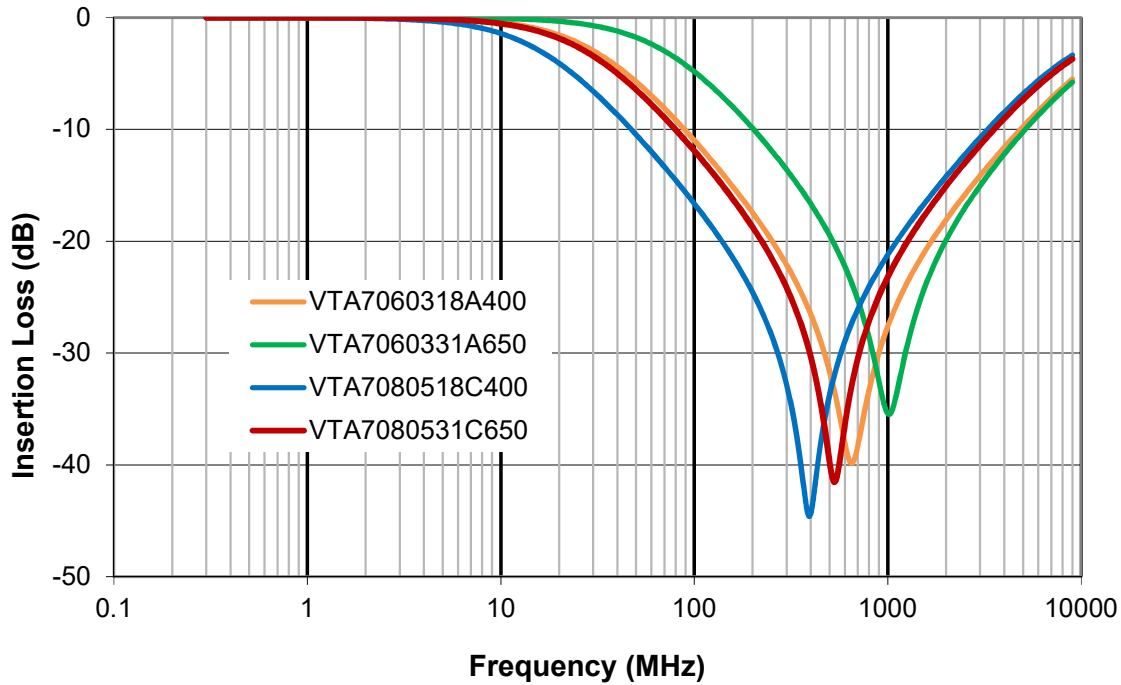

ESD RATING

AVX PN	IEC 61000-4-2	ISO 10605		AEC-Q200(Lvl.6)
	150 pF / 330 Ω Contact Discharge	330 pF / 330 Ω Contact Discharge	330 pF / 2000 Ω Contact Discharge	150 pF / 2000 Ω Air Discharge
VTA7060318A400	25 kV	30 kV	30 kV	25 kV
VTA7080518C400	30 kV	30 kV	30 kV	25 kV
VTA7060331A670	30 kV	30 kV	30 kV	25 kV
VTA7080531C650	30 kV	30 kV	30 kV	25 kV

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Varistors category](#):

Click to view products by [Kyocera AVX manufacturer](#):

Other Similar products are found below :

[820443211E](#) [MLV0603E30403T](#) [MOV05131AIA](#) [MOV07231AQA](#) [MOV18131CZA](#) [R71ZOV151HC](#) [D58ZOV500RA01T1](#)
[B72214S110K151](#) [B72214S251K151](#) [B72260B102K1](#) [B72280B271K1](#) [B72500E8250L60](#) [B72530E1140S272](#) [B72540E250K62](#)
[B72650M0151K093](#) [B72660M0271K093](#) [NTE1V020](#) [NTE1V130](#) [NTE2V010](#) [NTE2V130](#) [ROV20-220M-S](#) [ROV20H201K](#) [25FN511K](#)
[S10K11G5S5](#) [ERZ-C07DK221U](#) [ERZ-C14DK361U](#) [ERZ-C20DK221U](#) [207869-1](#) [TMOV25SP625E](#) [TND10V-471KB00AAA0](#)
[B72210S271K111](#) [B72214S200K551](#) [B72280B112K1](#) [B72280B381K1](#) [B72540E 350K 62](#) [B72590D360A60](#) [B72650M301K93](#)
[B72670M1140K72](#) [MOV07251ARA](#) [MOV10131EDA](#) [MOV10151EFA](#) [MOV14151CWA](#) [MOV20251DFA](#) [TVZ18EC271KBS](#)
[TVZ20EB911KBS](#) [TVZ25D201KBS](#) [TVZ25D241KBS](#) [VZ07D220KBS](#) [Z420LA20A](#) [ROV20H220M-S](#)