

**NEW**



Quality and reliability is our tradition

**KYORITSU**

# PV INSULATION EARTH TESTER KEW 6024PV

**No need to short circuit strings for measuring the insulation resistance!**



**PV Insulation**

**Insulation**

**Earth**

**Volts**



**IP54**

- **Correct measuring for Insulation resistance even if PV arrays are under generating power**
- **Waterproof design: Can measure under the bad weather condition**
- **Memory function up to 1000 data**
- **Luminescence button and Backlight**

KYORITSU ELECTRICAL INSTRUMENTS WORKS, LTD.


<http://www.kew-ltd.co.jp>

## ● KEW 6024PV Specifications

| Insulation resistance            |  | PV Insulation* |  | Insulation         |                |               |
|----------------------------------|--|----------------|--|--------------------|----------------|---------------|
| Test voltage                     | 500V   | 1000V          |  | 250V               | 500V           | 1000V         |
| Measuring range(Auto range)      | 20.00/200.0/2000MΩ   |                |  | 20.00/200.0/2000MΩ |                |               |
| Mid-scale value                  |  | —              |  | 50MΩ               |                |               |
| Rated current                    |  | —              |  | 1.0 - 1.2mA        |                |               |
|                                  |  |                |  | 0.25MΩ             | 0.5MΩ          | 1MΩ           |
| First effective measuring range  | 1.51 - 200.0MΩ   | 1.51 - 1000MΩ  |  | 1.51 - 100.0MΩ     | 1.51 - 200.0MΩ | 1.51 - 1000MΩ |
| Accuracy                         | ±1.5%rdg ±5dgt   |                |  | ±1.5%rdg ±5dgt     |                |               |
| Second effective measuring range | 0.00 - 1.50MΩ  | 0.00 - 1.50MΩ  |  | 1.20 - 1.50MΩ      | 1.20 - 1.50MΩ  | 1.20 - 1.50MΩ |
|                                  | 200.1 - 2000MΩ   | 1001 - 2000MΩ  |  | 100.1 - 2000MΩ     | 200.1 - 2000MΩ | 1001 - 2000MΩ |
| Accuracy                         | ±5.0%rdg ±6dgt   |                |  |                    |                |               |
| Open circuit voltage             | 0 - +20%   |                |  |                    |                |               |
| Short circuit current            | Max 1.5mA  |                |  |                    |                |               |
| Earth resistance                 |  |                |  |                    |                |               |
| Measuring range(Auto range)      | 20.00/200.0/2000Ω  |                |  |                    |                |               |
| Accuracy                         | ±3.0%rdg±0.1Ω (20Ωrange) ±3.0%rdg±3dgt (200/2000Ωrange)  |                |  |                    |                |               |
| Voltage measurement              |  |                |  |                    |                |               |
| Measuring range                  | AC 5 - 600V (45 - 65Hz)  | DC ±5 - ±1000V |  |                    |                |               |
| Accuracy                         | ±1.0%rdg±4dgt  |                |  |                    |                |               |
| General                          |  |                |  |                    |                |               |
| Applicable Standards             | IEC 61010-1 CAT IV 300V, CAT III 600V Pollution2<br>IEC 61010-2-030, IEC 61010-031, IEC 60529(IP54), IEC 61557-1,-2,-5,-10, IEC 61326-1,2-2(EMC), EN50581(RoHS)  |                |  |                    |                |               |
| Power source                     | LR6(AA) (1.5V) x 6   |                |  |                    |                |               |
| Dimensions / Weight              | 84(L) x 184(W) x 133(D)mm / Approx. 900g (including batteries)   |                |  |                    |                |               |
| Accessories                      | 7196A(Test leads with remote control switch), 7244A(Test lead with alligator clip), 8017(Extension prod), 8072(CAT II standard prod), 8212-USB(USB adaptor with "KEW Report (Software)" 9155(Shoulder strap), 9156(Carrying case), LR6 x 6, Instruction manual,Calibration Certificate |                |  |                    |                |               |
| Optional                         | 7243(L-shaped probe), 7245A(Precision measurement cord set), 8016(Hook type prod)  |                |  |                    |                |               |

\*6024PV supports the PV systems up to 1000V.

### Accurate and quick results also in case of large capacitance effects.

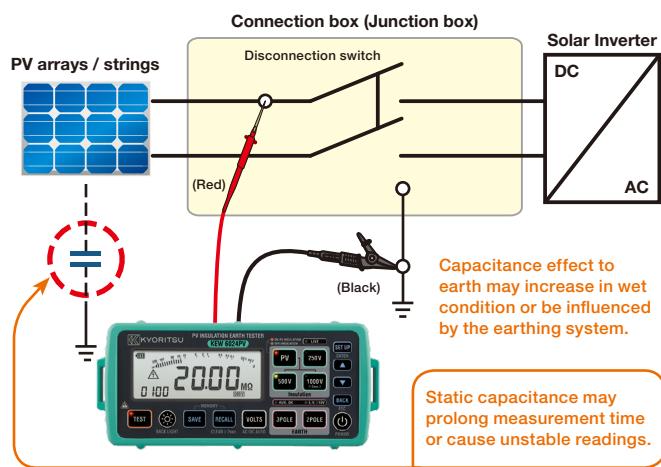


### ● Included Accessories



### ● Optional Accessories



### Analyzing and processing the recorded data with a PC.

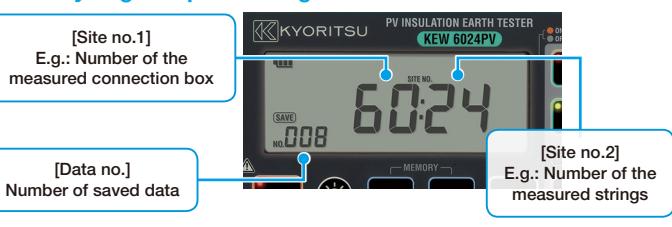

**Safety Warnings :** Please read the "Safety Warnings" in the instruction manual supplied with the instrument thoroughly and completely for correct use. Failure to follow the safety rules can cause fire, trouble, electrical shock, etc. Therefore, make sure to operate the instrument on a correct power supply and voltage rating marked on each instrument.

### For inquiries or orders :



**KYORITSU ELECTRICAL INSTRUMENTS WORKS, LTD.**

2-5-20, Nakane, Meguro-ku, Tokyo, 152-0031 Japan

Phone:+81-3-3723-0131

Fax:+81-3-3723-0152

E-mail:info-eng@kew-ltd.co.jp

<http://www.kew-ltd.co.jp>

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Kyoritsu manufacturer:***

Other Similar products are found below :

[KEW1012](#) [KEW1030](#) [KEW105811](#) [KEW105816](#) [KEW2010](#) [KEW2012RA](#) [KEW2210R](#) [KEW2413F](#) [KEW2433R](#) [KEW2500](#) [KEW3551](#)  
[KEW5020](#) [KEW5406A](#) [KEW5711](#) [KEW7066A-PP10A](#) [KEW7073](#) [KEW7122B](#) [KEW7127B](#) [KEW7141B](#) [KEW7161A](#) [KEW7218R](#)  
[KEW7256](#) [KEW8112](#) [KEW8127](#) [KEW9095](#) [KEW9107](#) [KEW9154](#) [KEWMATE 2000A](#) [KEWMATE 2001A](#)