

PHYSICAL DIMENSIONS:


- A 3.05 [.120] ± 0.08 [.003]
- B 2.54 [.100] ± 0.08 [.003]
- B₁ 3.05 [.120] ± MAX
- C 8.51 [.335] ± 0.23 [.009]
- C₁ 9.53 [.375] ± MAX

WIRE DIMENSIONS:

- T₁ 1.27 [.050] ± 0.05 [.002]
- T₂ 1.52 [.060] ± 0.51 [.020]

28F0121-1SR-10

UNCONTROLLED DOCUMENT

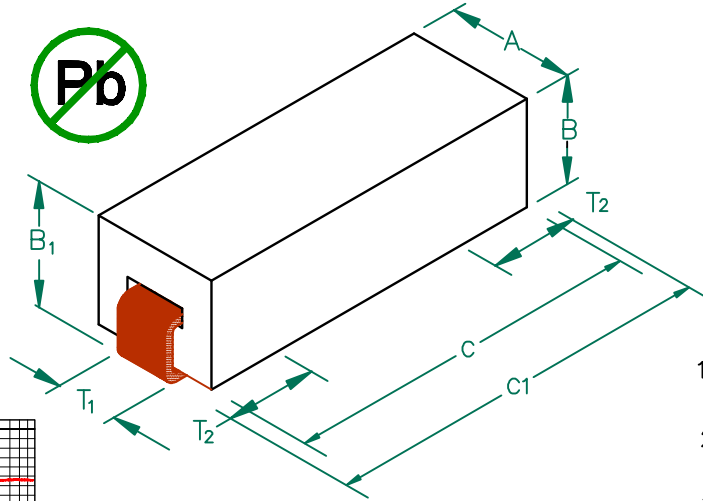


ELECTRICAL CHARACTERISTICS:

Z @ 100MHz (Ω)	DCR (Ω)	Rated Current
Nominal	96	
Minimum	72	
Maximum	120	10,000 mA


NOTES: UNLESS OTHERWISE SPECIFIED

1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 13" REELS, 2500 PCS/REEL.
2. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
3. REF. CARRIER TAPE SPECIFICATION # CART121-13.


Z vs. FREQUENCY
IMPEDANCE UNDER DC BIAS

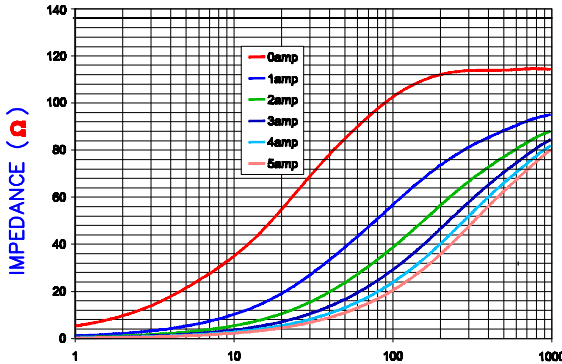


FREQUENCY (MHz)
|Z|, R, AND X vs. FREQUENCY

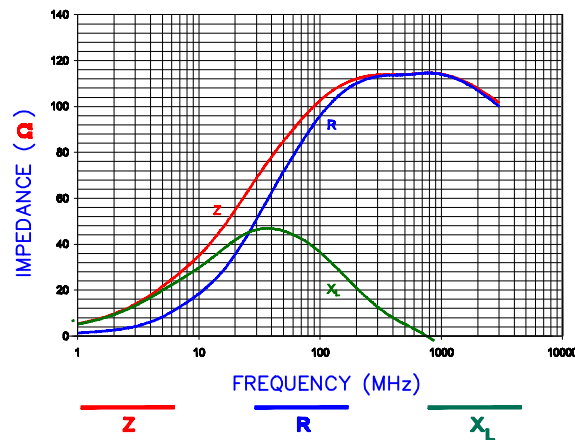

LAND PATTERNS FOR REFLOW SOLDERING


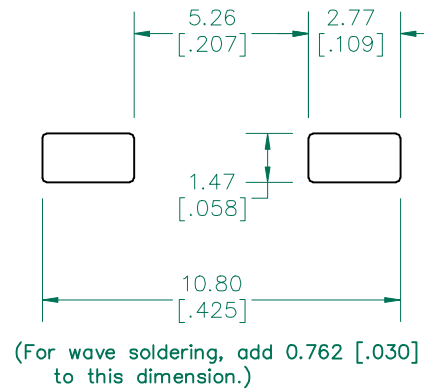


RECOMMENDED SOLDERING CONDITIONS

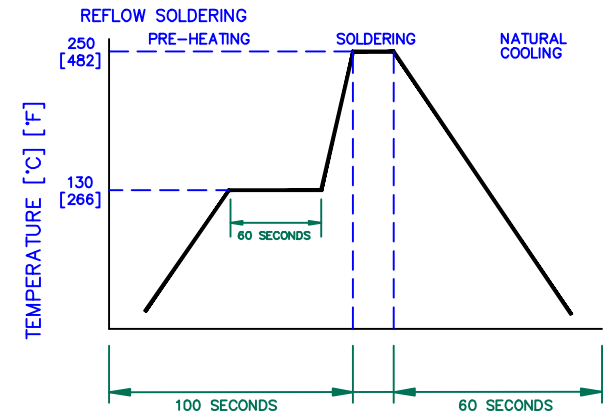

DIMENSIONS ARE IN mm (INCHES).				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.	
F	UPDATE COMPANY LOGO	10/24/08	JRK	Laird TECHNOLOGIES PROJECT/PART NUMBER: 28F0121-1SR-10 DATE: 10/06/03 SCALE: NTS SHEET: 2 of 3	
E	UPDATE LANDPATTERN ADD ROHS SYMBOL	08/09/07	JRK		
D	UPDATE COMPANY LOGO	04/19/07	JRK		
C	ADD KGS TO WGT&LBS TO PART WGT	09/13/05	JRK		
B	CHANGE RATED CURRENT FROM 5000mA	02/17/04	JRK		
A	ORIGINAL DRAFT	10/06/03	JRK	REV F PART TYPE: ASSEMBLY DRAWN BY: JRK CAD # 28F0121-1SR-10-F TOOL # -	
REV	DESCRIPTION	DATE	INT		

UNCONTROLLED DOCUMENT

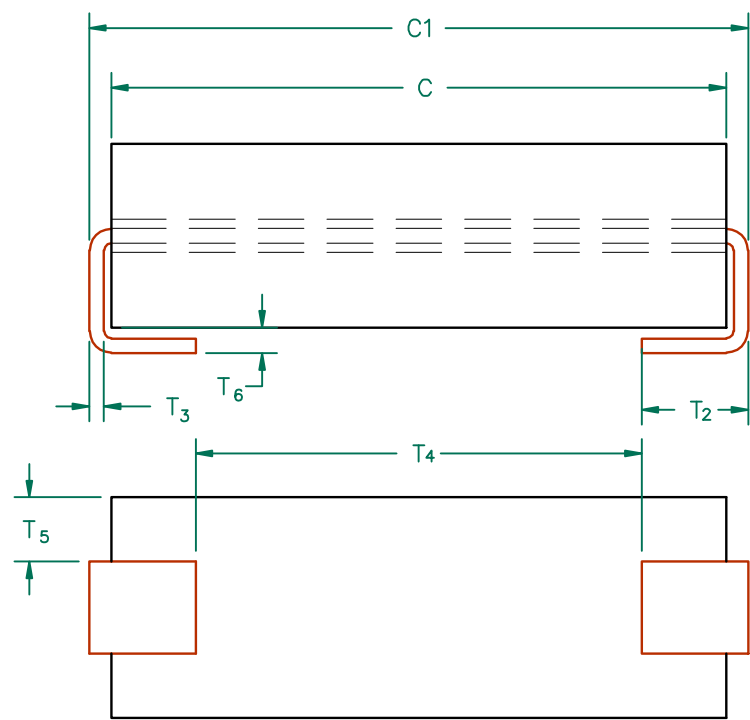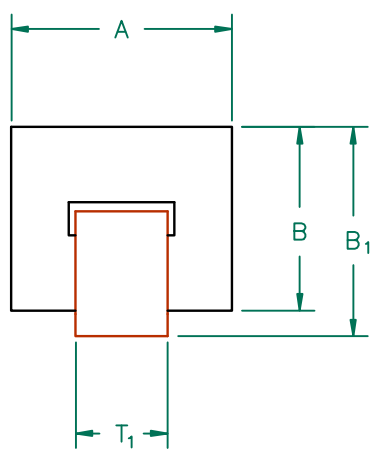

ELECTRICAL TESTING

TEST:	GROSS	GROSS
# TURNS	Z	Z
AWG	1	1
FREQUENCY	22	22
NOMINAL	25 MHz	100 MHz
MINIMUM	67 Ω	96 Ω
MAXIMUM	- Ω	72 Ω
WEIGHT/K	- Ω	120 Ω
	0.297 kgs.	0.66 Lbs.

DIMENSIONS:

A	3.05 [.120]	+	0.08 [.003]
B	2.54 [.100]	+	0.08 [.003]
B ₁	3.05 [.120]	+	MAX
C	8.51 [.335]	+	0.23 [.009]
C ₁	9.53 [.375]	+	MAX



NOTES: UNLESS OTHERWISE SPECIFIED

1. WIRE: FLAT, OXYGEN FREE COPPER 1.27 X 0.20 [.050 X .008] PLATED 100% TIN OVER NICKEL. TIN THICKNESS: 0.005 [.0002], NICKEL THICKNESS: 0.0002 [.00008].
2. IMPEDANCE VALUES ARE GROSS, MEASURED USING WS50x8 WIRE w/ NO D.C. BIAS.
3. REFERENCE STEWARD WIRE PURCHASE SPEC. WS50x8-*
4. *ON = PARYLENE COATED (.00025" TH).
5. REFERENCE STEWARD CORE P/N 28H0121-*00.

WIRE DIMENSIONS:

T ₁	1.27 [.050]	+	REF.
T ₂	1.52 [.060]	+	0.51 [.020]
T ₃	0.20 [.008]	+	REF.
T ₄	5.97 [.235]	+	TYP.
T ₅	0.89 [.035]	+	0.25 [.010]
T ₆	0.43 [.017]	+	MAX

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
F	UPDATE COMPANY LOGO	10/24/08	JRK				
E	UPDATE LANDPATTERN ADD ROHS SYMBOL	08/09/07	JRK				
D	UPDATE COMPANY LOGO	04/19/07	JRK				
C	ADD KGS TO WGT&LBS TO PART WGT	09/13/05	JRK				
B	CHANGE RATED CURRENT FROM 5000mA	02/17/04	JRK				
A	ORIGINAL DRAFT	10/06/03	JRK	PROJECT/PART NUMBER:	REV	PART TYPE:	DRAWN BY:
REV	DESCRIPTION	DATE	INT	28F0121-1SR-10	F	ASSEMBLY	JRK
				DATE:	SCALE:	SHEET:	
				10/06/03	10 : 1	3 of 3	
				CAD #	TOOL #		
				28F0121-1SR-10-3-F	H0121		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [EMI Feedthrough Filters](#) category:

Click to view products by [Laird](#) manufacturer:

Other Similar products are found below :

[M15733/28-0001](#) [FN7660-100-M8](#) [FN7660-200-M10](#) [2443-007-X5S0-102MLF](#) [2443-007-X5W0-502ZLF](#) [2463-001-X5S0-471MLF](#)
[1609992-3](#) [1609993-1](#) [FN7510-100-M8](#) [FN7510-32-M4](#) [FN7511-200-M10](#) [FN7562-100-M8](#) [FN7562-200-M10](#) [FN7563-100-M8](#) [FN7611-](#)
[10-M3](#) [2450-000-X5U0-102PLF](#) [2499-003-X5S0-152MLF](#) [4201-050](#) [4202-025](#) [4251-001LF](#) [4253-002LF](#) [4300-031](#) [4305-001LF](#) [4305-](#)
[008LF](#) [4306-019LF](#) [4600-072LF](#) [4403-060](#) [4600-067](#) [100AFC6-G](#) [10AFC6-B](#) [1-1609990-7](#) [1-1609990-1](#) [FN7510-16-M4](#) [FN7514-32-M4](#)
[FN7611-32-M4](#) [FN7660-10-M3](#) [SXD1A3-251](#) [4206-502](#) [M15733/62-0002](#) [4306-011LF](#) [4201-502](#) [4401-011LF](#) [4300-314-2](#) [4251-002LF](#)
[4305-005LF](#) [2461-002-X7V0-102MLF](#) [4201-051LF](#) [4403-005](#) [4311-000LF](#) [4311-001LF](#)