

# CM3032V201R-10

**UNCONTROLLED DOCUMENT**




## PHYSICAL DIMENSIONS:

|                |              |               |
|----------------|--------------|---------------|
| A              | 7.62 [.300]  | + 0.13 [.005] |
| B              | 8.13 [.320]  | + 0.13 [.005] |
| B <sub>1</sub> | 10.92 [.430] | MAX           |
| C              | 9.45 [.372]  | + 0.15 [.006] |
| C <sub>1</sub> | 10.08 [.397] | MAX           |
| D              | 4.06 [.160]  | + 0.05 [.002] |
| E              | 1.27 [.050]  | + 0.13 [.005] |
| E <sub>1</sub> | 2.03 [.080]  | + 0.13 [.005] |



## WIRE DIMENSIONS:

|                |             |               |
|----------------|-------------|---------------|
| T <sub>1</sub> | 3.30 [.130] | + 0.38 [.015] |
| T <sub>2</sub> | 0.64 [.025] | TYP.          |
| T <sub>3</sub> | 0.38 [.015] | TYP.          |


Z vs. FREQUENCY (C,O,N)

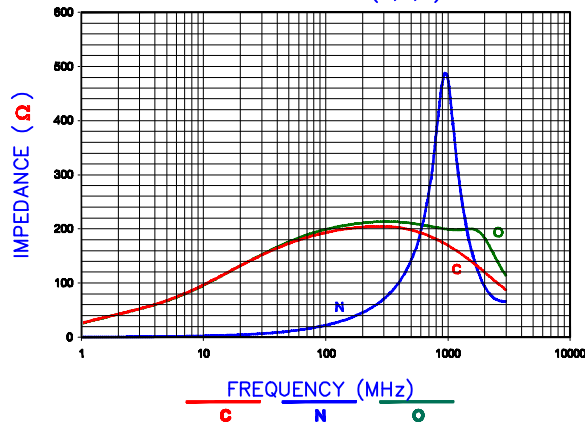


Z, R, XL vs. FREQUENCY

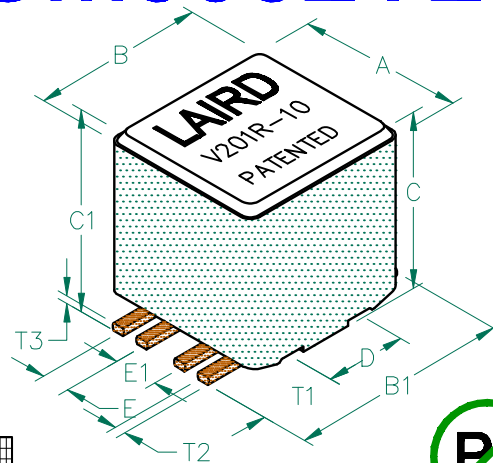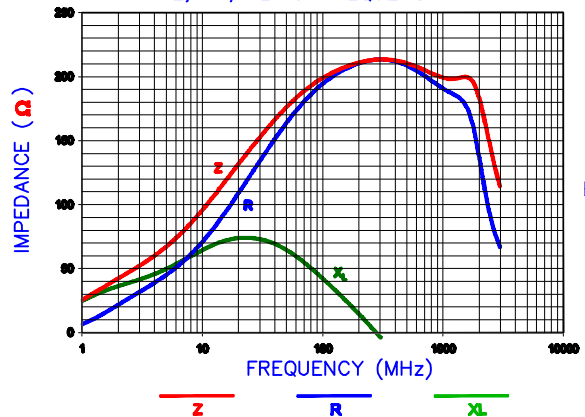

## LAND PATTERNS FOR REFLOW SOLDERING

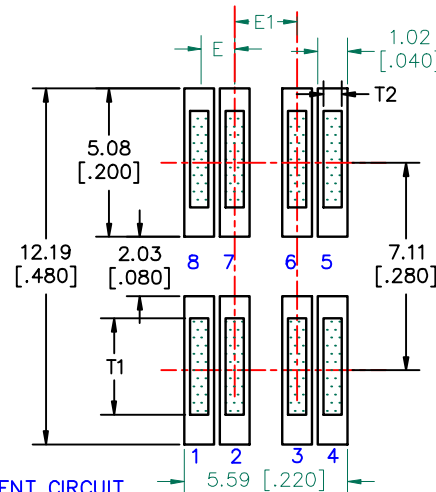

## EQUIVALENT CIRCUIT




## ELECTRICAL CHARACTERISTICS:

| Z @ 100MHz (Ω) | DCR (Ω) | Rated Current | Rated Voltage (VDC) |
|----------------|---------|---------------|---------------------|
| Nominal        | 200     |               |                     |
| Minimum        | 150     |               |                     |
| Maximum        | 250     | 0.01          | 8,000 mA            |
|                |         |               | 30                  |





NOTES: UNLESS OTHERWISE SPECIFIED

1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS, 13" REELS, 400 PCS/REEL.
2. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
3. REF. CARRIER TAPE SPECIFICATION # CART3032-23.
4. TERMINATION FINISH IS 100% TIN.
5. THIS PART HAS NO PIN POLARITY.
6. OPERATION TEMPERATURE (INCLUDING SELF-HEATING): -40 ~ +125°C.

## RECOMMENDED SOLDERING CONDITIONS

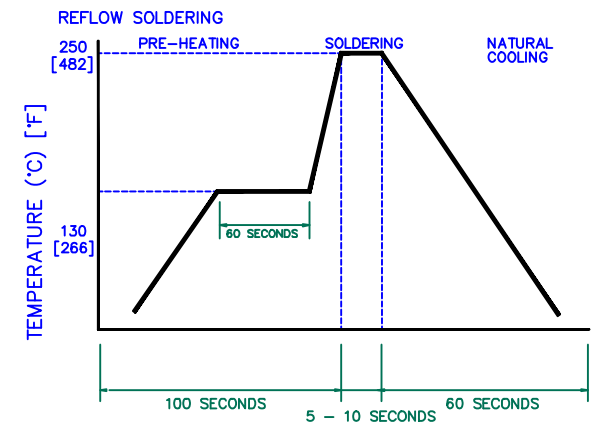

| DIMENSIONS ARE IN mm (INCHES).  |  |          |     | This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved. |  |  |  |
|---------------------------------|--|----------|-----|---|--|--|--|
| D                               | ADD RATED VOLTAGE AND NOTE 6   | 08/30/12 | QIU | <b>Laird TECHNOLOGIES</b><br>PROJECT/PART NUMBER: <b>CM3032V201R-10</b><br>REV <b>D</b> PART TYPE: <b>ASSEMBLY</b> DRAWN BY: <b>JRK</b><br>DATE: 05/28/04<br>SCALE: <b>NTS</b> SHEET: <b>2 of 3</b><br>TOOL # <b>-</b>                                  |  |  |  |
| C                               | UPDATE COMPANY LOGO & KAPTON LABEL ADD EQUIV. CIRCUIT CORRECT REEL QTY | 11/05/08 | JRK |   |  |  |  |
| B                               | UPDATE COMPANY LOGO  | 11/21/07 | JRK |   |  |  |  |
| A                               | ORIGINAL DRAFT   | 5/28/04  | JRK |   |  |  |  |
| REV                             | DESCRIPTION  | DATE     | INT |   |  |  |  |
| CAD # <b>CM3032V201R-10-D-2</b> |  |          |     |   |  |  |  |

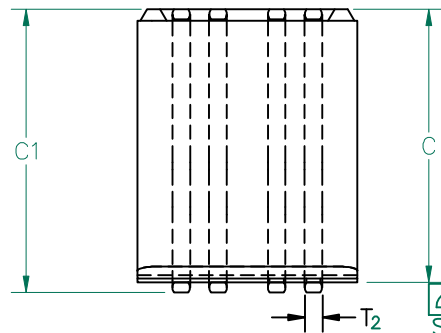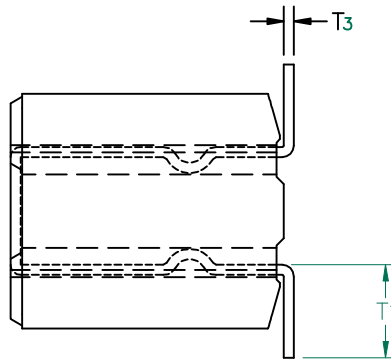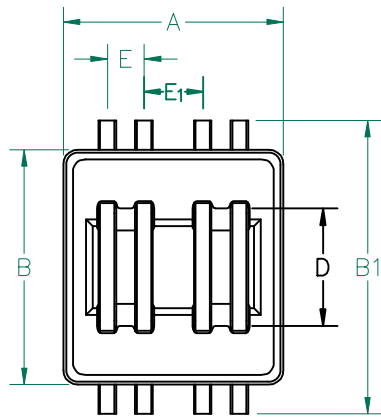

$\nabla$  0.004 (0.10)  
SEATING PLANE  
(CO-PLANARITY)

**LAIRD**  
V201R-10  
PATENTED

LABEL

**ELECTRICAL TESTING**

| TEST:       | GROSS        | GROSS        |
|-------------|--------------|--------------|
|             | Z            | Z            |
| # TURNS     | 1            | 1            |
| AWG         | 22           | 22           |
| FREQUENCY   | 25 MHz       | 100 MHz      |
| NOMINAL     | 113 $\Omega$ | 200 $\Omega$ |
| MINIMUM     | 87 $\Omega$  | 150 $\Omega$ |
| MAXIMUM     | - $\Omega$   | 250 $\Omega$ |
| WEIGHT/1000 | 2.44 kgs.    | 5.39 lbs.    |

**UNCONTROLLED DOCUMENT**

**DIMENSIONS:**

|    |              |   |             |
|----|--------------|---|-------------|
| A  | 7.62 [.300]  | + | 0.13 [.005] |
| B  | 8.13 [.320]  | + | 0.13 [.005] |
| B1 | 10.92 [.430] |   | MAX         |
| C  | 9.45 [.372]  | + | 0.15 [.006] |
| C1 | 10.08 [.397] |   | MAX         |
| D  | 4.06 [.160]  | + | 0.05 [.002] |
| E  | 1.27 [.050]  | + | 0.13 [.005] |
| E1 | 2.03 [.080]  | + | 0.13 [.005] |

**WIRE DIMENSIONS:**

|    |             |   |             |
|----|-------------|---|-------------|
| T1 | 3.30 [.130] | + | 0.38 [.015] |
| T2 | 0.64 [.025] |   | TYP.        |
| T3 | 0.38 [.015] |   | TYP.        |



**NOTES: UNLESS OTHERWISE SPECIFIED**

1. WIRE: REFERENCE STEWARD WIRE PURCHASE SPEC. W0032-21
2. IMPEDANCE VALUES ARE GROSS, MEASURED USING W0032-21 WIRE PLACED AGAINST END OF SLOT w/ NO D.C. BIAS.
3. REFERENCE STEWARD CORE P/N 24H0300-200.
4. PROTECTED BY U.S. PATENT NO. 5,455,552.
5. TERMINATION FINISH IS 100% TIN.
6. THIS PART HAS NO PIN POLARITY.

| DIMENSIONS ARE IN mm (INCHES). |   |          |     | This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved. |        | <b>Laird TECHNOLOGIES</b> |           |
|--------------------------------|---|----------|-----|---|--------|---------------------------|-----------|
| D                              | ADD RATED VOLTAGE AND NOTE 6  | 08/30/12 | QIU | PROJECT/PART NUMBER:  | REV    | PART TYPE:                | DRAWN BY: |
| C                              | UPDATE COMPANY LOGO & KAPTON LABEL<br>ADD EQUIV. CIRCUIT CORRECT REEL QTY | 11/05/08 | JRK | CM3032V201R-10  | D      | CO-FIRE                   | JRK       |
| B                              | UPDATE COMPANY LOGO   | 11/21/07 | JRK | DATE:   | SCALE: | NTS                       | SHEET:    |
| A                              | ORIGINAL DRAFT  | 5/28/04  | JRK | 05/28/04  |        |                           | 3 of 3    |
| REV                            | DESCRIPTION   | DATE     | INT | CAD #   | TOOL # | H0300-100                 |           |
|                                |   |          |     | CM3032V201R-10-D-3  |        |                           |           |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Common Mode Chokes / Filters](#) category:*

*Click to view products by [Laird](#) manufacturer:*

Other Similar products are found below :

[PE-64683](#) [RD5122-6-9M6](#) [RGCMF1210900H3T](#) [ST6118T-R](#) [FE3X025-10-7NL](#) [T8114NLT](#) [TCM0806G-350-2P-T](#) [TCM0806G-650-2P-T](#)  
[IND-0110](#) [UAL21VR0802000](#) [UALSC023000000](#) [UALSC1020JH000](#) [UALSU10VR15019](#) [UALSU9VD070100](#) [36-00037](#) [5701610000](#)  
[UALW21HS072450](#) [UALSU9HF050500](#) [UALSU9H0208000](#) [UAL24VK06450CH](#) [PLT10HH501100PNB](#) [PLT10HH401100PNB](#)  
[PLT10HH1026R0PNB](#) [PE-67531](#) [TLH10UB](#) [113 OR5](#) [2752045447](#) [CM8663Z161B-10](#) [7351V](#) [CMF16-153131](#) [T8116NLT](#) [CMS2-10-R](#)  
[FE2X10-4-2NL](#) [T8003NLT](#) [CTX66-19521-R](#) [RC212-0.5-10M](#) [RC112-0.4-15M](#) [RC212-0.6-6M8](#) [RC212-0.4-15M](#) [RC112-0.3-30M](#) [4534-3](#)  
[WTCF2012Z0M751PB](#) [PH9408.814NLT](#) [B82498B3221J000](#) [PAC6006.364NLT](#) [PAC6006.444NLT](#) [PAC6006.204NLT](#) [PH9407.204NLT](#)  
[PAC6006.264NLT](#) [PH9408.105NLT](#) [PH9408.494NLT](#)