

# Eccosorb® BSR / MFS

## High Loss, Magnetically Loaded, Elastomeric Microwave Absorber



### HIGH-LOSS ELASTOMERIC ABSORBER

Eccosorb BSR / MFS is a thin, flexible, high-loss, electrically non-conductive silicone absorber. It is designed for the frequency range from 1 GHz to mm wave. It has low outgassing properties and high temperature resistance. BSR / MFS is flexible and can be fitted to compound curves. BSR and MFS refer to the same product where BSR-1 is MFS-124 and BSR-2 is MFS-117.

### FEATURES AND BENEFITS

- Flexible structure for improved fit
- High thermal stability
- Electrically non-conductive
- High magnetic loss
- Low outgassing
- Good adhesion to metals

### MARKETS

- Mobile / Data Infrastructure
- Security and Defense
- Automotive Electronics
- Industrial Electronics

### VALUE

- Simplified design due to mechanical and electrical properties
- Environmentally friendly solution meeting regulatory requirements of RoHS and REACH
- Improved reliability performance of electronics
  - Better signal integrity due to high reduction of EMI
  - Consistent electronics performance due to low outgassing properties
  - Reliable mechanical attachment

TYPICAL PROPERTIES	TYPICAL DATA
Frequency Range (GHz)	1 – 40
Service Temperature °C	160
Flame Rating	UL 94 V-0 (BSR-1)
Hardness (Shore A)	> 70
Elongation (%)	50
Tensile Strength (MPa)	5.0
Volume Resistivity (ohm-cm)	$2 \times 10^8$
Thermal Expansion (per °C)	$63 \times 10^{-6}$
Thermal Conductivity (W/mK)	0.865
Water Absorption (% 24 hours)	< 0.1
Dielectric Strength (v/mil)	> 10
Outgassing (%TML) (%CVCM)*	0.47 / 0.28

*Data for design engineer guidance only. Observed performance varies in application. Engineers are reminded to test the material in application.*

\* Outgassing data per ASTM E595-07; criteria for acceptability is 1.00% TML and 0.10% CVCM.

### APPLICATIONS

- Eccosorb BSR/MFS is engineered to reduce or eliminate surface currents, cavity resonance, coupling, and generally dampen reflections. It will significantly improve the operation of microwave devices by lowering the Q of cavities.
- Eccosorb BSR/MFS is recommended for use in high reliability aerospace, military, and space applications, exhibiting excellent thermal cycling, shock and vibration absorption characteristics.
- Some other applications include power amplifiers, oscillators and down/up converters.

Americas: +1.866.928.8181  
Europe: +49.(0).8031.2460.0  
Asia: +86.755.2714.1166

# Hybrid Thermal/EMI Absorber


## AVAILABILITY

- Standard sheets are 305 x 305mm (12"x12").
- Standard thicknesses are 0.25mm (0.010"), 0.50mm (0.020"), 1.0mm (0.040"), 1.5mm (0.060") and 2.54mm (0.100")
- For most applications material is supplied with a pressure sensitive adhesive.
- It can be supplied with or without pressure sensitive adhesive (PSA).
- Available in other thicknesses, sizes, and customer specified shapes upon request.

## INSTRUCTIONS FOR USE

- This material is designed to function directly in front of a metallic surface.
- For applications where the service temperature exceeds 121°C (250°F), the material can be bonded to most substrates by using an RTV silicone based adhesive in conjunction with a suitable primer.
- This material can be readily cut with a sharp knife and template. It is a very flexible material and conforms to contoured surfaces.

**Typical Attenuation for BSR / MFS**

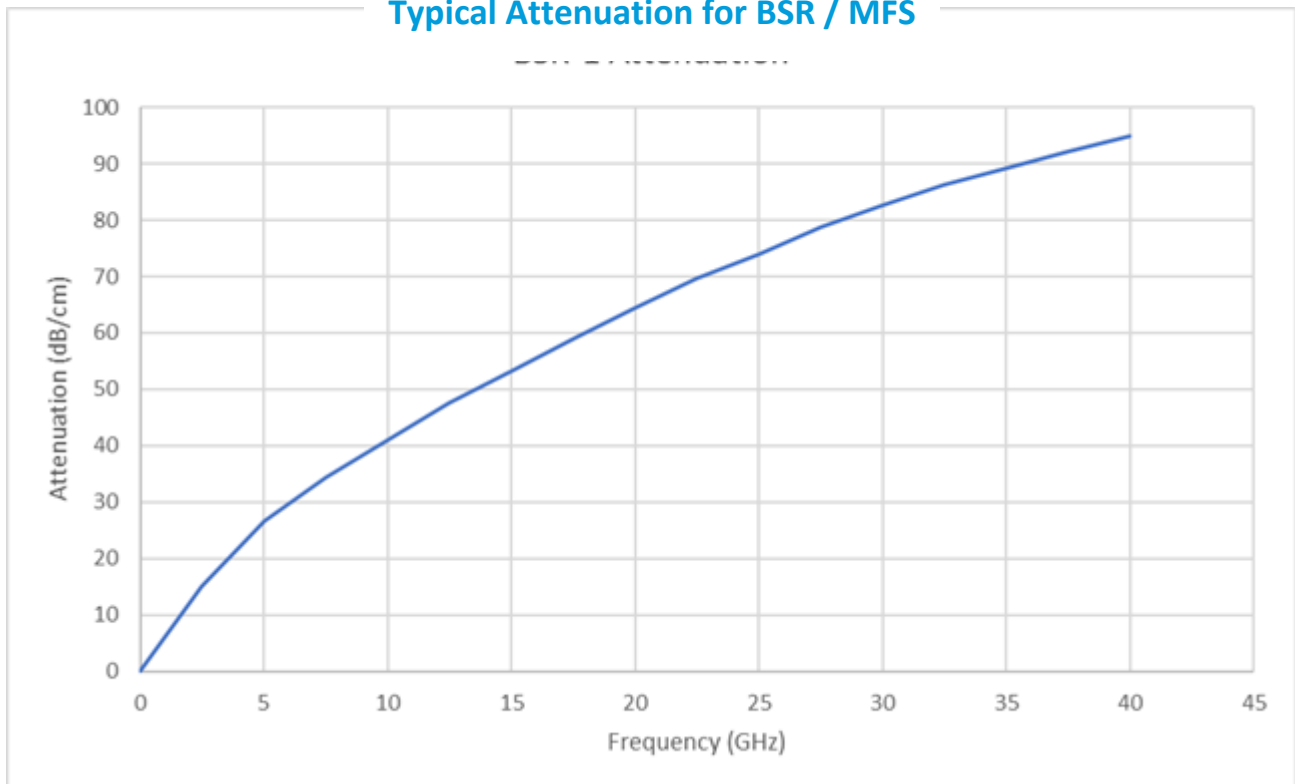

RFP-DS-BSR MFS 012618

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [EMI Gaskets, Sheets, Absorbers & Shielding](#) category:*

*Click to view products by [Laird Connectivity](#) manufacturer:*

Other Similar products are found below :

[8101010140](#) [8563-0090-89](#) [1194-7.7X10](#) [1245-34"X18YD](#) [1267](#) [1345-3/8x18yrd](#) [1554907-1](#) [2320002000](#) [2320014700](#) [SG293037DS](#)  
[ST005PCN50](#) [55005107](#) [38M4040AA0606](#) [46J5N02020.NN00](#) [1125-8X10](#) [1126X1"](#) [1170-3/4X18YDS](#) [1170-7.7x10](#) [1183-12"X18YD](#) [6-](#)  
[34T-BD-0.315](#) [SG125187D-24](#) [SG125250R-24](#) [SG187375R-24](#) [SG284050DS](#) [8402010540](#) [KIT TECH CLIP](#) [10-40450-28S](#) [1245](#) [1267-](#)  
[1/2"x18yd](#) [46J8501020.NN00](#) [1170-1/4"x18yd](#) [AL-36FR-1x54.5](#) [3013310A](#) [1194X1"](#) [3020604](#) [3021302](#) [3031313](#) [260709](#) [3021310](#) [6-](#)  
[34UT-070-BD-16](#) [303076048](#) [46J5N03020.NN00](#) [30206025](#) [30395641](#) [3030403](#) [3690103020](#) [HNY-LT15CU4241](#) [46X7503020.NN00](#)  
[46W5E02520.NN00](#) [302095032](#)