



NI/CU NYLON RIPSTOP FABRIC WITH ANTI-FRAY

Laird Technologies' Electron[®] Nickel/Copper Nylon Ripstop is a unique fabric, manufactured using a patented, proprietary technology. This technology combines highly conductive copper and corrosion resistant nickel with the light weight, drapability, strength, flexibility, conformability, and attractive appearance of a nylon ripstop fabric. Nickel/Copper Nylon Ripstop offers excellent shielding effectiveness for a variety of applications.

Electron[®] Nickel/Copper Nylon Ripstop can be used in many different configurations to protect against EMI/RFI and ESD in a variety of applications. Typical applications include: enclosures, cables, tapes, and grounding.

FEATURES


- RoHS compliant
- Halogen-free per IEC-61249-2-21 standard
- Low surface resistivity of $< 0.07 \Omega/\square$ provides excellent conductivity
- Shielding effectiveness of >62 dB across a wide spectrum of frequencies

MARKETS

- Cabinet applications
- LCD and Plasma TV
- Medical equipment
- Servers
- Printers
- Laptop computers



**Ni/Cu Nylon Ripstop with Anti-Fray (3050-525)
Shielding Effectiveness**

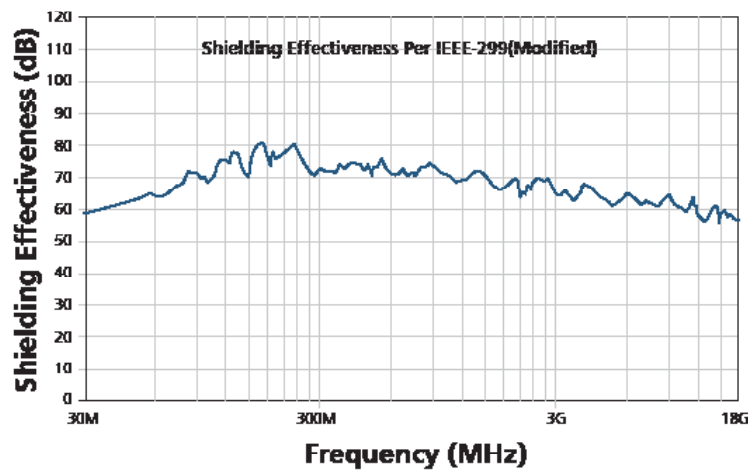

USA: +1.866.928.8181
Europe: +49.0.8031.2460.0
Asia: +86.755.2714.1166

PHYSICAL PROPERTIES

Item	Unit	Value	Advantage
Substrate		Nylon Ripstop	Strong, Flexible, Conformable
Metal		Ni/Cu	Corrosion Resistant, Highly Conductive
Total Weight	oz/yd ² (g/m ²)	2.1 – 2.7 (71 – 92)	Light Weight
Thickness, (nominal)	inches (microns)	0.005 (127)	Thin and Flexible
Metal Weight	oz/yd ² (g/m ²)	0.75 – 1.15 (25 -39)	Excellent Electrical Properties
Max Short Duration Temperature	°C	200	Allows Thermal Processing

ELECTRICAL PROPERTIES

Item	Unit	Value
Surface Resistivity (ASTM F390)	ohms/square	≤ 0.07
Far-field Shielding	effectiveness	(typical)
30 MHz to 300 MHz	dB	72 average
300 MHz to 3 GHz	dB	71 average
3 GHz to 18 GHz	dB	62 average

MECHANICAL PROPERTIES

Item	Unit	Value ^{fi}
Tensile Strength, CMD/MD ^o (ASTM D5035)	lb/in	25/50
Elongation, MD (ASTM D5035)		30%

^{fi} Typical values for greige fabric

^o Cross Machine Direction/Machine Direction

Values presented have been determined by standard test methods and are typical values not to be used for specification purposes.

EMI-DS-FOF-3050-525_051315

Any information furnished by Laird and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird, Laird Technologies, Inc or any of its affiliates or agents shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2015 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trademarks or registered trademarks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [EMI Gaskets, Sheets, Absorbers & Shielding](#) *category:*

Click to view products by [Laird Connectivity](#) *manufacturer:*

Other Similar products are found below :

[8101010140](#) [8563-0090-89](#) [1194-7.7X10](#) [1245-34"X18YD](#) [1267](#) [1345-3/8x18yrd](#) [1554907-1](#) [2320002000](#) [2320014700](#) [SG293037DS](#)
[ST005PCN50](#) [55005107](#) [38M4040AA0606](#) [46J5N02020.NN00](#) [1125-8X10](#) [1126X1"](#) [1170-3/4X18YDS](#) [1170-7.7x10](#) [1183-12"X18YD](#) [6-](#)
[34T-BD-0.315](#) [SG125187D-24](#) [SG125250R-24](#) [SG187375R-24](#) [SG284050DS](#) [8402010540](#) [KIT TECH CLIP](#) [1194](#) [10-40450-28S](#) [1245](#)
[1267-1/2"x18yd](#) [46J8501020.NN00](#) [1170-1/4"x18yd](#) [AL-36FR-1x54.5](#) [3013310A](#) [1194X1"](#) [3020604](#) [3021302](#) [3031313](#) [260709](#) [3021310](#) [6-](#)
[34UT-070-BD-16](#) [303076048](#) [46J5N03020.NN00](#) [30206025](#) [30395641](#) [3030403](#) [3690103020](#) [HNY-LT15CU4241](#) [46X7503020.NN00](#)
[46W5E02520.NN00](#)