

Innovative **Technology** for a **Connected** World

ThermaTEC[™] Series HT8,7,F2,3030

Thermoelectric Modules



The ThermaTEC[™] Series of thermoelectric modules (TEMs) are designed to operate under cycling conditions or high temperature applications.

This product line is available in multiple configurations and is ideal for applications that require both heating and cooling mode (reverse polarity) or power generation. Assembled with proprietary solder construction, Bismuth Telluride semiconductor material and thermally conductive Aluminum Oxide ceramics, the ThermaTEC™ Series is designed for higher current and larger heat-pumping applications.

FEATURES

- Thermal Cycling Durability
- Power Cycling Reliability
- Precise Temperature Control
- Strong Lead Attachment
- RoHS Compliant
- Continuous Operation at High Temperatures

APPLICATIONS

- Analytical Instrumentation
- PCR Cyclers
- Thermal Test Sockets
- Electronic Enclosure Cooling
- Chillers (Liquid Cooling)
- Power Generation

PERFORMANCE SPECIFICATIONS					
Hot Side Temperature (°C)	25°C	50°C			
Qmax (Watts)	40.7	45.5			
Delta Tmax (°C)	63	75			
Imax (Amps)	8.5	8.7			
Vmax (Volts)	8.1	9.2			
Module Resistance (Ohms)	0.88	0.99			

SUFFIX	THICKNESS (PRIOR TO TINNING)	FLATNESS & PARALLELISM	HOT FACE	COLD FACE	Lead Length
11	0.131"± 0.005"	0.002" / 0.0035"	Lapped	Lapped	6.0
TA	0.131"± 0.001"	0.001" / 0.001"	Lapped	Lapped	6.0"
ТВ	$0.131'' \pm 0.0005''$	0.0005" / 0.0005"	Lapped	Lapped	6.0"

SEALING OPTION

SUFFIX	SEALANT	COLOR	TEMP RANGE	DESCRIPTION
R	RTV	White	-60 to 204 °C	Non-corrosive, silicone adhesive sealant
E	Ероху	Black	-55 to 150 °C	Low density syntactic foam epoxy encapsulant

global solutions: local support ™

Americas: +1 888.246.9050 Europe: +46.31.420530 Asia: +86.755.2714.1166

clv.customerpos@lairdtech.com

www.lairdtech.com




ThermaTEC™ Series HT8,7,F2,3030

Thermoelectric Modules

Innovative **Technology** for a **Connected** World

Performance Curves at Th = 25°C

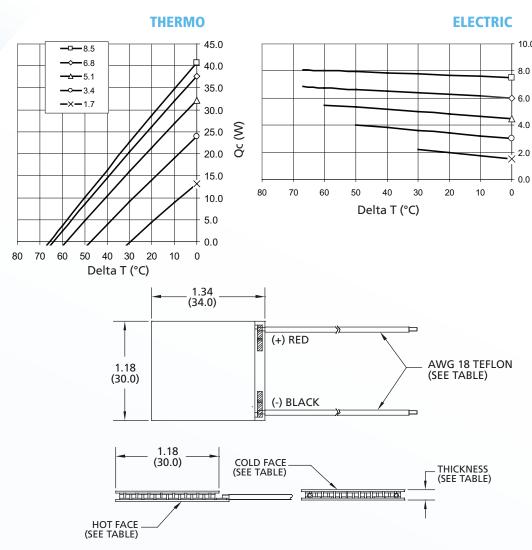

Ceramic Material: Alumina (Al₂O₃) Solder Construction: 271°C, Proprietary

OPERATING TIPS

- Max Operating Temperature: 175°C
- Do not exceed Imax or Vmax when operating module
- Reference assembly guidelines for recommended installation

THR-DS-HT8,7,F2,3030 0509

Any information furnished by Laird Technologies and its agents is believed to be accurate and reliable. Responsibility for the use and application of Laird Technologies materials rests with the end user since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies materials are to the fitness, merchantability, or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies terms and conditions of sale in effect from time to time, a copy of which will be furnished upon request. For further information please visit our website at www.lairdtech.com Alternatively contact: sales@lairdtech.com. Bluetooth* is a trademark owned by Bluetooth SIG, Inc., USA and licensed to Laird Technologies.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Thermoelectric Peltier Modules category:

Click to view products by Laird Connectivity manufacturer:

Other Similar products are found below:

C3100-1980 C3200-0504 C3200-0505 C3200-371 C3400-0262 430084-505 C3400-215 430866-501 CP39136H CP35447 CP85204035 CP60131H CPM-2F CP853345H CP85138 CP35347 430077-523 CP081030-M CP12437 CP30138H CP30338 CP303385H CP35247 CP39236H CP393365H CP40236 CP40247 CP40347 CP50441 CP60231H CP60233 CP60239H CP60240 CP60301540 CP60333 CP603395H CP60340 CP603495H CP60440 CP70437 CP854345H CP854705-2 CP10205033 CP10304033 CP1054033H CP115035335 CP144745325 CP200543636 CP2020405H CP203475H