

### LOSSY, FLEXIBLE FOAM ABSORBER

Eccosorb LS is the most widely known, used, and recommended polyurethane foam absorber. Eccosorb LS obtains its microwave properties via impregnation with a carbon black dispersion and is therefore electrically conductive. It is a very low cost solution for many applications over the thinner, more expensive rubber absorbers.

#### FEATURES AND BENEFITS

- Flexible, foam material
- High loss, low density
- Very low cost

#### MARKETS

- Commercial Telecom
- Test Boxes
- Security and Defense

#### SPECIFICATIONS

TYPICAL PROPERTIES	ECCOSORB LS
Max. Service Temperature °C (°F)	90 (194)
Frequency Range	≥ 1 GHz

*Data for design engineer guidance only. Observed performance varies in application. Engineers are reminded to test the material in application.*

	Attenuation (dB/cm)		Relative Impedance ( Z /Z <sub>0</sub> )	
	3 GHz	10 GHz	3 GHz	10 GHz
LS-14	1.0	1.7	0.83	0.89
LS-16	1.5	2.3	0.78	0.87
LS-18	3.2	4.7	0.69	0.82
LS-20	4.2	7.0	0.61	0.78
LS-22	7.4	14.9	0.55	0.74
LS-24	11	24	0.25	0.44
LS-26	16	34	0.18	0.31
LS-28	20	40	0.16	0.27
LS-30	24	46	0.13	0.22

#### APPLICATIONS


- Eccosorb LS is used to lower cavity Q's in RF amplifiers, oscillators, cabinets containing microwave devices, computer housings, LNB's and isolation of antennas by insertion loss.
- Eccosorb LS is also used to reduce surface currents on radiating elements and outer ground-plane type surfaces.
- Reflectivity of an object (metal or otherwise) can be reduced somewhat by applying one or more layers of Eccosorb LS to its surface.

## AVAILABILITY

- Standard sheets are 610mm x 610mm (24"x24").
- Standard thicknesses are 3.2 mm (1/8"), 6.4 mm (1/4"), 9.5 mm (3/8"), 12.7 mm (1/2"), 19.1 mm (3/4").
- All Eccosorb LS types can be delivered in special sizes or customer specified configurations upon request. This includes die-cut and kiss cut parts to reduce installation labor by allowing quick assembly.
- Usually Eccosorb LS is supplied with a pressure sensitive adhesive.
- Upon special request, Eccosorb LS can be supplied with an anti-dust coating to prevent carbon fallout.
- It can also be supplied, upon request, with a coating to prevent moisture uptake in high humidity to moderately wet environments.

## INSTRUCTIONS FOR USE

- For optimal performance, Eccosorb LS should be bonded to a metallic surface.
- To obtain a strong bond, the surface should be thoroughly cleaned with a degreasing solvent.
- It can be securely bonded to itself or to other materials such as metal, wood and common plastic composites. Our specific Eccostock® foam adhesive is recommended or the self-adhesive version can be used.
- The material can be easily cut with a sharp knife, scissors or die.

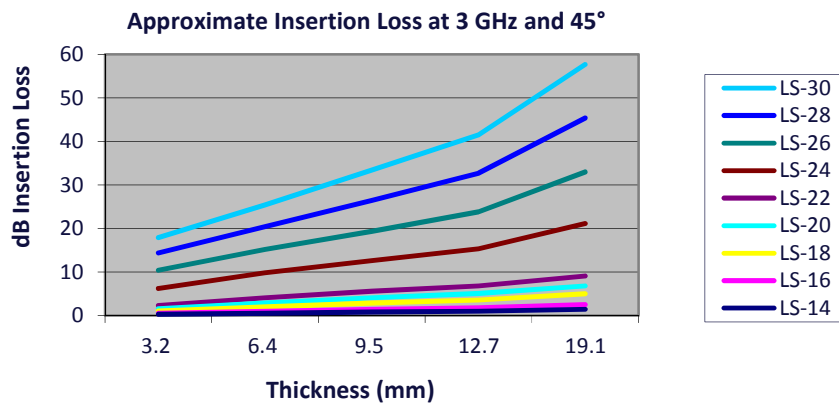

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for* [EMI Gaskets, Sheets, Absorbers & Shielding](#) *category:*

*Click to view products by* [Laird Connectivity](#) *manufacturer:*

Other Similar products are found below :

[8101010140](#) [8563-0090-89](#) [1194-7.7X10](#) [1245-34"X18YD](#) [1267](#) [1345-3/8x18yrd](#) [1554907-1](#) [2320002000](#) [2320014700](#) [SG293037DS](#)  
[ST005PCN50](#) [55005107](#) [38M4040AA0606](#) [46J5N02020.NN00](#) [1125-8X10](#) [1126X1"](#) [1170-3/4X18YDS](#) [1170-7.7x10](#) [1183-12"X18YD](#) [6-](#)  
[34T-BD-0.315](#) [SG125187D-24](#) [SG125250R-24](#) [SG187375R-24](#) [SG284050DS](#) [8402010540](#) [KIT TECH CLIP](#) [1194](#) [10-40450-28S](#) [1245](#)  
[1267-1/2"x18yd](#) [46J8501020.NN00](#) [1170-1/4"x18yd](#) [AL-36FR-1x54.5](#) [3013310A](#) [1194X1"](#) [3020604](#) [3021302](#) [3031313](#) [260709](#) [3021310](#) [6-](#)  
[34UT-070-BD-16](#) [303076048](#) [46J5N03020.NN00](#) [30206025](#) [30395641](#) [3030403](#) [3690103020](#) [HNY-LT15CU4241](#) [46X7503020.NN00](#)  
[46W5E02520.NN00](#)