



Innovative **Technology**  
for a **Connected** World

# Tflex™ 300TG Series Thermal Gap Filler



## UNIQUE SILICONE GEL OFFERS COMPLIANCY, THERMAL RESISTANCE

The high rate of compliancy of Tflex™ 300TG allows the material to “totally blanket” the component, enhancing thermal transfer. The material has a very low compression set enabling the pad to be reused many times. Tflex™ 300TG, in achieving its stellar compliancy, does not sacrifice thermal performance. With a thermal conductivity of 1.2 W/mK, low thermal resistance can be achieved at low pressures.

A Tgard™ silicone liner has been added to the Tflex™ 300TG to offer a guaranteed dielectric barrier. The Tgard™ is cut-through resistant and provides easier part handling in mass production.

## FEATURES AND BENEFITS

- Extreme compliancy allows material to “totally blanket” component(s)
- Thermal conductivity of 1.2 W/mK
- Provides a dielectric barrier
- Low compression set enables the pad to be reused many times

## APPLICATIONS

- Notebook and desktop computers
- Telecommunication hardware
- Flat panel displays
- Memory modules
- Power conversion equipment
- Set top box
- Lighting ballast
- Automotive electronics
- LED lighting
- Handheld electronics
- Optical disk drives
- Vibration dampening


## global solutions: local support.™

Americas: +1.888.246.9050  
Europe: +49.(0).8031.2460.0  
Asia: +86.755.2714.1166

CLV-customerservice@lairdtech.com  
[www.lairdtech.com/thermal](http://www.lairdtech.com/thermal)

## Tflex™ 300TG TYPICAL PROPERTIES

	Tflex™ 300TG	TEST METHOD
Construction	Filled silicone elastomer on carrier line	NA
Color	Light green	Visual
Thickness Range	0.020 - .200 in (0.5 - 5.0 mm), 0.250 in (6.4 mm)	
Thickness Tolerance	±10%	
Surface Adhesion	1 side	
Specific Gravity	1.79	ASTM D792
Hardness (Shore 00)	27	ASTM D2240
Thermal Conductivity	1.2 W/mK	ASTM D5470
Thermal Resistance, 10 psi	1.59 °C in <sup>2</sup> /W	ASTM D5470 modified
Coefficient of Thermal Expansion (CTE)	600 ppm/C	IPC-TM-650 2.4.24
Operating Temperature Range	-40°C to 160°C	
Breakdown Voltage	>10,000 VAC	ASTM D149
Flammability Rating	94V0	UL
Outgassing, TML	0.56%	ASTM E595
Outgassing, CVCM	0.10%	ASTM E595

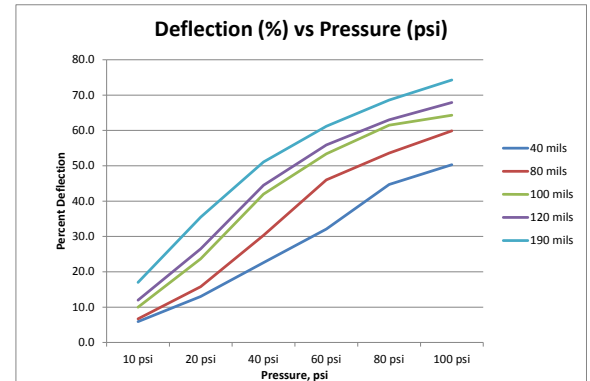

### STANDARD THICKNESSES

0.020 to 0.200 in (0.5 to 5.0 mm)\*

0.020 to 0.200 in thick material available in 0.010 inch (0.25 mm) increments

\*0.250 in (6.4 mm) thickness is available

### MATERIAL NAME AND THICKNESS

Tflex™ indicates elastomeric gap filler product line

3xxx indicates high recovery '3 series' 1.2 W/mK material

TG indicates Tgard™ liner

### EXAMPLES

Tflex™ 3120TG = 0.120 in thick material with Tgard™ liner

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Thermal Interface Products](#) category:*

*Click to view products by [Laird Connectivity](#) manufacturer:*

Other Similar products are found below :

[7721-9PPS](#) [FGN80-2](#) [PFM-172-60](#) [A-40](#) [174-9-230P](#) [9601-7](#) [5300AC](#) [1.500G](#) [08133](#) [V6622C](#) [TVQF-1225-07S](#) [TP0001](#) [4860](#) [SC80-W2](#)  
[V6516C](#) [A17713-06](#) [A17713-05](#) [A17653-05](#) [A17690-06](#) [A17775-03](#) [A17690-05](#) [A17653-02](#) [A17689-02](#) [A17690-04](#) [A17775-05](#) [A17775-](#)  
[06](#) [A17690-08](#) [A17690-02](#) [A17689-06](#) [A17653-06](#) [A17690-12](#) [A17653-03](#) [A17536-02](#) [A17689-03](#) [A17536-10](#) [A17752-13](#) [A17752-04](#)  
[A17752-07](#) [A17634-12](#) [19-36565-0001-1](#) [A17752-09](#) [22000-001A](#) [A17752-20](#) [A17752-16](#) [A17752-12](#) [A17653-04](#) [A17634-10](#) [A17634-09](#)  
[A17634-07](#) [A17633-20](#) [A17633-07](#)