

UHF Wideband Antenna

B3803W





PREMIUM MOBILE LOAD COIL ANTENNAS ARE INDUSTRY STANDARD

Laird Technologies'ongoing commitment to refinement in mechanical and electrical design has resulted in the most technically advanced mobile load coil antennas on the market. Exclusive features such as stainless steel whips, housings constructed with ABS material injected molded around a solid brass insert, and gold plated push pin contacts make Laird Technologies the obvious choice for quality and long lasting value for demanding mobile radio communications.

FEATURES **ROHS**

- High performance wide band mobile antenna
- High gain, wideband antenna does not require field tuning
- Special UV treated radome, resists sun damage
- Easy installation with optional **NMO Mounts**
- 100% tested on a network analyzer

MARKETS

- Public safety
- Transportation
- Utility

SPECIFICATIONS

ELECTRICAL			
Frequency range	380-520 MHz		
Peak gain	3 dBi		
Efficiency	High: 89%; Avg: 84%		
Azimuth bandwidth at half power	360°		
Elevation bandwidth at half power (815 MHz)	100°		
Pattern	Omnidirectional		
Maximum Power	200 Watts		
Nominal Impedance	50 Ω		
Polarization	Vertical		
VSWR	≤ 2:1		

MECHANICAL			
Antenna Height	B3803W	9.25 in (235 mm)	
	BB3803W		
	B3803WS	9.9 in (252 mm)	
	BB3803WS		
	B3803WR	0.125 :- (222)	
	BB3803WR	9.125 in (232 mm)	
Diameter		1.44 in (36.6 mm)	
Operational Temperature		-31°F to +176°F	
		(-35°C to +80°C)	
Storage Temperature		-31°F to +176°F	
		(-35°C to +80°C)	
Termination		NMO	
Mounting Information		Ground Plane Dependent	
Color		Black or Chrome	
Radome Material		ABS	

Americas: +1.847 839.6907 IAS-AmericasEastSales@lairdtech.com


Europe: +44.(0).1628.858941 IAS-EUSales@lairdtech.com Asia: +86.21.5855.0827.127 IAS-AsiaSales@lairdtech.com


www.lairdtech.com



UHF Wideband AntennaB3803W

ANTENNA PATTERNS AND VSWR CHART

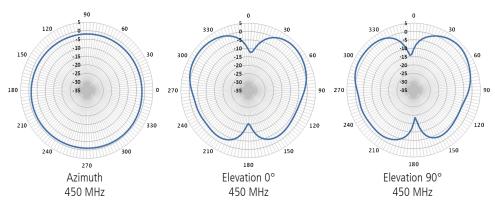

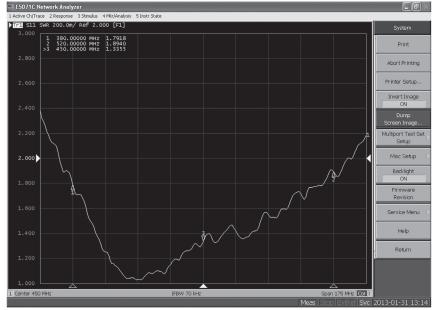

VSWR Plot (Measured on 2' x 2' GP)

ANTENNA ORDERING GUIDE				
BB3803WR = B Mobile Load Coil, Black Chrome Finish, 380-520mhz, 3 dBi Gain, Rubber Spring				
В	Antenna Style	B = B Mobile Load Coil		
В	Finish	Blank = Chrome	B = Black	
380	Frequency	Initial frequency rating component of part number		
3	Gain	3 = 3 dBi		
W				
R	Spring Option	Blank = Ferrule	S = SS Spring	R = Rubber Spring

ANT-DS-UHF-Wideband 0613

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end use; since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability or suitability of any Laird Technologies and its nor products for any specific or general uses. Laird Technologies and lair or products for any kind. All Laird Technologies and any lair development and any specific or general uses. Laird Technologies are used any kind. All Laird Technologies are to any kind. All Laird Technologies, the Laird Technologies to and other marks are trade marks or registered trade marks of Laird Technologies, Inc. and affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by Laird Connectivity manufacturer:

Other Similar products are found below:

GAN30084EU 930-033-R GW17.07.0250E 1513563-1 EXE902SM APAMPG-117 MAF94383 W3908B0100 W6102B0100 YE572113-30RSMM 108-00014-50 66089-2406 SPDA17RP918 A09-F8NF-M A09-F5NF-M RGFRA1903041A1T W3593B0100 W3921B0100 SIMNA-868 SIMNA-915 SIMNA-433 W1044 W1049B090 A75-001 WTL2449CQ1-FRSMM CPL9C EXB148BN 0600-00060 TRA9020S3PBN-001 Y4503 GD5W-28P-NF MA9-7N GD53-25 GD5W-21P-NF C37 MAF94051 MA9-5N EXD420PL B1322NR QWFTB120 MAF94271 MAF94300 GPSMB301 FG4403 AO-AGSM-OM54 5200232 MIKROE-2349 WCM.01.0111 MIKROE-2393 MIKROE-2352