



## PREMIUM MOBILE LOAD COIL ANTENNAS ARE INDUSTRY STANDARD

Lairds' ongoing commitment to refinement in mechanical and electrical design has resulted in the release of our latest product, the mobile coil antenna with an elastomer spring. The new elastomer spring provides increased flexibility, better shape retention, and eliminates electronic noise & road noise compared to stainless steel springs. The mobile coil antennas will continue to maintain all of the features that make them unique, such as stainless steel whips, housings constructed with ABS material injection molded around a solid brass insert, and gold plated push pin contacts. Together, the mobile coil antenna and elastomer spring, make Laird Technologies the obvious choice for quality and long lasting value for demanding mobile radio communications.

### ORDERING INFORMATION

Base Antenna	Antenna w/ Elastomer Spring PN	Description	Gain
B132	B132R	132 - 525 MHz Tunable Chrome, Elast Spr	Unity
	BB132R	132 - 525 MHz Tunable Black, Elast Spr	Unity
B1322N	B1322NR	132 - 174 MHz Chrome, NGP, Elast Spr	2 dBi
	BB1322NR	132 - 174 MHz Black, Elast Spr	2 dBi
B1323	B1323R	132 - 174 MHz Chrome, Elast Spr	3 dBi
	BB1323R	132 - 174 MHz Black, Elast Spr	3 dBi
B1442N	B1442NR	144 - 174 MHz Chrome, NGP, Elast Spr	2 dBi
	BB1442NR	144 - 174 MHz Black, NGP, Elast Spr	2 dBi
B1443	B1443R	144 - 174 MHz Chrome, Elast Spr	3 dBi
	BB1443R	144 - 174 MHz Black, Elast Spr	3 dBi
B4502N	B4502NR	450 - 470 MHz Chrome, NGP, Elast Spr	2 dBi
	BB4502NR	450 - 470 MHz Black, Elast Spr	2 dBi
B4503	B4503R	450 - 470 MHz Chrome, Elast Spr	3 dBi
	BB4503R	450 - 470 MHz Black, Elast Spr	3 dBi
B4505C	B4505CR	450 - 470 MHz Chrome, Elast Spr	5 dBi
	BB4505CR	450 - 470 MHz Black, Elast Spr	5 dBi
B4703	B4703R	470 - 490 MHz, Chrome, GP, 3 dBi	3 dBi
	BB4703R	470 - 490 MHz, Black, GP, 3 dBi	3 dBi
B4705C	B4705CR	470 - 490 MHz, Chrome, GP, 5 dBi	5 dBi
	BB4705CR	470 - 490 MHz, Black, GP, 5 dBi	5 dBi
B7603	B7603R	760 - 870 MHz Black, GP, Elast Spr	3 dBi
	BB7603R	760 - 870 MHz Chrome, GP, Elast Spr	3 dBi
B8065C	B8065CR	806 - 866 MHz Black, GP, Elast Spr	5 dBi
	BB8065CR	806 - 866 MHz Chrome, GP, Elast Spr	5 dBi
B8965C	B8965CR	896 - 970 MHz Chrome, Elast Spr	5 dBi
	BB8965CR	896 - 970 MHz Black, Elast Spr	5 dBi
B8965CN	B8965CNR	896 - 970 MHz Chrome, NGP, Elast Spr	5 dBi
	BB8965CNR	896 - 970 MHz Black, NGP, Elast Spr	5 dBi
Replacement Elastomer Springs	SRS-062-C-001	Replacement Rubber Spring, 0.062" Rod Diameter	
	SRS-100-C-001	Replacement Rubber Spring, 0.100" Rod Diameter	
	SRS-125-C-001	Replacement Rubber Spring, 0.125" Rod Diameter	
	SRS-MX-C-001	Replacement Rubber Spring, MX Connector	
	SRS-KR-C-001	Replacement Rubber Spring, KR Connector	

Americas: +1.847.839.6925  
IAS-AmericasEastSales@lairdtech.com

Europe: +44.(0).1628.858941  
IAS-EUSales@lairdtech.com


Asia: IAS-AsiaSales@lairdtech.com

[www.lairdtech.com](http://www.lairdtech.com)


## SPECIFICATIONS

ENVIRONMENTAL		DIMENSIONAL	
Operating Temp	-45 to 85°C	Height	65-85 mm Depends on Whip OD options
Storage Temp	-45 to 85°C	Base OD	22 mm
Wind speed survivability	100 mph+	Installation Threads	5/16--24
Cold	-45	Whip Diameter	0.100", 0.062" & 0.125" Options
Heat	85	Whip Lock	Dual Set Screw
Temperature Shock	N/A	Nut Size	23 mm hex
Humidity	85% @ 85°C	<b>MATERIALS</b>	
Rain / Ingress	N/A (IP67 targeted spec/standard)	Body Material	EPDM Rubber
Salt Fog	N/A	Ferrule Material	Chrome Plated Brass
Flammability	N/A		
Vibrations	N/A		

## VHF - STAINLESS STEEL VS. ELASTOMER SPRING

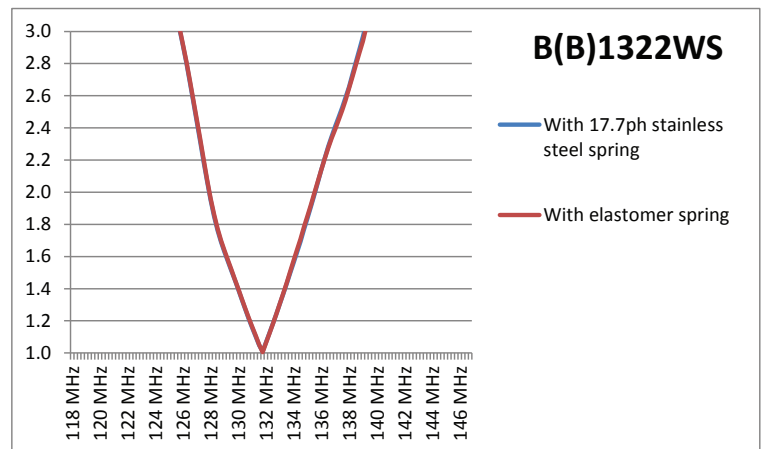

## UHF - STAINLESS STEEL VS. ELASTOMER SPRING

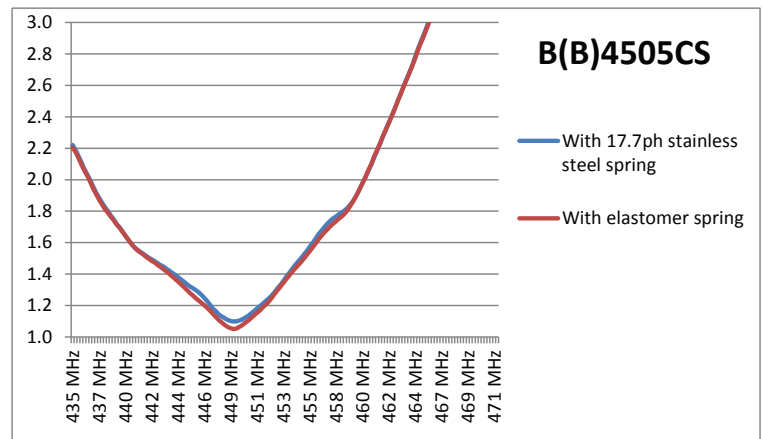

### ANT-DS-Elastomer-Spring-Packages 0616

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of Sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2016 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trademarks or registered trademarks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Antennas](#) category:*

*Click to view products by [Laird Connectivity](#) manufacturer:*

Other Similar products are found below :

[GAN30084EU](#) [930-033-R](#) [GW17.07.0250E](#) [1513563-1](#) [EXE902SM](#) [APAMPG-117](#) [MAF94383](#) [W3908B0100](#) [W6102B0100](#) [YE572113-30RSMM](#) [108-00014-50](#) [66089-2406](#) [SPDA17RP918](#) [A09-F8NF-M](#) [A09-F5NF-M](#) [RGFRA1903041A1T](#) [W3593B0100](#) [W3921B0100](#) [SIMNA-868](#) [SIMNA-915](#) [SIMNA-433](#) [W1044](#) [W1049B090](#) [A75-001](#) [WTL2449CQ1-FRSMM](#) [CPL9C](#) [EXB148BN](#) [0600-00060](#) [TRA9020S3PBN-001](#) [Y4503](#) [GD5W-28P-NF](#) [MA9-7N](#) [GD53-25](#) [GD5W-21P-NF](#) [C37](#) [MAF94051](#) [MA9-5N](#) [EXD420PL](#) [B1322NR](#) [QWFTB120](#) [MAF94271](#) [MAF94300](#) [GPSMB301](#) [FG4403](#) [AO-AGSM-OM54](#) [5200232](#) [MIKROE-2349](#) [WCM.01.0111](#) [MIKROE-2393](#) [MIKROE-2352](#)