

Base Loaded Mobile Antenna B4505CN BB4505CN B4505CNS BB4505CNS



PREMIUM BASE LOAD MOBILE ANTENNA

Lairds'ongoing commitment to refinement in mechanical and electrical design has resulted in the most technically advanced mobile load coil antennas on the market. Exclusive features such as stainless steel whips, housings constructed with ABS material injected molded around a solid brass insert, and gold plated push pin contacts make Laird Technologies the obvious choice for quality and long lasting value for demanding mobile radio communications.

FEATURES AND BENEFITS

- Long tuning ferrule allows for greater freedom in frequency adjustment without trimming
- High performance mobile antenna operates on a No Ground plane (NGP) requirement.
- Straight Stainless steel corona ball stays on the rod – no dissimilar metal interaction associated with competitor designs.
- Easy Installation /w NMO mountable.
- 100% tested on a network analyzer.

MARKETS

- Public Safety.
- Transportation.
- Utility.
- Military mobile.

FEATURES	*B4505CN**		
Frequency	450MHz – 470MHz		
Pattern	Omni – Directional		
Polarization	Vertical		
Category	Feature		
Maximum Power	100 Watts		
Gain	5 dBi		
Nominal Impedance	50Ώ		
VSWR	≤2.0:1		
Elevation Beamwidth At Half-Power	28° deg		
Azimuth Beamwidth At Half-Power	360° deg		
Termination	NMO		

MODEL	HEIGHT	WEIGHT	DIAMETER	STORAGE
B4505CN	32 ¹ / _{4 in} 82 cm	.453 lbs 205.5 gm	1.44 in 36.57 mm	-31°F to +185°F
BB4505CN	32 ¹ / _{4 in} 82 cm	.453 lbs 205.5 gm	1.44 in 36.57 mm	-31°F to +185°F
B4505CNS(R)	32 ¹ / _{4 in} 82 cm	.453 lbs 205.5 gm	1.44 in 36.57 mm	-31°F to +185°F
BB4505CNS(R)	32 ¹ / _{4 in} 82 cm	.453 lbs 205.5 gm	1.44 in 36.57 mm	-31°F to +185°F


Americas: +1.847 839.6907 IAS-AmericasEastSales@lairdtech.com

Europe: +44.1628.858941 IAS-EUSales@lairdtech.com

Asia: +86.21.5855.0827.127 IAS-AsiaSales@lairdtech.com



Base Loaded Mobile Antenna B4505CN BB4505CN B4505CNS BB4505CNS

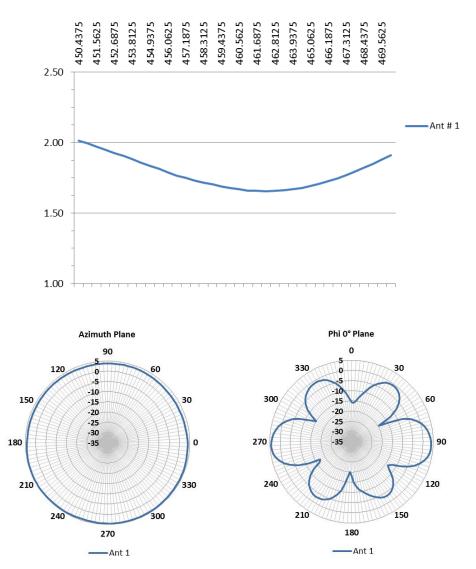

B4505CN VSWR

IAS-DS-B4505CN 1015

Any information furnished by Laird and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end user. Laird Technologies makes no awaranties as to the fitness, merchantability, suitability or noninfringement of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2015 Laird. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trademarks or registered trademarks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third party intellectual property rights.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by Laird Connectivity manufacturer:

Other Similar products are found below :

 GAN30084EU
 930-033-R
 GW17.07.0250E
 1513563-1
 EXE902SM
 APAMPG-117
 MAF94383
 W3908B0100
 W6102B0100
 YE572113

 30RSMM
 108-00014-50
 66089-2406
 SPDA17RP918
 A09-F8NF-M
 A09-F5NF-M
 RGFRA1903041A1T
 W3593B0100
 W3921B0100

 SIMNA-868
 SIMNA-915
 SIMNA-433
 W1044
 W1049B090
 A75-001
 WTL2449CQ1-FRSMM
 CPL9C
 EXB148BN
 0600-00060

 TRA9020S3PBN-001
 Y4503
 GD5W-28P-NF
 MA9-7N
 GD53-25
 GD5W-21P-NF
 C37
 MAF94051
 MA9-5N
 EXD420PL
 B1322NR

 QWFTB120
 MAF94271
 MAF94300
 GPSMB301
 FG4403
 A0-AGSM-OM54
 5200232
 MIKROE-2349
 WCM.01.0111
 MIKROE-2393

 MIKROE-2352
 MIKROE-2352
 MIKROE-2352
 MIKROE-2352
 MIKROE-2352
 MIKROE-2352
 MIKROE-2352