

### Smart Technology. Delivered.

## CFD69383P/CFD69383P1 Ultra Low Profile MIMO Ceiling Mount Antenna 698-960 MHz/1350-1550 MHz/1690-4000 MHz

# (Tile Mount)

Patent Pending CFD69383P



(Hard Ceiling Mount) Patent Pending CFD69383P1

IAS-AmericasSales@lairdtech.com Europe: +44.1628.858941 IAS-EUSales@lairdtech.com Asia: IAS-AsiaSales@lairdtech.com

Americas: +1 847 839 6925

Middle East and Africa: +44.1628.858941 IAS-MEAUSales@lairdtech.com

### 2-PORT MIMO MULTI-BAND LOW PIM CEILING MOUNTED OMNIDIRECTIONAL ANTENNA

The CFD69383P/CFD69383P1 are Low PIM, 2-Port MIMO indoor wideband omnidirectional low profile ceiling mount antennas. They are designed to provide pattern coverage that is optimized for indoor coverage requirements at 698-960 MHz, and 1690-4000 MHz for the LTE, AWS-3, WCS and CBRS/WiMAX frequency bands. The CFD69383P/CFD69383P1 are applicable for environments where aesthetics and wide angle coverage are necessary for successful wireless deployment. Their surprisingly small size and extreme low profile enables maximum mounting flexibility while maintaining desired in-building aesthetics.

### **FEATURES**

- Ultra low profile aesthetically neutral housing
- 2-port MIMO for multipath mitigation
- Mounts directly and easily to ceiling tile

# • Performance optimized using Laird proprietary optimization tools

- Supports AWS-3, WCS & CBRS 3.5 GHz bands
- CFD69383P1 for hard ceiling mount installations

### APPLICATIONS

- Small Cells
- Meeting Rooms Libraries
  - Retail Malls

• iDAS

- Offices Hotels
- Museums
- Bus Terminals & Train Stations
- Other In-Building Areas

motanations											
PARAMETER	SPECIFICATIONS										
Model	CFD69383P/CFD69383P1										
Frequency Bands, MHz	698-806	824-894	880-960	1350-1550	1690-1880	1850-1990	1910-2180	2300-2500	2500-2700	3300-3800	3800-4000
Peak Gain, dBi (Typ)	3.2	3.4	3.8	3.0	4.2	3.9	4.6	4.6	5.2	4.3	4.9
Peak Gain, dBi (Max)	3.8	3.7	4.2	5.0	4.7	4.3	6.0	5.0	5.7	5.1	5.4
VSWR, Avg	<1.4:1	<1.4:1	<1.4:1	<1.7:1	<1.7:1	<1.6:1	<1.4:1	<1.3:1	<1.7:1	<1.7:1	<1.5:1
VSWR, Max	<1.5:1	<1.5:1	<1.5:1	<2.0:1	<1.8:1	<1.8:1	<1.8:1	<1.8:1	<1.8:1	<2.0:1	<2.0:1
Isolation, dB (Avg)	> 20	> 22	> 23	>16	>16	> 18	>19	> 31	> 36	> 28	> 30
Isolation, dB (Min)	>18	>18	> 18	>13	> 15	> 15	> 15	> 25	> 28	> 25	> 25
PIM, 3rd Order, 2x20 W (Avg)	<-158 d	Bc (LTE Lo	w Band)		<-160 dBc (LTE High Band)						
PIM, 3rd Order, 2x20 W (Max)	<-150 dBc <-150 dBc										
Nominal Impedance	50Ω										
Polarization	Linear Horizontal										
Azimuth 3 dB Beamwidth	360°, Omnidirectional										
Max Power (Ambient 25°C)	50 Watts										
Antenna Dimension (H x Dia)	7.6 x 250 mm (0.3" x 9.84")										
Weight	420 g (0.93 lbs)										
Antenna Color	White										
Radome	PC, UL94-VO										
Operating Temperature	-30°C to +70°C (-22°F to +158°F)										
Storage Temperature	-40°C to +85°C (-40°F to +185°F)										
Material Substance Compliance	RoHS										

### CONFIGURATION

PART NUMBER	CABLE LENGTH	CONNECTOR	MOUNTING	PACKAGING
CFD69383P-30NF	30 cm (12")	Type N- female	Ceiling tile	Unit
CFD69383P-30D43F	30 cm (12")	4.3-10 female	Ceiling tile	Unit
CFD69383P-B30NF	30 cm (12")	Type N- female	Ceiling tile	Bulk
CFD69383P-B30D43F	30 cm (12")	4.3-10 female	Ceiling tile	Bulk
CFD69383P1-30NF	30 cm (12")	Type N- female	Hard Ceiling	Unit
CFD69383P1-30D43F	30 cm (12")	4.3-10 female	Hard Ceiling	Unit
CFD69383P1-B30NF	30 cm (12")	Type N- female	Hard Ceiling	Bulk
CFD69383P1-B30D43F	30 cm (12")	4.3-10 female	Hard Ceiling	Bulk

Laird warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations Laird will, at its option, either repair or replace any part of its products that prove defective by reason of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the Laird product is installed. Useful lifetime of the original end product may vary but is not to exceed five (5) years from the original date of the end product purchase.




www.lairdtech.com





Smart Technology. Delivered.


# CFD69383P/CFD69383P1 698-960 MHz/1350-1550 MHz/1690-4000 MHz Ultra Low Profile MIMO Ceiling Mount Antenna


### **RADIATION PATTERNS**




















1427 MHz





1710 MHz




























Smart Technology. Delivered.

# CFD69383P/CFD69383P1 698-960 MHz/1350-1550 MHz/1690-4000 MHz **Ultra Low Profile MIMO Ceiling Mount Antenna**

### **RADIATION PATTERNS**




24


210


150

180



180

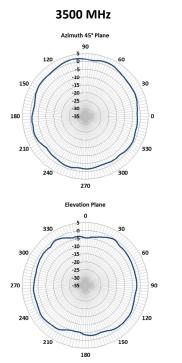



240

210

180

120

150

ANT-DS-CFD69383P 0817

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2017 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trade marks or registered trade marks of Laird Inc. Or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by Laird Connectivity manufacturer:

Other Similar products are found below :

 GAN30084EU
 930-033-R
 GW17.07.0250E
 1513563-1
 EXE902SM
 APAMPG-117
 MAF94383
 W3908B0100
 W6102B0100
 YE572113 

 30RSMM
 108-00014-50
 66089-2406
 SPDA17RP918
 A09-F8NF-M
 A09-F5NF-M
 RGFRA1903041A1T
 W3593B0100
 W3921B0100

 SIMNA-868
 SIMNA-915
 SIMNA-433
 W1044
 W1049B090
 A75-001
 WTL2449CQ1-FRSMM
 CPL9C
 EXB148BN
 0600-00060

 TRA9020S3PBN-001
 Y4503
 GD5W-28P-NF
 MA9-7N
 GD53-25
 GD5W-21P-NF
 C37
 MAF94051
 MA9-5N
 EXD420PL
 B1322NR

 QWFTB120
 MAF94271
 MAF94300
 GPSMB301
 FG4403
 A0-AGSM-OM54
 5200232
 MIKROE-2349
 WCM.01.0111
 MIKROE-2393

 MIKROE-2352
 MIKROE-2352
 MIKROE-2352
 MIKROE-2352
 MIKROE-2352
 MIKROE-2352
 MIKROE-2352