

Smart Technology. Delivered.

CFD69383P/CFD69383P1

Ultra Low Profile MIMO Ceiling Mount Antenna

698-960 MHz/1350-1550 MHz/1690-4000 MHz



(Tile Mount) Patent Pending CFD69383P



(Hard Ceiling Mount) Patent Pending CFD69383P1

2-PORT MIMO MULTI-BAND LOW PIM CEILING MOUNTED OMNIDIRECTIONAL ANTENNA

The CFD69383P/CFD69383P1 are Low PIM, 2-Port MIMO indoor wideband omnidirectional low profile ceiling mount antennas. They are designed to provide pattern coverage that is optimized for indoor coverage requirements at 698-960 MHz, and 1690-4000 MHz for the LTE, AWS-3, WCS and CBRS/WiMAX frequency bands. The CFD69383P/CFD69383P1 are applicable for environments where aesthetics and wide angle coverage are necessary for successful wireless deployment. Their surprisingly small size and extreme low profile enables maximum mounting flexibility while maintaining desired in-building aesthetics.

FEATURES

- Ultra low profile aesthetically neutral housing
- 2-port MIMO for multipath mitigation
- Mounts directly and easily to ceiling tile
- Performance optimized using Laird proprietary optimization tools
- Supports AWS-3, WCS & CBRS 3.5 GHz bands
- CFD69383P1 for hard ceiling mount installations

APPLICATIONS

- Small Cells
- iDAS
- Meeting Rooms
- Libraries • Retail Malls
- Offices Hotels

Museums

- Bus Terminals & Train Stations
- Other In-Building Areas

PARAMETER	SPECIFICATIONS										
Model	CFD69383P/CFD69383P1										
Frequency Bands, MHz	698-806	824-894	880-960	1350-1550	1690-1880	1850-1990	1910-2180	2300-2500	2500-2700	3300-3800	3800-4000
Peak Gain, dBi (Typ)	3.2	3.4	3.8	3.0	4.2	3.9	4.6	4.6	5.2	4.3	4.9
Peak Gain, dBi (Max)	3.8	3.7	4.2	5.0	4.7	4.3	6.0	5.0	5.7	5.1	5.4
VSWR, Avg	<1.4:1	<1.4:1	<1.4:1	<1.7:1	<1.7:1	<1.6:1	<1.4:1	<1.3:1	<1.7:1	<1.7:1	<1.5:1
VSWR, Max	<1.5:1	<1.5:1	<1.5:1	<2.0:1	<1.8:1	<1.8:1	<1.8:1	<1.8:1	<1.8:1	<2.0:1	<2.0:1
Isolation, dB (Avg)	> 20	> 22	> 23	> 16	> 16	> 18	> 19	>31	> 36	> 28	> 30
Isolation, dB (Min)	> 18	> 18	> 18	> 13	> 15	> 15	> 15	> 25	> 28	> 25	> 25
PIM, 3rd Order, 2x20 W (Avg)	<-158 d	Bc (LTE Lo	w Band)		<-160 dBc (LTE High Band)						
PIM, 3rd Order, 2x20 W (Max)	<-150 dBc <-150 dBc										
Nominal Impedance	50Ω										
Polarization	Linear Horizontal										
Azimuth 3 dB Beamwidth	360°, Omnidirectional										
Max Power (Ambient 25°C)	50 Watts										
Antenna Dimension (H x Dia)	7.6 x 250 mm (0.3" x 9.84")										
Weight	420 g (0.93 lbs)										
Antenna Color	White										
Radome	PC, UL94-V0										
Operating Temperature	-30°C to +70°C (-22°F to +158°F)										
Storage Temperature	-40°C to +85°C (-40°F to +185°F)										
Material Substance Compliance	RoHS										

CONFIGURATION

PART NUMB	BER CABLE LE	NGTH CONNEC	TOR MOUNTI	NG PACKAGING
CFD69383P-30N	IF 30 cm (1	12") Type N- fe	male Ceiling tile	Unit
CFD69383P-30D4	3F 30 cm (1	12") 4.3-10 fer	nale Ceiling tile	Unit
CFD69383P-B30N	IF 30 cm (1	12") Type N- fe	male Ceiling tile	Bulk
CFD69383P-B30D4	13F 30 cm (1	12") 4.3-10 fer	nale Ceiling tile	Bulk
CFD69383P1-30N	IF 30 cm (1	12") Type N- fe	male Hard Ceilin	g Unit
CFD69383P1-30D4	13F 30 cm (1	12") 4.3-10 fer	nale Hard Ceilin	g Unit
CFD69383P1-B30N	NF 30 cm (1	12") Type N- fe	nale Hard Ceilin	g Bulk
CFD69383P1-B30D4	43F 30 cm (1	12") 4.3-10 fer	nale Hard Ceilin	g Bulk

Americas: +1 847 839 6925 IAS-AmericasSales@lairdtech.com Europe: +44.1628.858941 IAS-EUSales@lairdtech.com

IAS-AsiaSales@lairdtech.com Middle East and Africa: +44.1628.858941 IAS-MFAUSales@lairdtech.com






CFD69383P/CFD69383P1

698-960 MHz/1350-1550 MHz/1690-4000 MHz Ultra Low Profile MIMO Ceiling Mount Antenna

RADIATION PATTERNS

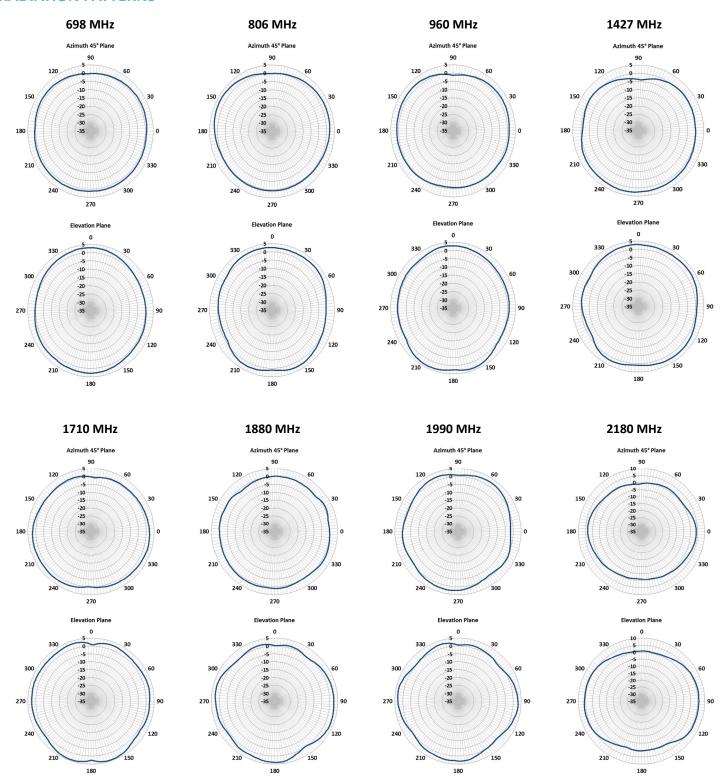




CFD69383P/CFD69383P1

698-960 MHz/1350-1550 MHz/1690-4000 MHz Ultra Low Profile MIMO Ceiling Mount Antenna

RADIATION PATTERNS

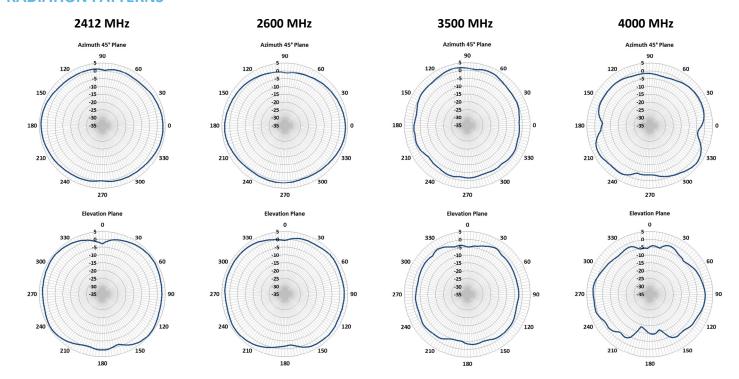

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by Laird Connectivity manufacturer:

Other Similar products are found below:

930-033-R EXE902SM APAMPG-117 108-00014-50 66089-2406 SPDA17RP918 A09-F5NF-M RGFRA1903041A1T 108-00016-050 SIMNA-868 SIMNA-915 SIMNA-433 W1049B090 TRABT1560 W3118A WTL2449CQ1-FRSMM CPL9C 0600-00060 Y4503 GD5W-28P-NF PAL90209H-FNF GD53-25 C37 MAF94051 S9025PLSMF EXD420PL B1322NR QWFTB120 MAF94300 MIKROE-2393 DA5-32RADOME BB1442NR 5200227 GPSCPMM00 ANTDOM-05-01-WPM ANT-WP868SMA-Y EXW30BNX ANTX100ETBAB24553 S4908WBFNM GD57-21 001-0016 5700028 B4305CN 108-00032-010 C27 C27S CBNC58 EXC902SM CB27 ABFT