



Smart Technology. Delivered.

896-940 MHz Unity Gain Omnidirectional Antenna

FG8960

FIBERGLASS BASE STATION ANTENNAS FEATURE INDUSTRY LEADING DESIGN COMPONENTS THAT PERFORM IN EXTREME CONDITIONS

The Laird FG8960 fiberglass omnidirectional base station antenna is a convenient and highly durable solution for base station or micro base station applications. It features superior quality design through heavy wall gold anodized aluminum mounting sleeve and a highly polished white UV treated fiberglass radome.

FEATURES

- High performance
- 100% tested on a network analyzer before shipping
- Special UV protection coating resist sun damage
- Easy installation with optional FM2SP Mount Kit
- N Female industry standard connector

MARKETS

- Omnidirectional outdoor antenna applications used in commercial, public safety, and government applications around the globe
- Typical applications include land based and marine radio and voice and data transmission



FG8960
(Shown with optional FM2SP mounting kit)

SPECIFICATIONS	
Part Number	FG8960
Frequency Range (MHz)	896 - 940 MHz
Nominal Gain	0 dBd
VSWR	<2.0:1
Maximum Power	100 watts
Nominal Impedance	50 Ohm
Polarization	Vertical
Pattern	Omni-Directional
Half-Power Beamwidth	110° x 360° (E! x Az°)
Termination	N-Female
Height	13 3/8 in (34.28 cm)
Diameter	1.31 in (3.30 cm)
Weight	0.65 lbs (0.29 kg)
Rated Wind Velocity	125 mph (210 kph)
Rated Wind Velocity w/0.5" radial ice	85 mph (137 kph)
Wind Resistance	0.1217 sq. ft.




Lightning Arrestor
LABH350NN
(Sold Separately)



Optional FM2SP
Mounting Kit
(Sold Separately)

ANTENNA RADIATION PATTERN

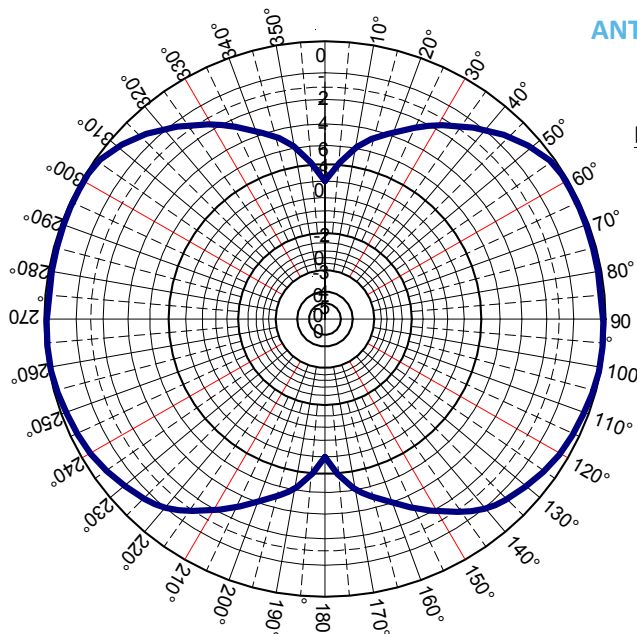

Elevation Pattern (Y, Z or H-plane)

Normalized to 0dBd

Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com

Europe: +44.1628.858941
IAS-EUSales@lairdtech.com

Asia: +86.21.5855.0827.127
IAS-AsiaSales@lairdtech.com

www.lairdtech.com

ANT-DS-FG8960

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2015 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trade marks or registered trade marks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antennas](#) category:

Click to view products by [Laird Connectivity](#) manufacturer:

Other Similar products are found below :

[GAN30084EU](#) [930-033-R](#) [GW17.07.0250E](#) [1513563-1](#) [EXE902SM](#) [APAMPG-117](#) [MAF94383](#) [W3908B0100](#) [W6102B0100](#) [YE572113-30RSMM](#) [108-00014-50](#) [66089-2406](#) [SPDA17RP918](#) [A09-F8NF-M](#) [A09-F5NF-M](#) [RGFRA1903041A1T](#) [W3593B0100](#) [W3921B0100](#) [SIMNA-868](#) [SIMNA-915](#) [SIMNA-433](#) [W1044](#) [W1049B090](#) [A75-001](#) [WTL2449CQ1-FRSMM](#) [CPL9C](#) [EXB148BN](#) [0600-00060](#) [TRA9020S3PBN-001](#) [Y4503](#) [GD5W-28P-NF](#) [MA9-7N](#) [GD53-25](#) [GD5W-21P-NF](#) [C37](#) [MAF94051](#) [MA9-5N](#) [EXD420PL](#) [B1322NR](#) [QWFTB120](#) [MAF94271](#) [MAF94300](#) [GPSMB301](#) [FG4403](#) [AO-AGSM-OM54](#) [5200232](#) [MIKROE-2349](#) [WCM.01.0111](#) [MIKROE-2393](#) [MIKROE-2352](#)