

Grid Dish Parabolic Antenna GD25



GD25: 2500 TO 2700 MHz OPERATION

The 2.5 GHz parabolic grid directional antennas offered by Laird utilize a patented parabolic grid design with a patented high-performance dipole feed. The antennas are constructed of welded steel wires which are galvanized and then powder coat painted with light gray epoxy paint. The wire grid semi-parabolic design offers unsurpassed low wind loading while maintaining good RF performance. The compact low visual impact attractive styling blends well in almost any application. Mounting is simplified with the Laird bracket system made of galvanized steel with stainless steel hardware. The antenna comes with a 30 inch LMR240 pigtail cable with choice of N male or N female connector.


FEATURES


- Designed for WiMAX and MMDS systems
- 15 dBi, 19 dBi and 24 dBi models available
- Rugged and weatherproof
- Ultra low wind loading and low visual impact
- Vertical or horizontal polarization
- Various connector choices

ANTENNA PATTERNS

MARKETS

- WiMAX applications
- Client antennas
- MMDS applications
- Point-to-point backhaul

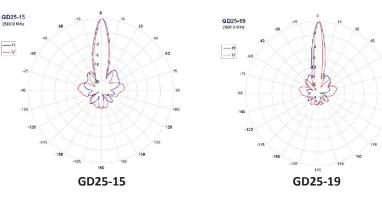



Americas: +1.847 839.6907 IAS-AmericasEastSales@lairdtech.com

Europe: +44.1628.858941 IAS-EUSales@lairdtech.com

Asia: +86.21.5855.0827.127 IAS-AsiaSales@lairdtech.com

www.lairdtech.com



Grid Dish Parabolic Antenna GD25

Smart Technology. Delivered.

SPECIFICATIONS

PARAMETER	MODEL	MIN	ТҮР	MAX	UNITS	
Frequency Range		2500		2700	MHz	
Gain	GD25-15		15		dBi	
	GD25-19		19			
	GD25-24		24			
3dB Beamwidth	GD25-15	17V, 21H			Deg	
	GD25-19	11V, 17H				
	GD25-24		8V, 10H			
Front-to-Back	GD25-15	17			dB	
	GD25-19	22				
	GD25-24	25				
VSWR			1.5:1			
Impedance			50		ohm	
Input Power				100	W	
Operating Temperature		-40		+70	Deg C	
Pole Size		1 (25)		2 (50)	in (mm)	
Weight	GD25-15		4 (1.8)			
	GD25-19		6 (2.7)		lbs (kg)	
	GD25-24		11 (5)			
Dimension (W x L)	GD25-15	12 x 16 (305 x 406)				
	GD25-19	16.5 x 24 (419 x 610) 28.5 x 36 (724			in (mm)	
	GD25-24					
Bracket Tilt		x 91	14) 15		Deg	

WIND LOADING (LBS.)

MODEL	SQ. IN	100 MPH	125 MPH	100 MPH WITH ½ in RADIAL ICE
GD25-15	40	10	15.6	48
GD25-19	79	20	31	99
GD25-24	163	41	64	257

SYSTEM ORDERING INFORMATION

GD25 -__p -____

- 15 NM (N male)
- 19 NF (N female)
- 24

NOTES

• All shipments F.O.B. Schaumburg, IL 60173

Americas: +1.847 839.6907 IAS-AmericasEastSales@lairdtech.com

Europe: +44.1628.858941 IAS-EUSales@lairdtech.com

Asia: +86.21.5855.0827.127 IAS-AsiaSales@lairdtech.com

www.lairdtech.com

ANT-DS-GD25 0115

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidential or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2015 Laird in Laird products are laird, Laird Technologies, the Laird Laird

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by Laird Connectivity manufacturer:

Other Similar products are found below :

 GAN30084EU
 930-033-R
 GW17.07.0250E
 1513563-1
 EXE902SM
 APAMPG-117
 MAF94383
 W3908B0100
 W6102B0100
 YE572113

 30RSMM
 108-00014-50
 66089-2406
 SPDA17RP918
 A09-F8NF-M
 A09-F5NF-M
 RGFRA1903041A1T
 W3593B0100
 W3921B0100

 SIMNA-868
 SIMNA-915
 SIMNA-433
 W1044
 W1049B090
 A75-001
 WTL2449CQ1-FRSMM
 CPL9C
 EXB148BN
 0600-00060

 TRA9020S3PBN-001
 Y4503
 GD5W-28P-NF
 MA9-7N
 GD53-25
 GD5W-21P-NF
 C37
 MAF94051
 MA9-5N
 EXD420PL
 B1322NR

 QWFTB120
 MAF94271
 MAF94300
 GPSMB301
 FG4403
 A0-AGSM-OM54
 5200232
 MIKROE-2349
 WCM.01.0111
 MIKROE-2393

 MIKROE-2352
 MIKROE-2352
 MIKROE-2352
 MIKROE-2352
 MIKROE-2352
 MIKROE-2352
 MIKROE-2352