

Flat Panel Directional Antenna PA24



2400-2483 MHz OPERATION FLAT PANEL DIRECTIONAL ANTENNA

The 2.4 GHz flat panel directional antennas by Laird offer high gain in a thin low profile package. The antennas are constructed of a gray color UV resistant ABS plastic radome with an aluminum backplate. The antenna can be used in horizontal or vertical polarization. The die cast aluminum or galvanized steel bracket affords +/- 45 deg up or down tilt adjustment and the stainless steel hardware assures a long service life. The PA24-13 and PA24-19 antenna can be surface mounted or pole mounted. The PA24-16 is pole mounted only. All antennas comes with an integral N female connector standard.


FEATURES **V**ROHS

- High gain / low profile
- Pole mount or surface mount
- Rugged and weatherproof
- Vertical or horizontal polarization
- Type N female connector

MARKETS

- Wireless LAN applications
- Client antennas
- 802.11b/g applications
- OEM wireless data
- WiMAX

ANTENNA PATTERNS

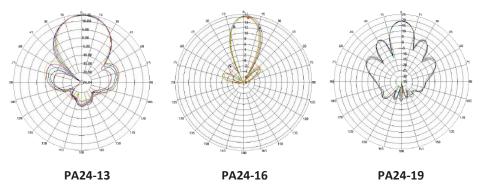

Americas: +1.847 839.6925 IAS-AmericasEastSales@lairdtech.com

Europe: +44.1628.858941 IAS-EUSales@lairdtech.com

Asia: +86.21.5855.0827.127 IAS-AsiaSales@lairdtech.com

www.lairdtech.com



Smart Technology. Delivered.

Flat Panel Directional Antenna PA24

SPECIFICATIONS

PARAMETER	PA24-13	PA24-16	PA24-19
Frequency range	2400 - 2483 MHz	2400 - 2483 MHz	2400 - 2483 MHz
Gain	13 dBi	16 dBi	19 dBi
3dB beamwidth (H & V)	35°	26°	17.5°
Front to back	20 dB	27 dB	30 dB
Cross polarization	-20 dB	-20 dB	-20 dB
VSWR	1.5:1	1.5:1	1.5:1
Impedance	50 ohm		50 ohm
Input power	100 watts		100 watts
Operating temperature	-40° to +70°C	-40° to +70°C	-40° to +70°C
Pole size	1 to 2 in (25 to 50 mm)	1 to 2 in (25 to 50 mm)	1 to 2 in (25 to 50 mm)
Weight	17.6 oz (0.5 kg)	31.5 oz (0.9 kg)	60 oz (1.7 kg)
Dimension (dia x depth)	7.5 x 7.5 x 0.8 in	11 x 11 x 0.8 in	15.3 x 14.6 x 0.8 in
	(190 x 190 x 20 mm)	(279 x 279 x 20 mm)	(389 x 368 x 20 mm)
Bracket tilt	45°	45°	45°

WIND LOADING (LBS.)

MODEL	SQ. IN	100 MPH	125 MPH	100 MPH WITH ½ IN RADIAL ICE
PA24-13	56	14 lbs	22 lbs	14 lbs
PA24-16	121	30 lbs	47 lbs	32 lbs
PA24-19	163	41 lbs	64 lbs	41 lbs

SYSTEM ORDERING

PA24-132.4 GHz 13 dBi flat panel directionalantenna PA24-162.4 GHz 16 dBi flat paneldirectional antenna PA24-192.4 GHz 19 dBi flatpanel directional antenna

NOTES

• All shipments F.O.B. Schaumburg, IL 60173

ANT-DS-PA24 1115

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be lable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. @ Copyright 2015 Laird Inc. All Rights Reserved. Laird, Laird Inchnologies, the Laird Laogo, and other marks are trademarks or registered trademarks of Laird Inc. and Rights Reserved Laird, Laird property rights.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by Laird Connectivity manufacturer:

Other Similar products are found below :

 GAN30084EU
 930-033-R
 GW17.07.0250E
 1513563-1
 EXE902SM
 APAMPG-117
 MAF94383
 W3908B0100
 W6102B0100
 YE572113

 30RSMM
 108-00014-50
 66089-2406
 SPDA17RP918
 A09-F8NF-M
 A09-F5NF-M
 RGFRA1903041A1T
 W3593B0100
 W3921B0100

 SIMNA-868
 SIMNA-915
 SIMNA-433
 W1044
 W1049B090
 A75-001
 WTL2449CQ1-FRSMM
 CPL9C
 EXB148BN
 0600-00060

 TRA9020S3PBN-001
 Y4503
 GD5W-28P-NF
 MA9-7N
 GD53-25
 GD5W-21P-NF
 C37
 MAF94051
 MA9-5N
 EXD420PL
 B1322NR

 QWFTB120
 MAF94271
 MAF94300
 GPSMB301
 FG4403
 A0-AGSM-OM54
 5200232
 MIKROE-2349
 WCM.01.0111
 MIKROE-2393

 MIKROE-2352
 MIKROE-2352
 MIKROE-2352
 MIKROE-2352
 MIKROE-2352
 MIKROE-2352
 MIKROE-2352