

#### Smart Technology. Delivered.

## 698-960 MHz/1710-2700 MHz

## LTE Vertical Low PIM Directional Panel Antenna PAV69278PO







#### LTE MULTIBAND LOW PIM DIRECTIONAL PANEL ANTENNA

The PAV69278O is a Low PIM, Multiband, high gain directional panel antenna with vertical polarization that covers the 698-960 MHz/1710-2700 MHz, LTE700/Cellular/PCS/AWS/ MDS and global GSM900/GSM1800/UMTS/LTE2600 bands. The radiation patterns are uniform and symmetrical, providing high level signal density into defined coverage zones. This antenna will greatly enhance the performance of LTE systems and is ideal for indoor or outdoor applications. The antenna includes a wall mounting bracket, anchors and bolts. The antenna can also be mast mounted with bracket adapter and clamps.

#### FEATURES RoHS

- Performance optimized using Laird proprietary RF optimization tools.
- Low PIM performance minimizes interference and improves in-building wireless network coverage and capacity.
- Mounted with standard bracket or mast mounted with bracket adapter & clamps.
- Multiple connector & coax options available.
- IP67 rated for dust, dirt & water ingress.

#### **APPLICATIONS**

- In-building or Outdoor Wireless Networks.
- Wireless Terminal, Point of Sale, and Machine to Machine.
- · Automatic meter reading.
- · Commercial and industrial security.

PARAMETER		P/	4V6927	вро :	SPECIFICAT	ONS		
Frequency Bands, MHz	698-806	824-894	880-960	1710-188	30 1850-1990	1910-2170	2300-2500	2500-2700
Peak Gain, dBi (Typ)	7.0	7.6	7.6	8.3	8.7	8.2	8.4	7.1
Peak Gain, dBi (Max)	7.6	7.8	7.8	8.8	8.8	8.8	8.7	7.8
VSWR, Typ	<1.8:1	<1.7:1	<1.7:1	<1.8:1	<1.7:1	<1.9:1	<1.7:1	<1.5:1
VSWR, Max	<2.0:1	<2.0:1	<2.0:1	<2.0:1	<2.0:1	<2.0:1	<2.0:1	<2.0:1
PIM, 3rd Order, 2 x 20W (Typ)	< -150 dBc				< -153 dBc			
PIM, 3rd Order, 2 x 20W (Max)	< -150 dBc				< -150 dBc			
Nominal Impedance	50Ω							
Polarization	Vertical							
Frequency (MHz)	698-960/1710-2700 MHz							
Azimuth 3 dB Beamwidth	75°/ 63°							
Elevation 3 dB Beamwidth	64°/ 51°							
Front-to-Back Ratio	10 dB/ 25 dB							
Max Power (Ambient 25°C)	50 Watts							
Antenna Dimension (H x Dia)	249.4 x 248.5 x 61.3 mm (9.82" x 9.8" x 2.41")							
Weight	0.62 kg (1.35 lbs)							
Antenna Color	White							
Radome	Luran ASA, UV Stable, UL 94-HB Material							
Wind Operational	160 km/h (100 mph)							
Wind Survival	220 km/h (136 mph)							
Operating Temperature	-40°C to +70°C							
Storage Temperature	-40°C to +85°C							
Ingression Protection	IP67							
Material Substance Compliance	RoHS							

Americas: +1.847 839.6925

IAS-Americas East Sales@lair dtech.com

Europe: +44.1628.858941 IAS-EUSales@lairdtech.com Asia: +86.21.5855.0827.127 IAS-AsiaSales@lairdtech.com

www.lairdtech.com







Smart Technology. Delivered.

# 698-960 MHz/1710-2700 MHz LTE Vertical Standard Directional Panel

## LTE Vertical Standard Directional Panel Antenna PAV69278PO

#### **CONFIGURATION**

#### **PART NUMBER**

PAV69278PO-30NF PAV69278PO-30D43F PAV69278PO-FNF

#### **CABLE LENGTH**

30 cm (12") 30 cm (12") N/A

#### **CONNECTOR**

Type N- female 4.3-10 DIN female Fixed N- female


# For Wall Mounting These hooks face upward This face to wall the towall to wall to wal

#### **RADIATION PATTERNS**


#### **Radiation Pattern at 698 MHz**

#### 


#### **Radiation Pattern at 824 MHz**

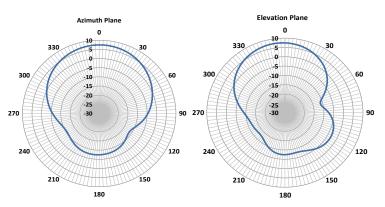

#### **Radiation Pattern at 960 MHz**

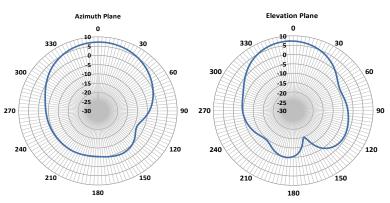

#### Radiation Pattern at 1710 MHz

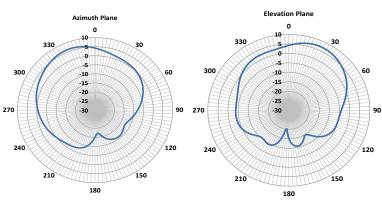




Smart Technology. Delivered.


## 698-960 MHz/1710-2700 MHz

# LTE Vertical Standard Directional Panel Antenna PAV69278PO

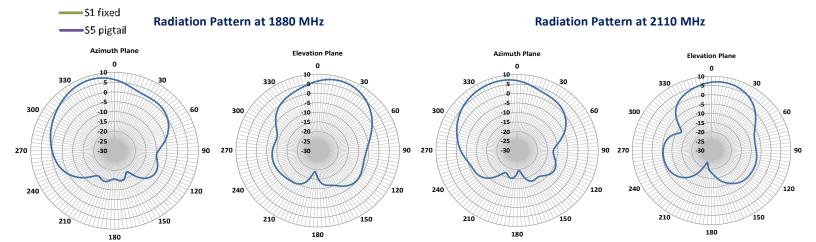


#### **Radiation Pattern at 2305 MHz**

#### **Radiation Pattern at 2412 MHz**

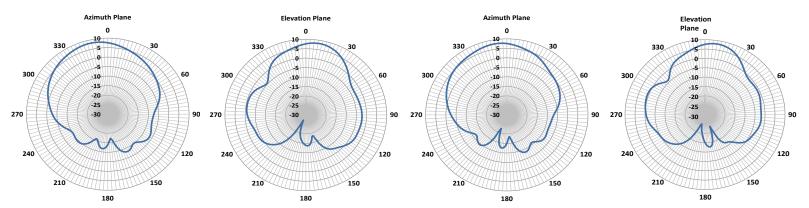

#### **Radiation Pattern at 2700 MHz**

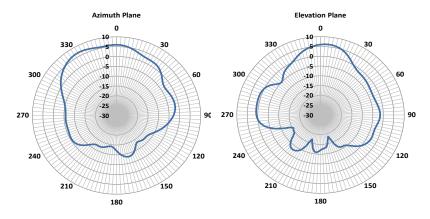

#### ANT-DS-PAV69278PO\_012016

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2016 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trade marks or registered trade marks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.

### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by Laird Connectivity manufacturer:

Other Similar products are found below:

GAN30084EU 930-033-R GW17.07.0250E 1513563-1 EXE902SM APAMPG-117 MAF94383 W3908B0100 W6102B0100 YE572113-30RSMM 108-00014-50 66089-2406 SPDA17RP918 A09-F8NF-M A09-F5NF-M RGFRA1903041A1T W3593B0100 W3921B0100 SIMNA-868 SIMNA-915 SIMNA-433 W1044 W1049B090 A75-001 WTL2449CQ1-FRSMM CPL9C EXB148BN 0600-00060 TRA9020S3PBN-001 Y4503 GD5W-28P-NF MA9-7N GD53-25 GD5W-21P-NF C37 MAF94051 MA9-5N EXD420PL B1322NR QWFTB120 MAF94271 MAF94300 GPSMB301 FG4403 AO-AGSM-OM54 5200232 MIKROE-2349 WCM.01.0111 MIKROE-2393 MIKROE-2352