



The Barracuda UHF VFH69383B22JU multiport/multiband antenna provides an excellent solution for Public Safety, Transportation and Aftermarket Fleet applications. Configured for UHF band operation, two-port MIMO operation over the 3G/4G/ISM/CBRS bands and two-port MIMO operation over the low/high frequency Wi-Fi bands. An additional sixth port provides an active antenna for enabling GNSS global navigation services.

FEATURES AND BENEFITS

- One single-hole mount/fixing- reduces vehicle damage and the cost of installation
- Attractive IP67 low profile aerodynamic housing
- Multiband/MIMO operation with GNSS navigation

APPLICATIONS

- FirstNet/Public Safety
- Transportation
- Aftermarket fleet
- 5G ready
- Rugged LTE Gateways
- Others

ELECTRICAL SPECIFICATIONS							
Antenna Model	VFH69383B22JU-518J						
Number of Ports	6						
Port Configuration	1x- UHF	2x- 3G/4G/ISM/CBRS				2x- Wi-Fi	
Operating Frequency (MHz)	380- 520	698-806	824-894	880-960	1690-3800	2400-2500	4900-6000
Peak Gain* – Avg (dBi)	0.8	0.0	0.2	0.7	3.9	2.5	6.5
Peak Gain* – Max (dBi)	2.3	1.5	1.5	2.1	7.4	3.5	7.6
VSWR – Avg	1.4:1	1.6:1	1.5:1	1.5:1	1.2:1	1.2:1	1.2:1
VSWR – Max	2.0:1	2.0:1				2.0:1	
Isolation LTE 1 to LTE 2 (dB)	-26	-17	-17	-17	-22	-31	-42
Isolation LTE 1 to WIFI 1 (dB)	-38	-38	-37	-38	-21	-21	-42
Isolation LTE 1 to WIFI 2 (dB)	-46	-40	-44	-42	-19	-19	-42
Isolation LTE 2 to WFI 1 (dB)	-44	-39	-44	-42	-21	-21	-43
Isolation LTE 2 to WIFI 2 (dB)	-39	-38	-36	-35	-19	-19	-41
Isolation WIFI 1 to WIFI 2 (dB)	-59	-58	-59	-57	-36	-36	-45
Isolation LTE 1 to UHF (dB)	-22	-18	-20	-21	-24	-26	-47
Isolation LTE 2 to UHF (dB)	-20	-18	-19	-20	-23	-26	-45
Isolation WIFI 1 to UHF (dB)	-47	-47	-51	-46	-34	-34	-45
Isolation WIFI 2 to UHF (dB)	-45	-47	-46	-40	-28	-28	-42
Isolation (**) GNSS to LTE 1 (dB)	-43	-41	-43	-44	-36	-40	-44
Isolation (**) GNSS to LTE 2 (dB)	-44	-44	-45	-45	-36	-41	-42
Isolation (**) GNSS to WIFI 1 (dB)	-71	-68	-70	-69	-31	-35	-39
Isolation (**) GNSS to WIFI 2 (dB)	-77	-71	-71	-71	-32	-36	-41
Isolation (**) GNSS to UHF (dB)	-61	-55	-57	-56	-40	-49	-52
Azimuth Plane 3 dB Beamwidth	360°, Omnidirectional						
Nominal Impedance (Ohms)	50						
Polarization	Vertical						
Max Power - Ambient 25°C (W)	10						

MECHANICAL SPECIFICATIONS	
Dimensions – L x W x H – mm (inches)	179 x 63 x 48 (7.04 x 2.48 x 1.69)
Weight – kg (lbs.)	0.72 (1.6)
Cable Type and Length – cm (ft.)	LMR-100 (Black), 518 (17)
Connector	SMA, Male
Mounting	P-Mount
Radome Material	PC, UL94-V0
Baseplate Material	Aluminum

ENVIRONMENTAL SPECIFICATIONS	
Operating Environment	Outdoor Vehicle
Operating Temperature – °C (°F)	-30 to +70°C (-22 to +158°F)
Storage Temperature – °C (°F)	-40 to +85°C (-40 to +185°F)
Ingress Protection Rating	IP67
Material Substance Compliance	RoHS

*Measures on a 1 ft circular ground plane

**Measured on a 1 ft circular ground plane with 17ft of coaxial cable

GNSS ANTENNA SPECIFICATIONS


Frequency of Operation (MHz)	1559 - 1606		
Band	BEIDOU	GPS	GLONASS
Frequency Band (MHz)	1559.052 - 1563.144	1574.42 - 1576.42	1598.0625 - 1605.89
Absolute Gain (dBi)	3	3	3
LNA Gain, Typ. @ room temp. (dBi)	26	27	26
Noise Figure @ room temp., Max (dB)	3.0	2.5	2.8
Max VSWR @ room temp.	2:1	2:1	2:1
Polarization	RHCP		
Nominal Impedance (Ohms)	50		
DC Voltage (Vdc)	3.3		
Operating Supply Voltage (Vdc)	2.5 - 7.0		
Current Consumption, Max @ room temp (mA)	20		
Out-of-band Signal Rejection Min @ room temp (dBc)	60 (@1-1525 MHz)	60 (@1675-2000 MHz)	50 (@2000-3000 MHz)
Input Max Power (dBm)	-30		
Cable Type	RG174		

CONFIGURATION

PART NUMBER	CABLE LENGTH	CONNECTOR - LTE PORTS	CONNECTOR - WIFI PORTS	CONNECTOR- UHF PORT	CONNECTOR - GNSS PORT
VFH69383B22JU-518J	5.18 m (17.0 ft.)	SMA- male	SMA- male	SMA- male	SMA- male
VFH69383B22JU-518M	5.18 m (17.0 ft.)	SMA- male	SMA- male	QMA- male	SMA- male

PACKAGING INFORMATION


PACKAGED DIMENSIONS	CARTON	MASTER CARTON	AIR PALLET	OCEAN PALLET
Number of Antennas	1	8	192	240
Height – mm (in.)	135 (5.31)	295 (11.6)	1350 (53.15)	1650 (64.96)
Length – mm (in.)	245 (9.65)	520 (20.5)	1200 (47.24)	1200 (47.24)
Width – mm (in.)	120 (47.2)	260 (10.2)	800 (31.5)	800 (31.5)
Shipping Weight – kg (lb.)	0.85 (1.9)	7.5 (16)	198 (436)	245 (540)

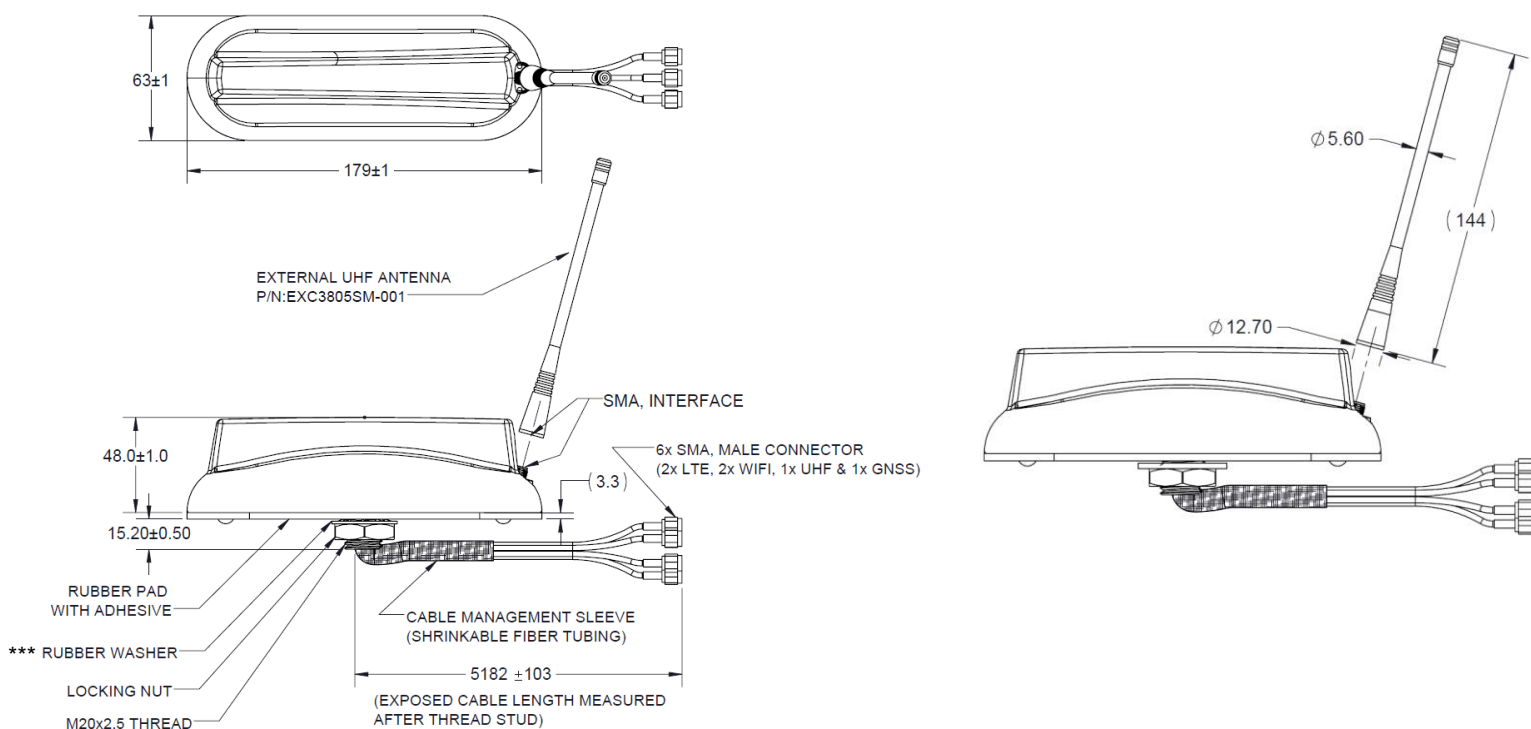

*** The rubber washer is required to achieve optimal performance for UHF.

RADIATION PATTERNS - LTE ANTENNAS


— LTE 1 — LTE 2

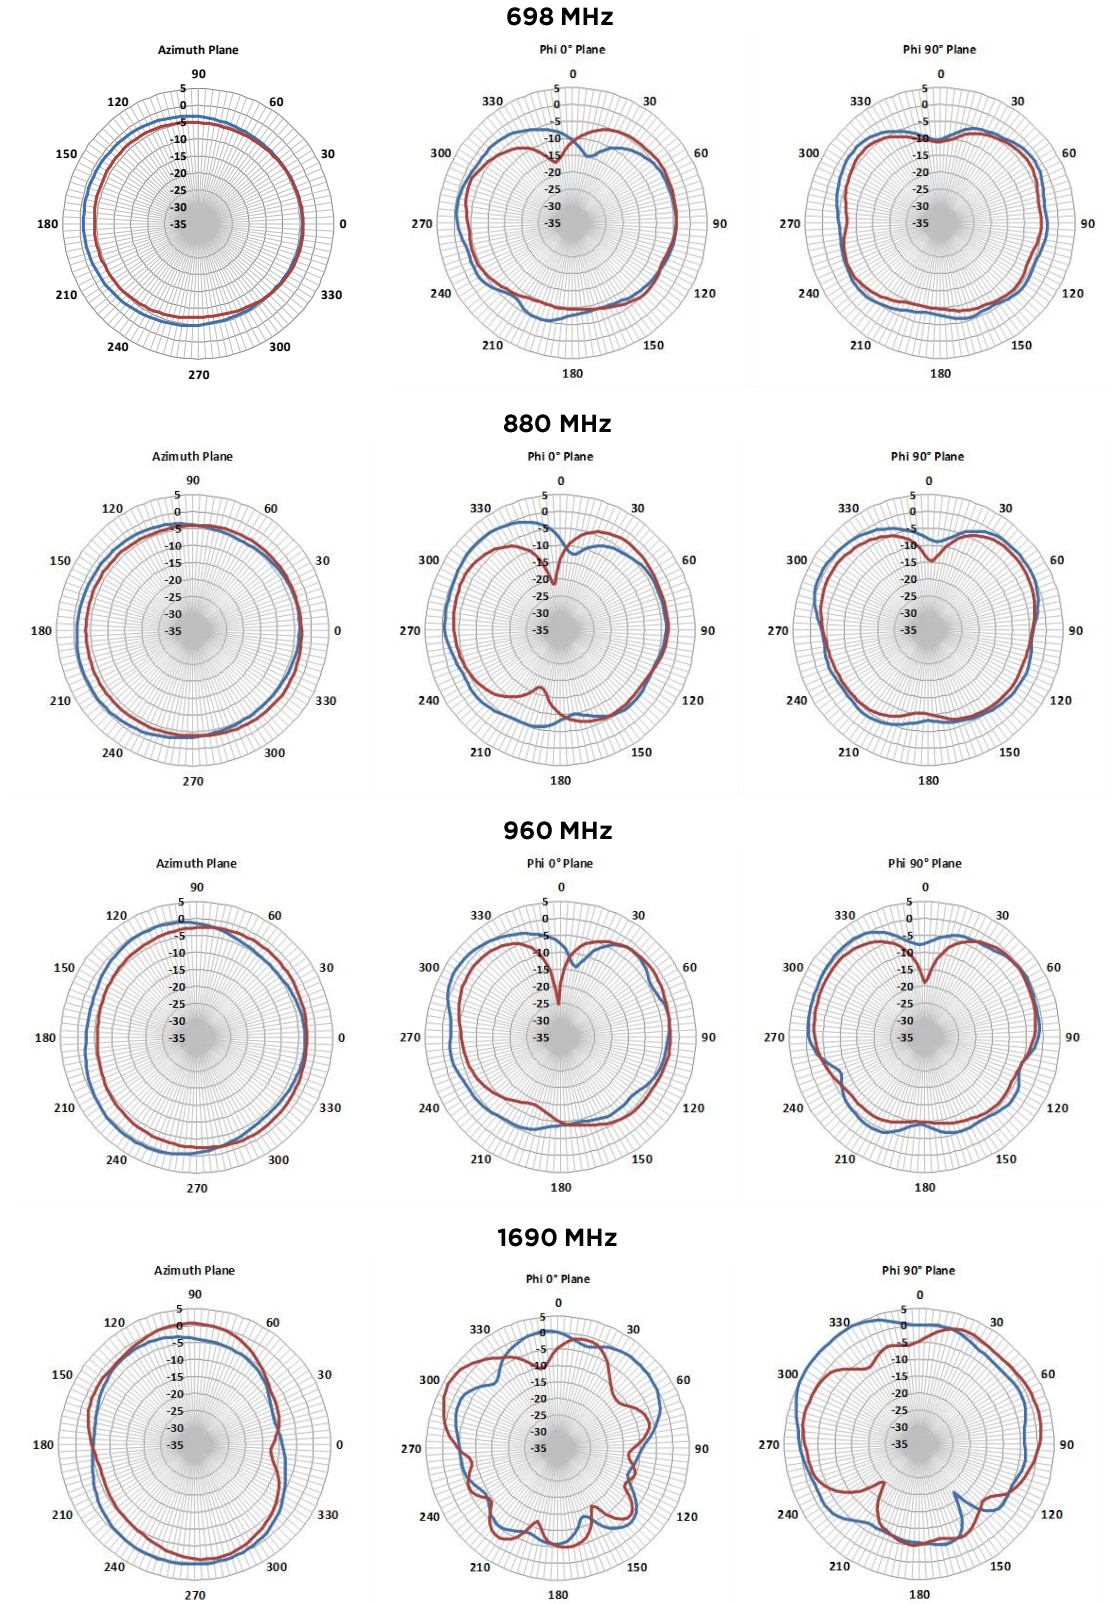


RADIATION PATTERNS - LTE ANTENNAS

— LTE 1 — LTE 2


1850 MHz

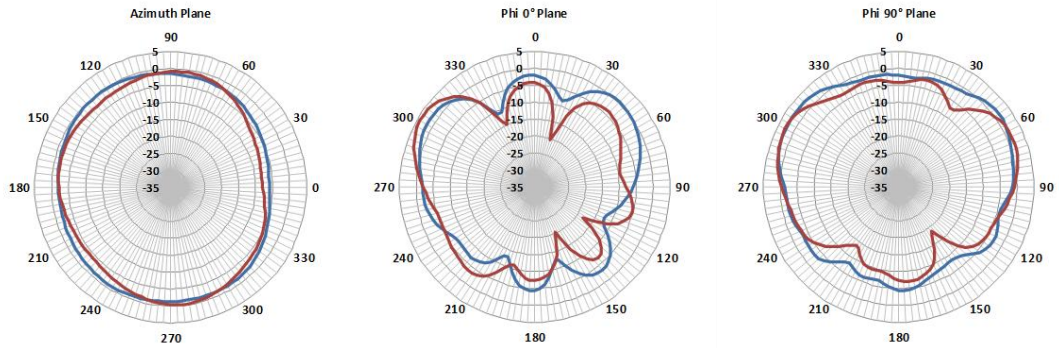


2170 MHz

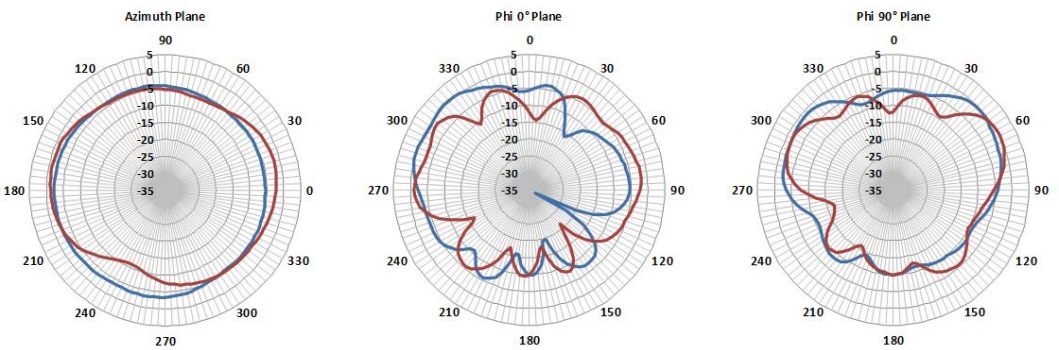

2700 MHz

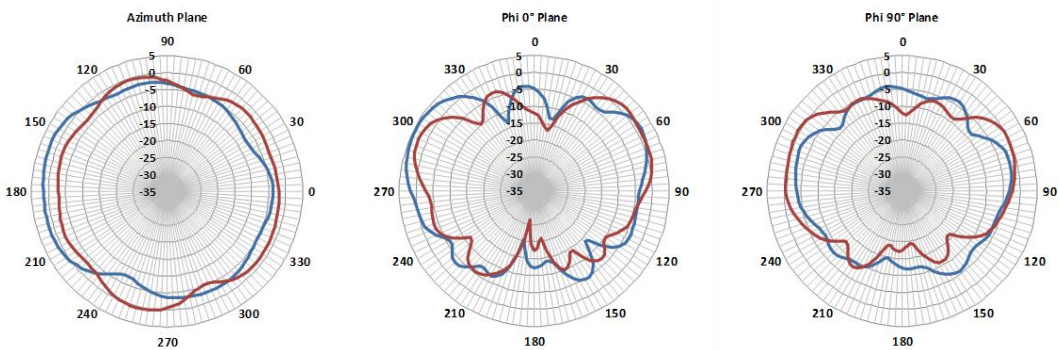


3800 MHz

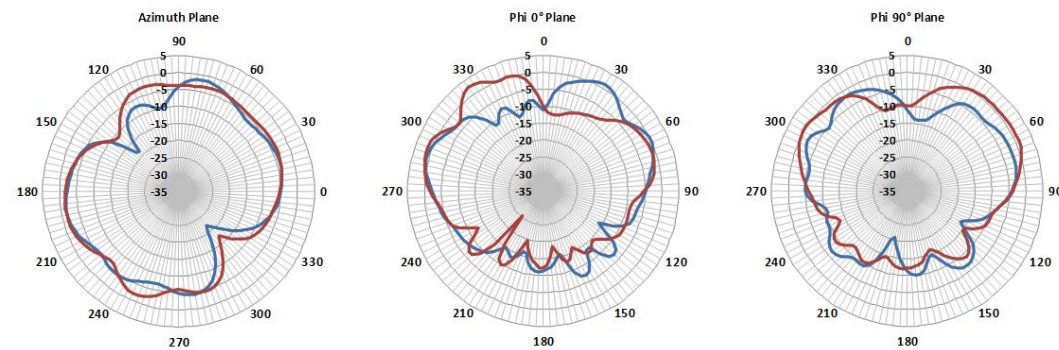


RADIATION PATTERNS - WI-FI ANTENNAS

— WIFI 1 — WIFI 2

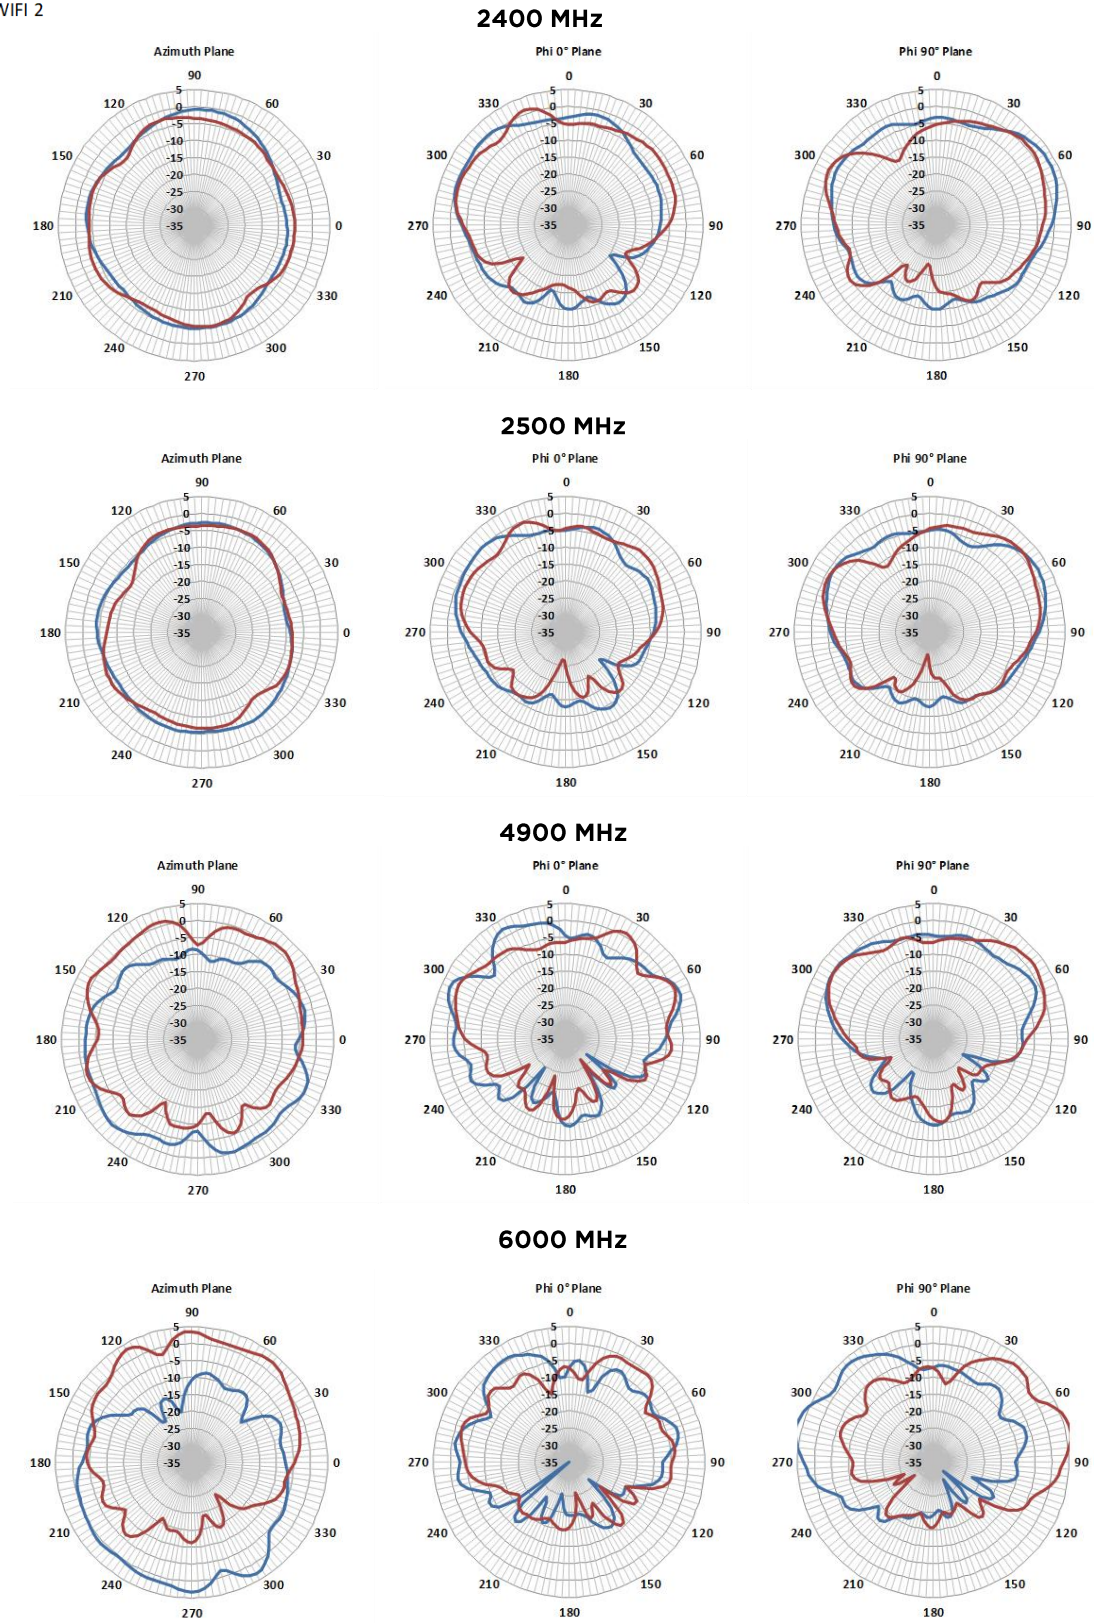


RADIATION PATTERNS - UHF ANTENNA


380 MHz

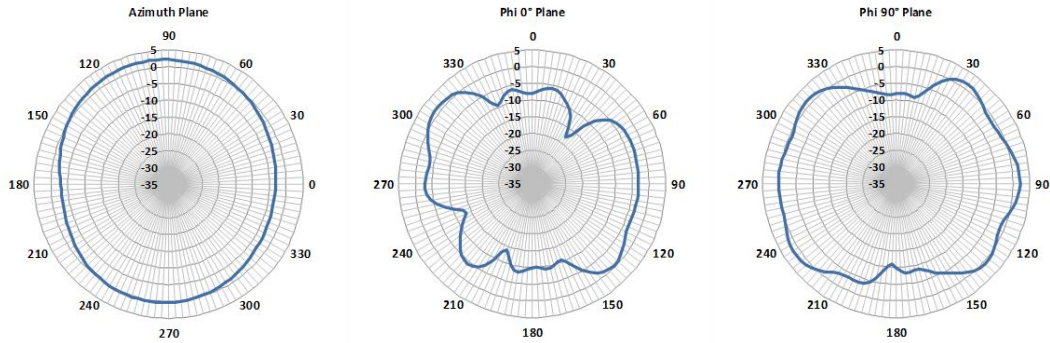


420 MHz

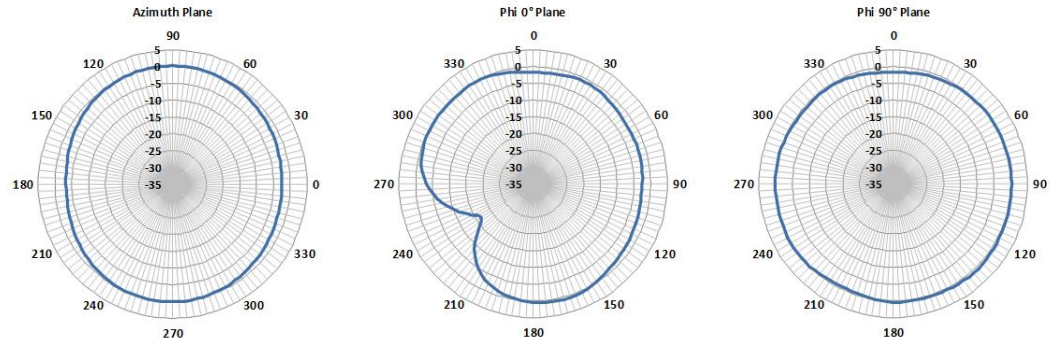

480 MHz

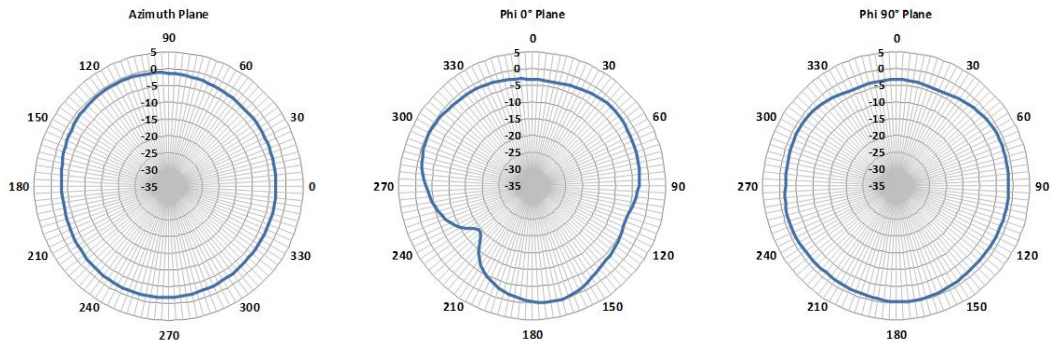

520 MHz

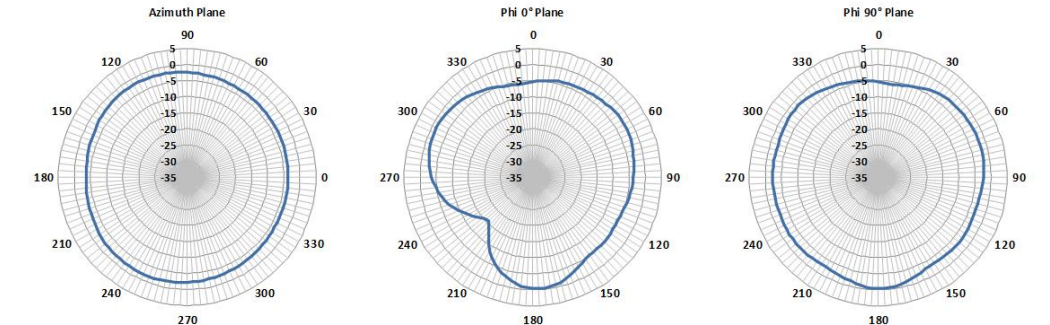

Laird warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations Laird will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the Laird product is installed. Useful lifetime of the original end product may vary but is not to exceed five (5) years from the original date of the end product purchase.

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request.

© Copyright 2019 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trademarks or registered trademarks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.

sales@lairdconnect.com
support@lairdconnect.com
www.lairdconnect.com



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antennas](#) category:

Click to view products by [Laird Connectivity](#) manufacturer:

Other Similar products are found below :

[GAN30084EU](#) [930-033-R](#) [GW17.07.0250E](#) [1513563-1](#) [EXE902SM](#) [APAMPG-117](#) [MAF94383](#) [W3908B0100](#) [W6102B0100](#) [YE572113-30RSMM](#) [108-00014-50](#) [66089-2406](#) [SPDA17RP918](#) [A09-F8NF-M](#) [A09-F5NF-M](#) [RGFRA1903041A1T](#) [W3593B0100](#) [W3921B0100](#) [SIMNA-868](#) [SIMNA-915](#) [SIMNA-433](#) [W1044](#) [W1049B090](#) [A75-001](#) [WTL2449CQ1-FRSMM](#) [CPL9C](#) [EXB148BN](#) [0600-00060](#) [TRA9020S3PBN-001](#) [Y4503](#) [GD5W-28P-NF](#) [MA9-7N](#) [GD53-25](#) [GD5W-21P-NF](#) [C37](#) [MAF94051](#) [MA9-5N](#) [EXD420PL](#) [B1322NR](#) [QWFTB120](#) [MAF94271](#) [MAF94300](#) [GPSMB301](#) [FG4403](#) [AO-AGSM-OM54](#) [5200232](#) [MIKROE-2349](#) [WCM.01.0111](#) [MIKROE-2393](#) [MIKROE-2352](#)