

NI/CU POLYESTER CONDUCTIVE FABRIC TAPE

Laird Technologies' Conductive Fabric Tape 86749 offers exceptional conformability and conductivity for dynamic flex applications. It is constructed of nickel/copper metallized fabric with a conductive pressure sensitive adhesive (PSA). This reliable tape design provides outstanding shielding performance while offering superior abrasion and corrosion resistance under high dynamic flex conditions. The 86749 is a halogen free product and can be supplied in tape or further customized to application by die-cutting or hole punching.

FEATURES

- RoHS compliant
- Halogen-free per IEC-61249-2-21 standard
- Low surface resistivity of $< 0.06 \Omega/\square$ provides excellent conductivity
- Shielding effectiveness of >62 dB across a wide spectrum of frequencies

MARKETS

- Cabinet applications
- LCD and Plasma TV
- Medical equipment
- Servers
- Printers
- Laptop computers



global solutions: local support™

USA: +1.866.928.8181


Europe: +49.0.8031.2460.0

Asia: +86.755.2714.1166

Item	Unit	Value	Test Method	
Thickness	mm	0.060 mm ± 0.01	-	
Peel Adhesion	Kgf / 25 mm	>0.8	PSTC 101*	
Shear Adhesion				
	at R.T.	Hrs	>72	PSTC 107#
	at 80°C	Hrs	>5	PSTC 107#
Tensile Strength	Kgf / 25 mm	>7		
Operation Temperature	°C	0-80		
Surface Resistivity (Fabric Side)	Ω/□	<0.06	ASTM F390	
Z-axial Resistance	Ω	<0.04		
Shielding Effectiveness*			ASTM D4935	
	at 100 MHz	dB	62	
	at 1GHz	dB	68	
Package Dimensions (Max. Width: 1000 mm)	M	W: Dimension by Customer Spec L: Standard Length of 20 M		
Shelf Life (Under 23°C/65% R.H.)		Six Months		

*:Test Method A, dwell time 30 min. #:Contact area 25 mm by 25 mm +:Typical value

COMPOSITION OF PRODUCT

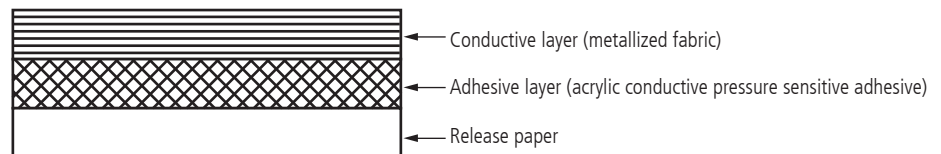

APPLICATION TECHNIQUES

- Bond strength is dependent upon the amount of adhesive-to-surface contact developed. Firm application pressure develops better adhesive contact & thus improves bond strength.
- To obtain optimum adhesion, the bonding surfaces must be clean, dry and well unified. A typical surface cleaning solvent is isopropyl alcohol. Use proper safety precautions for handling solvents.
- Ideal tape application temperature range is 21°C to 38°C. Initial tape application to surfaces at temperatures below 10°C is not recommended because the adhesive becomes too firm to adhere readily. However, once properly applied, low temperature holding is generally satisfactory.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Adhesive Tapes](#) category:

Click to view products by [Laird Performance Materials](#) manufacturer:

Other Similar products are found below :

[PF24.0W](#) [4718](#) [4516-1/4x36](#) [56-YELLOW-34"X72YD](#) [00-021200-13972-7](#) [021200-64630](#) [60 TAPE \(1"\)](#) [62-GRAY-1"X36YD](#) [69-1"X36YD](#) [764-1"x36yd-Red](#) [764-1"x36yd-White](#) [PG ASSY](#) [926-1/4X18YD](#) [967454-1](#) [1194-14"X36YD](#) [1181 19MM X 16,5 METERS](#) [1182-7.7X10](#) [1245-34"X18YD](#) [1267](#) [130C-1X15FT](#) [130-1x10FT](#) [1345-3/8x18yrd](#) [1380-2"X8"](#) [E39-RS1-CA](#) [1900-48mm](#) [22-1/2X36YD](#) [2229-P-2-1/2x3-3/4](#) [88-SUPER-34X44FT](#) [890103N001](#) [2670](#) [EVK-TA-TM047NBH01](#) [20-1"X60YDS](#) [2020-18mmx55m](#) [H150](#) [3900-Blue](#) [3939-24mmx55m](#) [396-1"x36yd](#) [4016-34"x36yd](#) [4462W-12"x72yd](#) [44-TAN-14"X90YD](#) [4504-34x18](#) [471-Trans-1"x36yd-Bulk](#) [5414 34X36](#) [C-22](#) [35-Gray-1/2](#) [371-Tan-48mmx50m](#) [4008-12"X36YD](#) [4104-34"x18yd](#) [444-1"x36yd](#) [4466 1"](#)