


Tflex™ SF800 Series Silicone Free Thermal Gap Filler



PRODUCT DESCRIPTION

Tflex™ SF800 is a high-performance, compliant, silicone free thermal interface material. By coupling extremely high thermal conductivity with exceptional wetting characteristics, Tflex™ SF800 provides some of the lowest thermal resistance values in the industry. This makes it well-suited for applications where silicone based pads are traditionally used as well as those applications which are silicone sensitive.

Tflex™ SF800 is naturally tacky on both sides requiring no additional adhesive coating, which would inhibit thermal performance. The natural tack allows for the pad to be held in place during assembly.

FEATURES AND BENEFITS

- Silicone-free gap filler
- Thermal Conductivity of 7.8 W/mK
- Exceptionally low thermal resistance
- Environmentally friendly solution that meets regulatory requirements including RoHS and REACH

SPECIFICATIONS


PROPERTIES	TYPICAL VALUE	TEST METHOD
Construction & Composition	Ceramic filled silicone free sheet	N/A
Color	Grey	Visual
Thickness Range	0.50mm (0.020") 4.0mm (0.16")	N/A
Thermal Conductivity (W/mK)	7.8	ASTM D5470
Density (g/cc)	3.21	Helium Pycnometer
Hardness (Shore 00)	81	ASTM D2240
Weight Loss over time @ 120°C, 168 hrs (%)	< 0.2	TGA
Temperature Range	-25°C to 120°C	Laird Test Method
Rth@ 40 mils, 10 psi	0.237 °C-in2/W	ASTM D5470 (Modified)
Dielectric Constant @ 1 MHz	16	ASTM D150
UL Flammability Rating	V-0	UL 94
Volume Resistivity	5 x 10 ¹² ohm-cm	ASTM D257


Americas: +1.866.928.8181 Europe: +49.(0).8031.2460.0 Asia: +86.755.2714.1166

www.lairdtech.com



Tflex™ SF800 Series Silicone Free Thermal Gap Filler

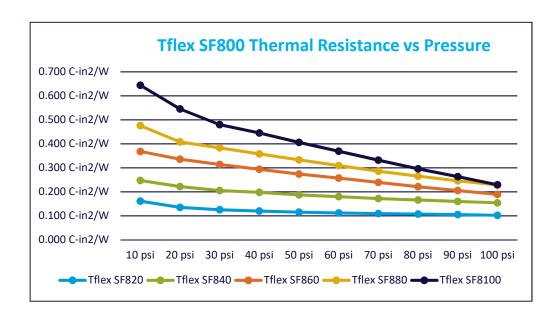

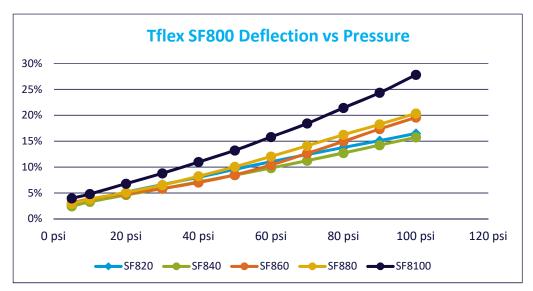

AVAILABILITY

STANDARD THICKNESSES

- 0.5mm (0.020") to 4.0mm (0.160") thick material available in 0.25mm (0.010") increments
- Available in standard sheet sizes of 9" x 9" or custom die cut parts

PART NUMBER SYSTEM

Tflex™ indicates Laird elastomeric thermal gap filler product line. SF8xxx indicates Tflex SF800 product line with thickness in mils (0.001") EXAMPLES:

• Tflex™ SF840 = 0.040" thick Tflex™ SF800 material

Tflex SF800 DS 041519

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies (products are sold pursuant to the Laird Technologies) are sold pursuant to the Laird Technologies (products are sold pursuant to the Laird Technologies). The Laird Technologies (products are sold pursuant to the Laird Technologies). The Laird Technologies (product) are sold pursuant to the La

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Thermal Interface Products category:

Click to view products by Laird Performance Materials manufacturer:

Other Similar products are found below:

7721-9PPS FGN80-2 PFM-172-60 A-40 174-9-230P 9601-7 5300AC 1.500G 08133 V6622C TVQF-1225-07S TP0001 4860 SC80-W2 V6516C A17713-06 A17713-05 A17653-05 A17690-06 A17775-03 A17690-05 A17653-02 A17689-02 A17690-04 A17775-05 A17775-06 A17690-08 A17690-02 A17689-06 A17653-06 A17690-12 A17653-03 A17536-02 A17689-03 A17536-10 A17752-13 A17752-04 A17752-07 A17634-12 19-36565-0001-1 A17752-09 22000-001A A17752-20 A17752-16 A17752-12 A17653-04 A17634-10 A17634-09 A17634-07 A17633-20 A17633-07