

HiTemp ET Series ET4,7,F1,2323

Thermoelectric Modules



The HiTemp ET Series of Thermoelectric Modules (TEMs) are designed to operate in high temperature environments.

This product line is available in multiple configurations and is ideal for applications that operate in temperatures above 80°C. Assembled with Bismuth Telluride semiconductor material, thermally conductive Aluminum Oxide ceramics and high temp solder construction, the ET Series is designed for higher current and larger heat-pumping applications.

FEATURES

- High-temperature operation
- Reliable solid state
- No sound or vibration
- Environmentally-friendly
- RoHS-compliant

APPLICATIONS

- Automotive cooling
- Telecom cooling
- Outdoor environments
- Medical heating/cooling

TECHNICAL SPECIFICATIONS					
Hot Side Temperature (°C)	85	110			
Qmax (W)	22.8	23.4			
Delta Tmax (°C)	87	94			
Imax (Amps)	3.9	3.9			
Vmax (Volts)	10.4	11.3			
Module Resistance (Ohms)	2.47	2.73			


SUFFIX	THICKNESS (PRIOR TO THINNING)	FLATNESS & PARALLELISM	HOT FACE	COLD FACE	LEAD LENGTH
TA	0.126" ±0.010"	0.001"/0.001"	Lapped	Lapped	4.5"
ТВ	0.126" ±0.0005"	0.0005"/0.0005"	Lapped	Lapped	4.5"


SEALING OPTIONS


SUFFIX	SEALANT	COLOR	TEMPERATURE RANGE	DESCRIPTION
RT	RTV	Clear	-60 to +204 °C	Non-corrosive, silicone adhesive
EP	Ероху	Black	-55 to +150 °C	Low density syntactic foam epoxy encapsulant




PERFORMANCE CURVES AT Th = 85° C

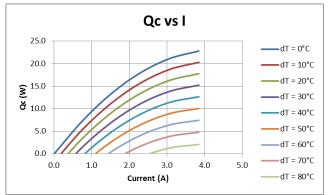


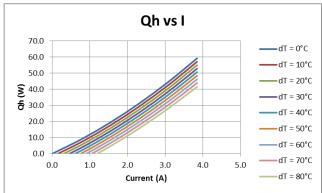

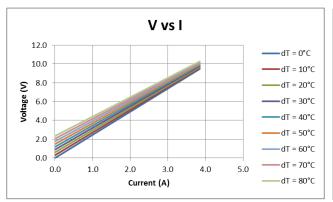

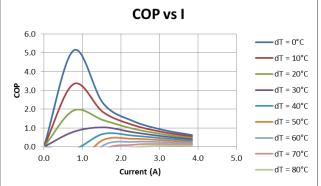

MECHANICAL DRAWING

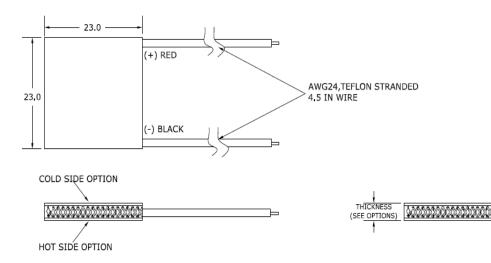

NOTES:

- Maximum Operating Temperature: 150°C
- Do not exceed Imax or Vmax when operating module
- Reference assembly guidelines for recommended installation

Ceramic Material: Alumina(Al2O3) Solder Construction: 232°C SbSn

✓RoHS

Americas: +1.919.597.7300 Europe: +46.31.420530 Asia: +86.755.2714.1166 ets.sales@lairdtech.com www.lairdtech.com Laird warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations Laird will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the Laird product is installed. Useful lifetime of the original end product may vary but is not to exceed five (5) years from the original date of the end product purchase.



Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability or suitability of suitability

© Copyright 2018 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trademarks or registered trademarks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Thermoelectric Peltier Modules category:

Click to view products by Laird Thermal Systems manufacturer:

Other Similar products are found below:

C3100-1980 C3200-0504 C3200-0505 C3200-371 C3400-0262 430084-505 C3400-215 430866-501 CP39136H CP35447 CP85204035 CP60131H CPM-2F CP853345H CP85138 CP35347 430077-523 CP081030-M CP12437 CP30138H CP30338 CP303385H CP35247 CP39236H CP393365H CP40236 CP40247 CP40347 CP50441 CP60231H CP60233 CP60239H CP60240 CP60301540 CP60333 CP603395H CP60340 CP603495H CP60440 CP70437 CP854345H CP854705-2 CP10205033 CP10304033 CP1054033H CP115035335 CP144745325 CP200543636 CP2020405H CP203475H