



SURFACE MOUNT SUPER FAST RECOVERY RECTIFIER

1N4148W THRU BAV16W

VOLTAGE RANGE 75 Volts
CURRENT 1-500 mAmpere

Features

SOD-123FL




- 1N4148W THRU BAV16W
- Surface mount package Ideally Suited for Automatic insertion
- Electrically Identical to Standard JEDEC
- High Conductance
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard



Mechanical Data

- Case: JEDEC SOD-123 mold plastic
Body over glass passivated chip
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode end
- Weight: 0.00063ounce, 0.018grams



Unipolar

Maximum Ratings and Electrical Characteristics

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

TYPE NUMBER	SYMBOLS	1N4148W	BAV16W	UNIT
Marking Code	-	T4	T6	
Reverse Voltage	V_R	75		Volts
Maximum DC Blocking Voltage	V_{DC}	75		Volts
Peak Reverse Voltage	V_{RM}	100		Volts
RMS Voltage	V_{RMS}	50		Volts
Maximum Average Forward Rectified Current at $T_A = 25^\circ\text{C}$	$I_{F(AV)}$	200		mAmps
Peak Forward Surge Current	$t=0.001\text{mS}$	4.0		Amps
	$t=10\text{mS}$	1.5		
	$t=1\text{S}$	0.5		
Power Dissipation Derate Above at 25°C	P_d	250		mW
Maximum Instantaneous Forward Voltage	V_F	0.715@1.0mA 0.855@10mA 1.0@50mA 1.25@150mA	0.715@1.0mA 0.855@10mA 1.0@50mA	Volts
Maximum DC Reverse Current at rated DC blocking voltage at	I_R	0.025@20V 2.5@75V	1.0@75V	μAmps
Junction Capacitance ^(NOTE 2)	C_j	1.5	2.0	pF
Maximum Reverse Recovery Time ^(NOTE 1)	T_{RR}	8		nS
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	625		$^\circ\text{C}/\text{W}$
Operating Junction Temperature	T_J	(-55 to +150)		$^\circ\text{C}$
Storage Temperature Range	T_{STG}	(-55 to +150)		$^\circ\text{C}$

Notes:

1. Reverse Recovery Test Conditions: $I_F=I_R=10\text{mA}$ $I_{rr}=0.1I_R$, $R_L=100\Omega$
2. Measured at 1.0MHz and applied reverse voltage of 0V.



1N4148W THRU BAV16W

VOLTAGE RANGE 75 Volts
CURRENT 1-500 mAmpere

Ratings and Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

FIG.1-FORWARD CHARACTERISTICS

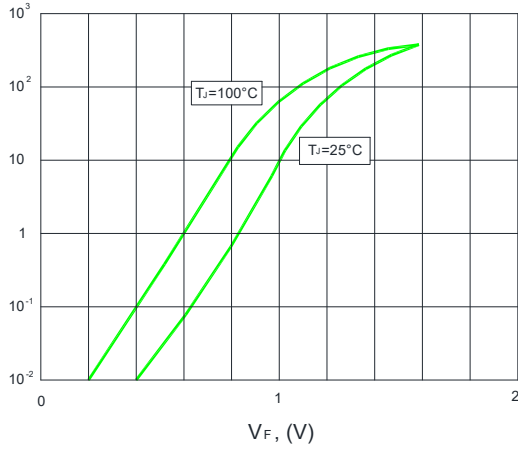


FIG.2-RELATIVE CAPACITANCE VS. REVERSE VOLTAGE

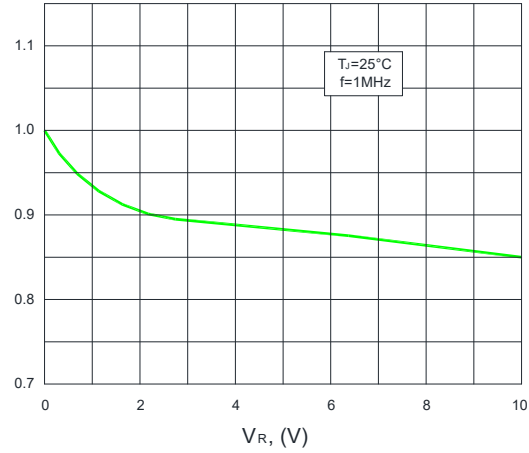


FIG.3-DYNAMIC FORWARD RESISTANCE VS. FORWARD CURRENT

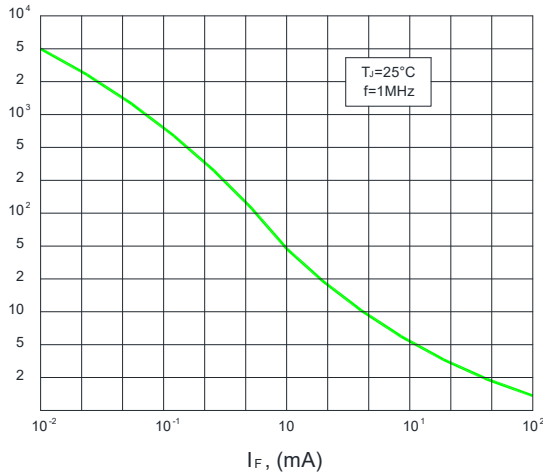


FIG.4-LEAKAGE CURRENT VS. JUNCTION TEMPERATURE

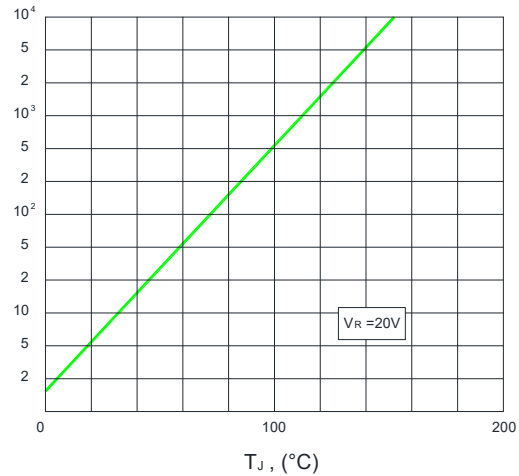


FIG.5-ADMISSIBLE POWER DISSIPATION VS. AMBIENT TEMPERATURE


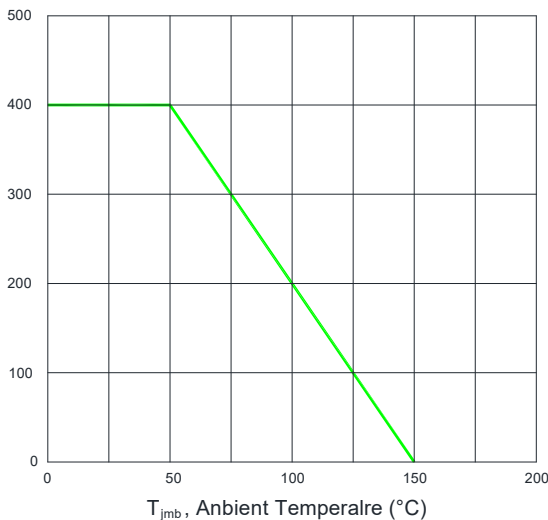


FIG.6-ADMISSIBLE REPETITIVE PEAK FORWARD CURRENT VS. PULSE DURATION




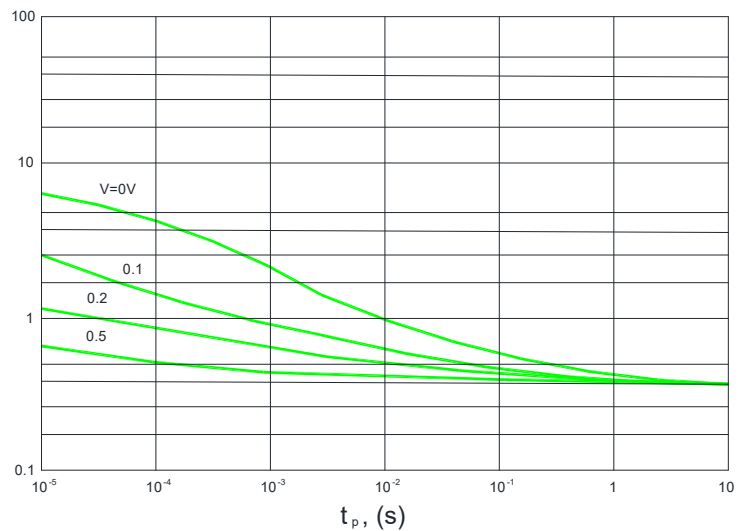

Package Outline Dimensions in inches (millimeters)


SOD-123FL

Unit: mm

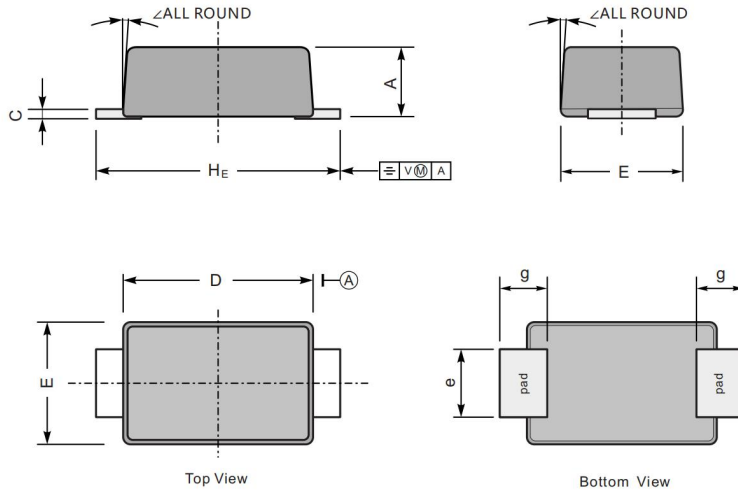

UNIT		A	C	D	E	e	g	H _E	\angle
mm	max	1.1	0.20	2.9	1.9	1.1	0.9	3.8	7°
	min	0.9	0.12	2.6	1.7	0.8	0.7	3.5	
mil	max	43	7.9	114	75	43	35	150	
	min	35	4.7	102	67	31	28	138	


The recommended mounting pad size

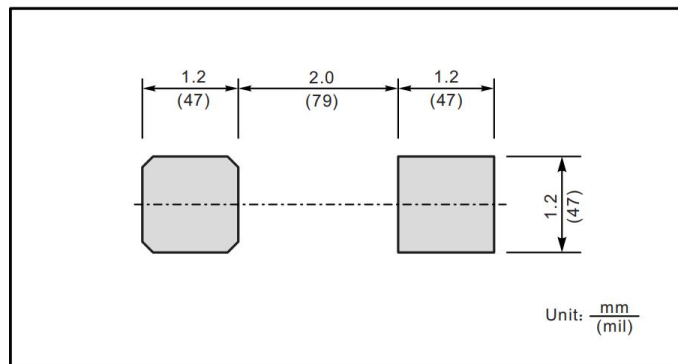

Unit: $\frac{mm}{(mil)}$



Reflow Profile

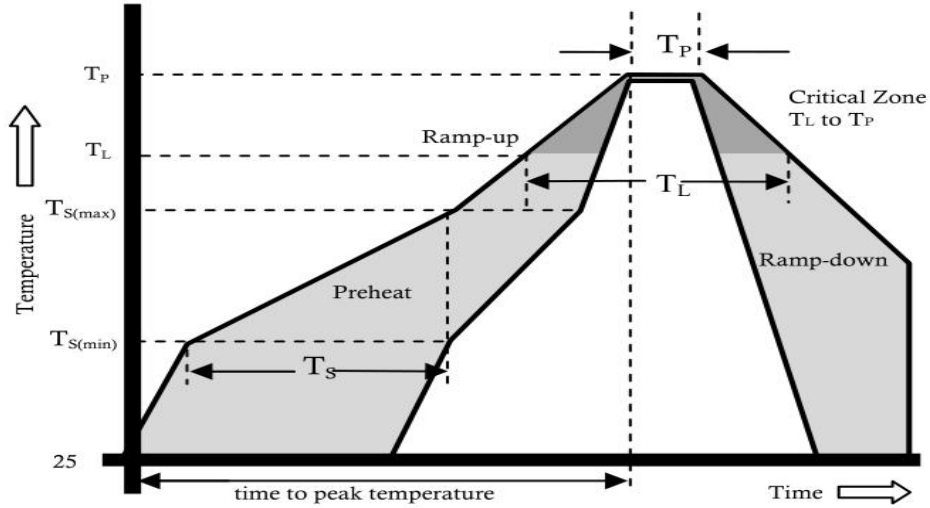

Reflow Condition		Pb-Free Assembly
Pre Heat	Temperature Min.	+150°C
	Temperature Max.	+200°C
	Time(Min to Max)	60-180 secs.
Average ramp up rate(Liquidus Temp(T_L) to peak)		3°C/sec. Max.
$T_S(max)$ to T_L - Ramp-up Rate		3°C/sec. Max.
Reflow	Temperature (T_L)(Liquidus)	+217°C
	Temperature (T_L)	60-150 secs.
Peak Temp (T_P)		+(260+0/-5)°C
Time within 5°C of actual Peak Temp (T_P)		25 secs.
Ramp-down Rate		6°C/sec. Max.
Time 25°C to peak Temp (T_P)		8 min. Max.
Do not exceed		+260°C



1N4148W THRU BAV16W

VOLTAGE RANGE	75 Volts
CURRENT	1-500 mAmpere

Disclaimer

The information presented in this document is for reference only. Chongqing changjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Changjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.czlangjie.com](http://www.czlangjie.com) , or consult your nearest Langjie's sales office for further assistance.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Diodes - General Purpose, Power, Switching category](#):

Click to view products by [LangJie manufacturer](#):

Other Similar products are found below :

[MMBD3004S-13-F](#) [1N3611](#) [NTE156A](#) [NTE6244](#) [1SS400CST2RA](#) [SDAA13](#) [SHN2D02FUTW1T1G](#) [1N4449](#) [1N456A](#) [1N914BTR](#)
[D291S45T](#) [BAS 16-02L E6327](#) [BAS 16-02V H6327](#) [BAS 21U E6327](#) [BAS 28 E6327](#) [BAW56DWQ-7-F](#) [BAW56M3T5G](#) [BAW75-TAP](#)
[MM230L-CAA](#) [IDW40E65D1](#) [JAN1N3600](#) [JAN1N4454UR-1](#) [SMMSD4148T3G](#) [BYW95B/A52A](#) [NSVDAN222T1G](#) [CDSZC01100-HF](#)
[BAV70HDW-7](#) [BAS28-7](#) [JANTX1N6640](#) [BAW56HDW-13](#) [BAS28 TR](#) [VS-HFA04SD60STR-M3](#) [1SS388-TP](#) [BAV99TQ-13-F](#)
[BAV99HDW-13](#) [1N4004](#) [MMDB30-E28X](#) [LS4148](#) [IDV15E65D2](#) [W0503RH200S0L](#) [W0503SH200S0L](#) [M0268SJ200NLF](#)
[M0268RJ200NLF](#) [S3MBF](#) [US1J](#) [DAN217U-TP](#) [SHV-06JNS-Q](#) [IDW30C65D1](#) [IDW80C65D1](#) [VS-HFA30TA60CSR-M3](#)