



PNP General Purpose Amplifier


BC807-16/-25/-40

FEATURES

- Ideally suited for automatic insertion.
- Complementary NPN type available
BC817
- Epitaxial planar die construction.



Lead-free

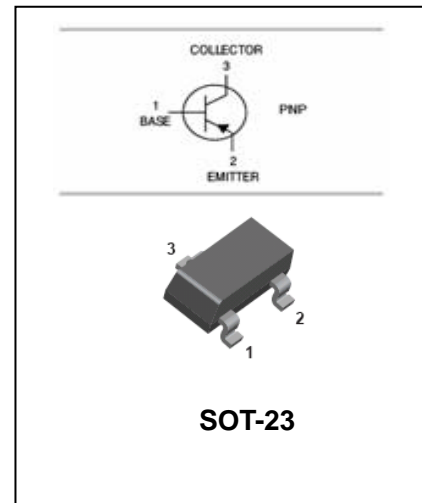

APPLICATIONS

- This device is designed for general purpose amplifier and switching applications at currents to 1.0A.

ORDERING INFORMATION

Type No.	Marking	Package Code
BC807-16	5A	SOT-23
BC807-25	5B	SOT-23
BC807-40	5C	SOT-23

MAXIMUM RATING @ Ta=25°C unless otherwise specified

Symbol	Parameter	Value	Unit
V _{CBO}	Collector-Base Voltage	-50	V
V _{CEO}	Collector-Emitter Voltage	-45	V
V _{EBO}	Emitter-Base Voltage	-5	V
I _C	Collector Current -Continuous	-500	mA
P _D	Total Device Dissipation	300	mW
R _{θjA}	Thermal Resistance Junction to Ambient	417	°C/W
T _j , T _{stg}	Junction and Storage Temperature	-55 to+150	°C

PNP General Purpose Amplifier**BC807-16/-25/-40**

ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

Parameter	Symbol	Test conditions	MIN	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=-10\mu A$ $I_E=0$	-50		V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C=-10mA$ $I_B=0$	-45		V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=-1\mu A$ $I_C=0$	-5		μV
Collector cut-off current	I_{CBO}	$V_{CB}=-45V$ $I_E=0$		-0.1	μA
Collector cut-off current	I_{CEO}	$V_{CE}=-40V$ $I_B=0$		-0.2	μA
Emitter cut-off current	I_{EBO}	$V_{CE}=-4V$ $I_C=0$		-0.1	μA
DC current gain	807-16 807-25 807-40	h_{FE}	100 160 250	250 400 600	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=-500mA$ $I_B=-50mA$		-0.7	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C=-500mA$ $I_B=-50mA$		-1.2	V
Output capacitance	C_{obo}	$V_{CB}=-10V, f=1.0MHz$		10	pF
Transition frequency	f_T	$V_{CE}=-5V, I_C=-10mA$ $f=100MHz$	100		MHz

TYPICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

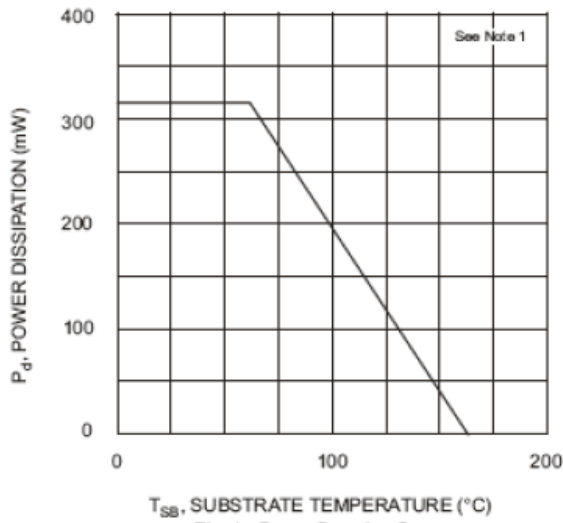


Fig. 1, Power Derating Curve

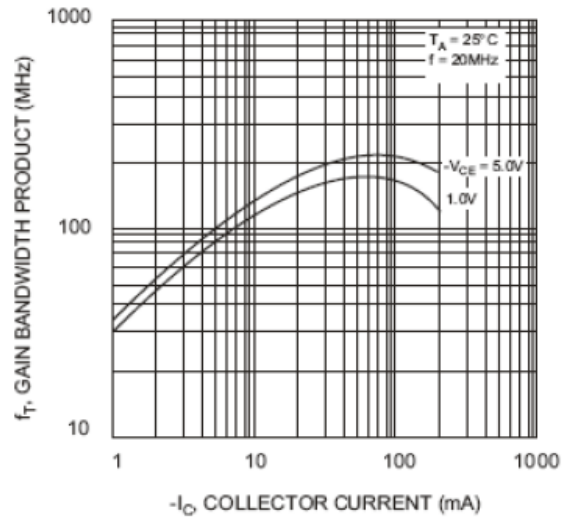


Fig. 2, Gain-Bandwidth Product vs Collector Current

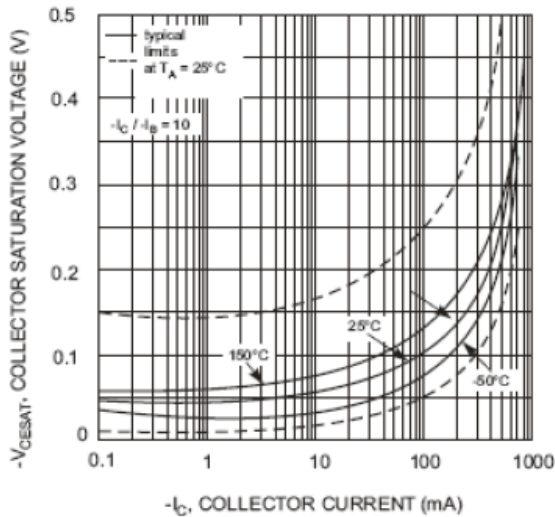


Fig. 3, Collector Sat Voltage vs Collector Current

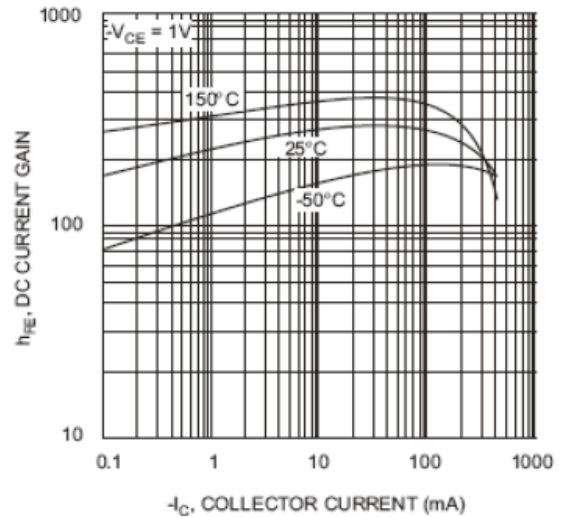


Fig. 4, DC Current Gain vs Collector Current

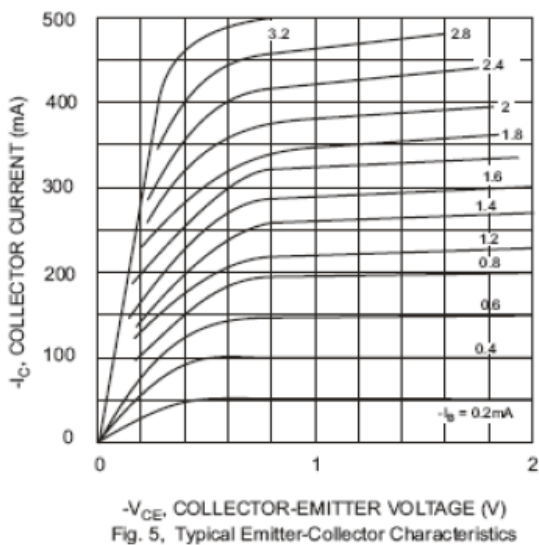


Fig. 5, Typical Emitter-Collector Characteristics

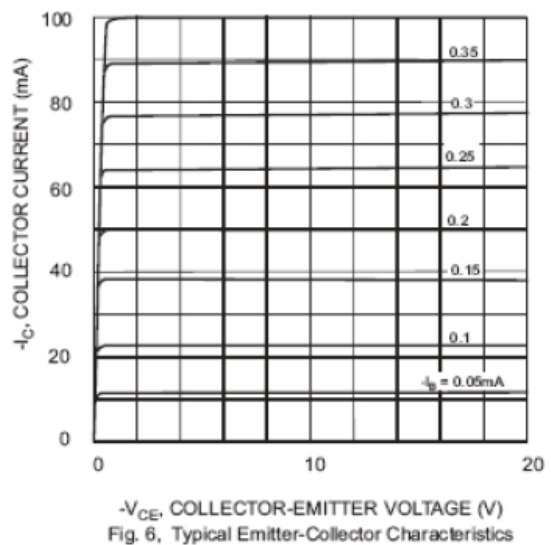


Fig. 6, Typical Emitter-Collector Characteristics


PNP General Purpose Amplifier

BC807-16/-25/-40


PACKAGE OUTLINE

Plastic surface mounted package

SOT-23

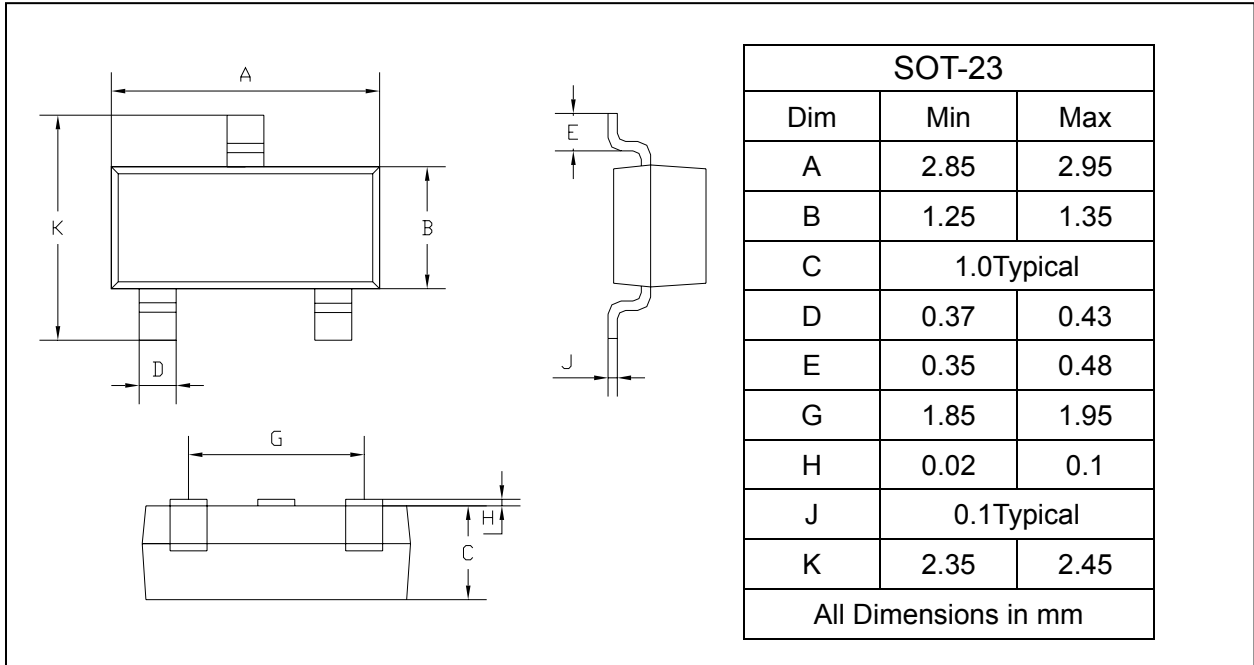

SOLDERING FOOTPRINT

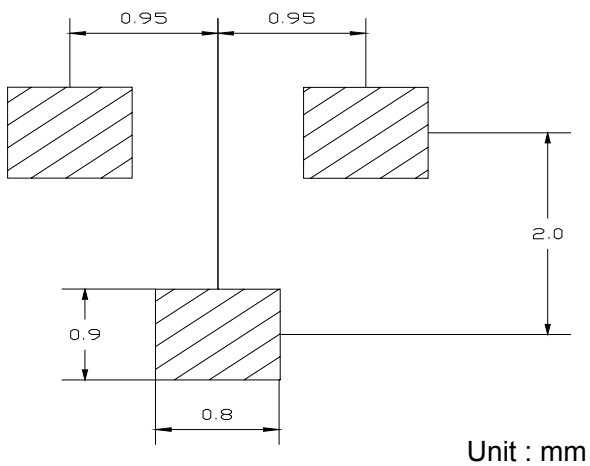

PACKAGE INFORMATION

Device	Package	Shipping
BC807-16/-25/-40	SOT-23	3000/Tape&Reel

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [LangJie manufacturer](#):

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-TL-E](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [MCH6102-TL-E](#) [BC846B-13-F](#) [2N3879](#) [30A02MH-TL-E](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANSR2N2907AUB](#) [CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#) [MMDT3946FL3-7](#) [2N4240](#) [JANS2N3019](#) [MSB30KH-13](#) [2N2221AUB](#) [2SD1815T-TL-E](#) [2N6678](#) [2N2907Ae4](#) [JAN2N3507](#)