



## SOT-23 Encapsulate Adjustable Reference Source

### TL431 Adjustable Accurate Reference Source

#### FEATURES

- The output voltage can be adjusted to 36V
- Low dynamic output impedance ,its typical value is 0.2Ω
- Trapping current capability is 1 to 100mA
- The typical value of the equivalent temperature factor in the whole temperature scope is 50 ppm/°C
- The effective temperature compensation in the working range of full temperature
- Low output noise voltage
- Fast on -state response

SOT-23

1. REFERENCE

2. CATHODE

3. ANODE



#### ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	SYMBOL	VALUE	UNITS
Cathode Voltage	V	37	V
Cathode Current Range (Continuous)	I <sub>KA</sub>	-100-+150	mA
Reference Input Current Range	I <sub>ref</sub>	0.05-+10	mA
Power Dissipation	P <sub>D</sub>	300	mW
Operating temperature	T <sub>opr</sub>	0-70	°C
Storage temperature Range	T <sub>stg</sub>	-65-+150°C	°C

#### ELECTRICAL CHARACTERISTICS (T<sub>amb</sub>=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Reference Input Voltage	V	V <sub>KA</sub> =V <sub>REF</sub> , I <sub>KA</sub> =10mA	2.450	2.5	2.550	V
Deviation of reference input Voltage Over temperature (note)	$\Delta V_{ref} / \Delta T$	V <sub>KA</sub> =V <sub>REF</sub> , I <sub>KA</sub> =10mA T <sub>min</sub> ≤T <sub>a</sub> ≤T <sub>max</sub>		4.5	17	mV
Ratio Of Change in Reference Input Voltage to the change in Cathode Voltage	$\Delta V_{ref} / \Delta V_{KA}$	$\Delta V_{KA} = 10V \sim V_{REF}$		-1.0	-2.7	m V/V
		$\Delta V_{KA} = 36V \sim 10V$		-0.5	-2.0	m V/V
Reference Input Current	I <sub>ref</sub>	I <sub>KA</sub> = 10mA, R=10KΩ R <sub>2</sub> =∞		1.5	4	μA
Deviation Of Reference Input Current Over Full Temperature Range	$\Delta I_{ref} / \Delta T$	I <sub>KA</sub> =10mA, R=10KΩ R=∞ T <sub>amb</sub> =full Temperature		0.4	1.2	μA
Minimum cathode current for regulation	I <sub>KA(min)</sub>	V <sub>KA</sub> =V <sub>REF</sub>		0.45	1.0	mA
Off-state cathode Current	I <sub>KA(OFF)</sub>	V <sub>KA</sub> =36V, V <sub>REF</sub> =0		0.05	1.0	μA
Dynamic Impedance	Z <sub>KA</sub>	V <sub>KA</sub> =V <sub>REF</sub> , I <sub>KA</sub> =1 to 100mA f≤1.0KHz		0.15	0.5	Ω

Note: T<sub>MIN</sub> =0°C, T<sub>MAX</sub> =+70°C







#### CLASSIFICATION OF V<sub>ref</sub>

Rank	0.5%
Range	2.487-2.512



### Typical Characteristics

TL431

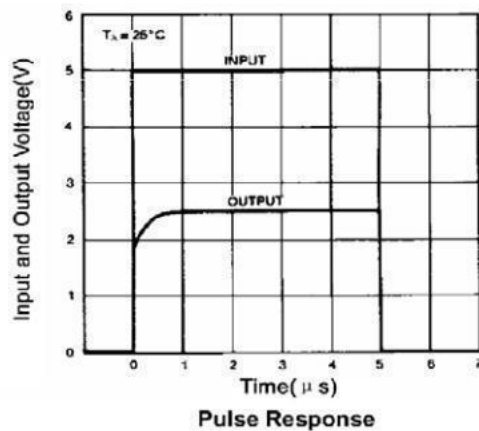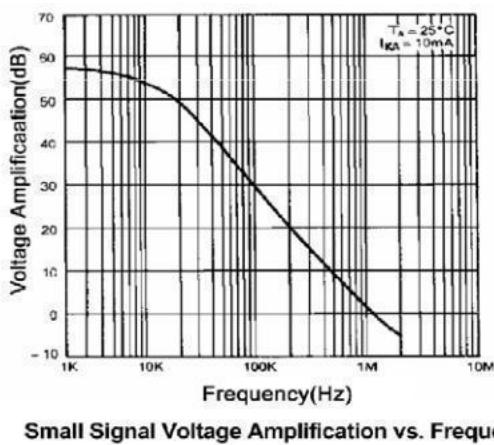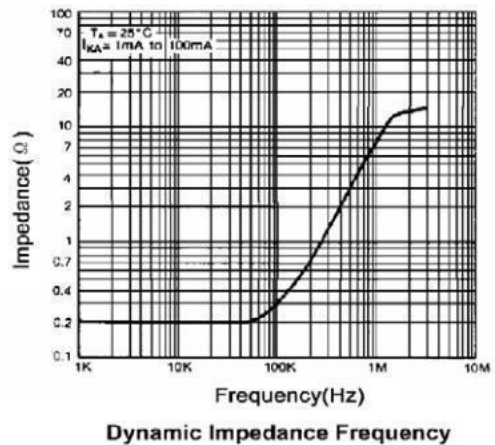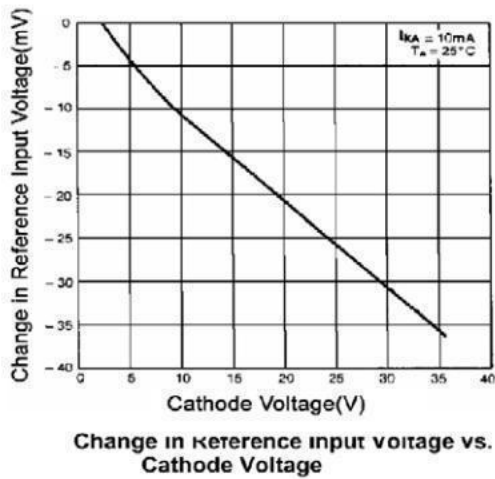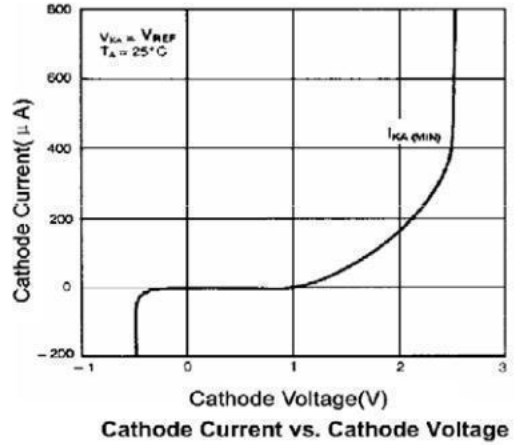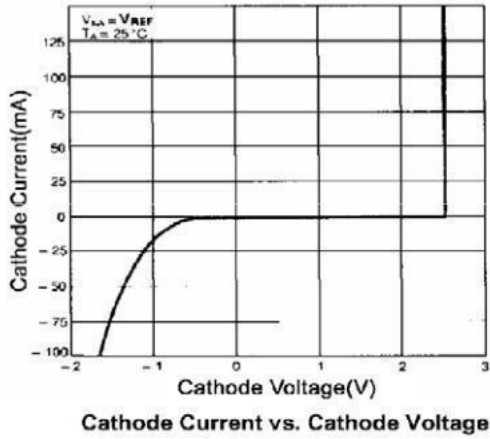

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Voltage References](#) category:*

*Click to view products by [LangJie](#) manufacturer:*

Other Similar products are found below :

[5962-8686103XC](#) [LT1021DCS8-5PBF](#) [LT1236AIS8-10PBF](#) [LTC6655CHMS8-2.048PBF](#) [MSB-T](#) [REF01J/883](#) [LM4040B25QFTA](#)  
[NJM2823F-TE1](#) [EL5226IR](#) [EL5326IR](#) [EL5326IRZ](#) [ISL21007DFB825Z](#) [ISL21009BFB812Z](#) [ISL21009CFB812Z](#) [ISL60002BIH312](#)  
[TS3320AMR](#) [TS3325AMR](#) [TS3330AMR](#) [TS3333AMR](#) [X60003CIG3-41](#) [X60003DIG3Z-41T1](#) [X60250V8I](#) [REF3025TB-GT3](#)  
[SC432BVSNT1G](#) [TL431CPG](#) [ADR4520ARZ-R7](#) [ADR4533BRZ-R7](#) [LT1027CCS8-5#TRPBF](#) [REF35102QDBVR](#) [AD587KRZ-REEL](#)  
[ADR425ARZ-REEL7](#) [CA-HP6025S](#) [CA-HP6041S](#) [JTL431A](#) [TLVH431NAQDBZRR](#) [REF2033QDDCRQ1](#) [REF35330QDBVR](#)  
[LT1236BCS8-5#TRPBF](#) [ADR435BRMZ-REEL7](#) [CA-HP6050S](#) [TL431](#) [BR431RM](#) [MSR025](#) [MC1403BN](#) [LM285Z-2.5](#) [LM385B-ADJ](#)  
[LM385B-2.5](#) [HT385R-1.2](#) [HT336R-2.5](#) [RS3450XH6-Q1](#)