




贴片保险丝(抗浪涌型)

SMD Fuse (High Inrush Current Withstand) 63V/32V

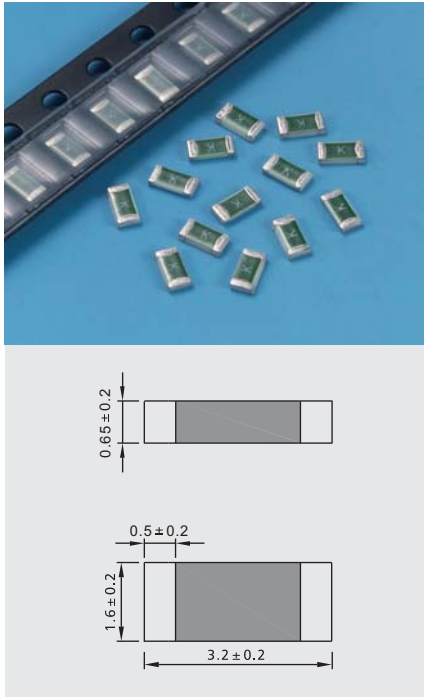

测试标准:

Testing Standard:
UL248-1 UL248-14

额定分断能力:

Interrupting Rating:
50 Amperes at 63V DC(1A~4A)
100 Amperes at 32V DC(5A)

工作温度:

Operating Temperature:
-55°C ~ +125°C

材料:

Materials:
Substrate:ceramic/glass cover
Termination:sliver over-plated with nickel and tin
Element:silver


焊接方法:

Soldering Method:
Wave soldering: 260°C, 10s max

包装:

Packaging:
Automaton taped 3000PCS per roll,
90000PCS per carton

Time-Current Characteristics
电流-时间曲线图

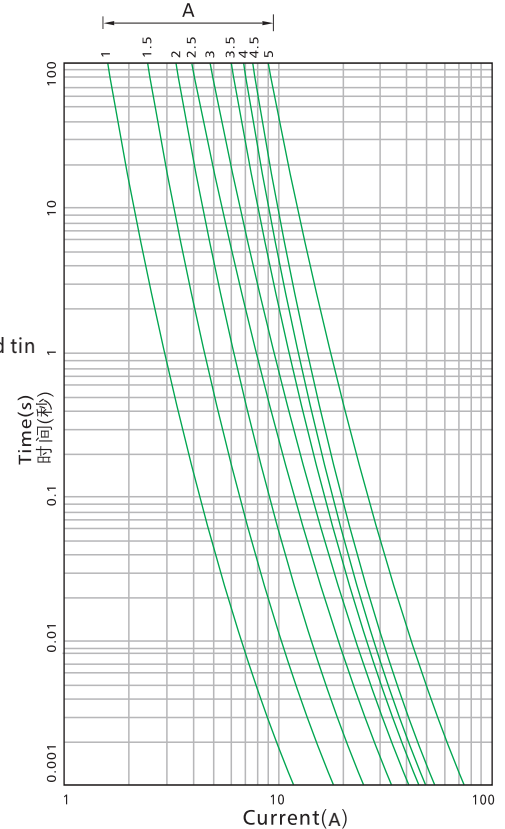

电气特性: Electrical Characteristics

额定电流 Ampere Rating	额定电流的% % of Ampere Rating	熔断时间 Opening Time
1A~5A	100%	4 hours Min(大于4小时)
1A~5A	250%	5 s Max(小于5秒)
1A~5A	300%	0.1 s ~ 3 s
1A~5A	1000%	0.2 ms ~ 20 ms

目录编号: Catalog No.C:63V D:32V

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	标示 Marking	熔化热能 ² T Melting Integral (A ² .S)	认证 Approvals
					● 表示已获认证 ● 表示认证中
12H1100C	1A	63V	H	0.19	●
12H1150C	1.5A	63V	K	0.47	●
12H1200C	2A	63V	N	1.63	●
12H1250C	2.5A	63V	O	1.81	●
12H1300C	3A	63V	P	2.79	●
12H1350C	3.5A	63V	R	2.95	●
12H1400C	4A	63V	S	3.8	●
12H1500D	5A	32V	T	6.3	●

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Surface Mount Fuses](#) category:

Click to view products by [lanson](#) manufacturer:

Other Similar products are found below :

[FHC20402ADTP](#) [NFVC6125S0R50TRF](#) [SFT-125MA](#) [TF16SN2.00TTD](#) [FCC16501ABTP](#) [FCC16102ABTP](#) [FHC16322ADTP](#) [0308.250UR](#)
[0308.375UR](#) [0308.750UR](#) [0308001.UR](#) [030801.5UR](#) [F0603G0R03FNTR](#) [SKY87604-12](#) [SKY87604-11](#) [SKY87604-13](#) [R451003.L](#)
[R451.500L](#) [R451001.L](#) [3-103-119](#) [3-103-123](#) [CF12V6T2R0](#) [ABB-A 25A 500V](#) [PSFB-1.6A](#) [PSFB-2.5A](#) [PSFA-1.6A](#) [PSFB-1A](#) [2410FA-5A](#)
[SGB401](#) [SGB075](#) [MTS2200A](#) [0154002.DRL](#) [0154008.DRL](#) [0154.500DRL](#) [189140.1,25](#) [189140.0,8](#) [189140.0,4](#) [189140.0,63](#) [189140.0,25](#)
[0402FA-R200](#) [0402SFF150F/24-2](#) [0435.250KRHFS](#) [0468003.WR](#) [0494001.NRHF](#) [0494002.NRHF](#) [0494003.NRHF](#) [049402.5NRHF](#)
[049403.5NRHF](#) [0494.250NRHF](#) [0494.375NRHF](#)