



# 2D $\Phi 3 \times 7$ RoHS Compliant

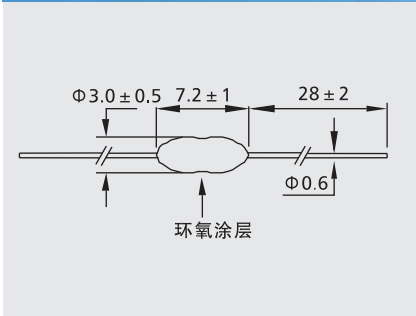

## 超小型保险丝(快断型)

### Micro Fuse (Fast-Acting) 250V/125V

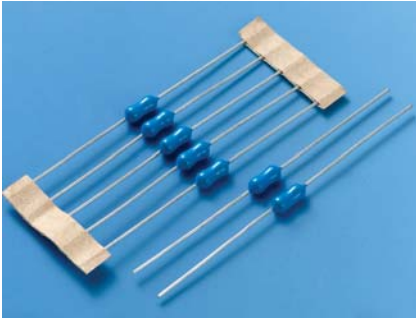

**测试标准:**

**Testing Standard:**  
UL248-1 UL248-14

**额定分断能力:**

**Interrupting Rating:**  
50 Amperes at 125V AC  
50 Amperes at 250V AC

**工作温度:**

**Operating Temperature:**  
-55°C ~ +125°C


**材料:**

**Materials:**  
End cap: nickel plated brass  
Ceramic tube: ceramic  
Lead wire: tinned copper wire  
Coat: epoxy resin

**焊接方法:**

**Soldering Method:**  
Wave soldering: 260°C, 10s max  
Manual soldering: 350°C, 5s max

Time-Current Characteristics  
电流-时间曲线图

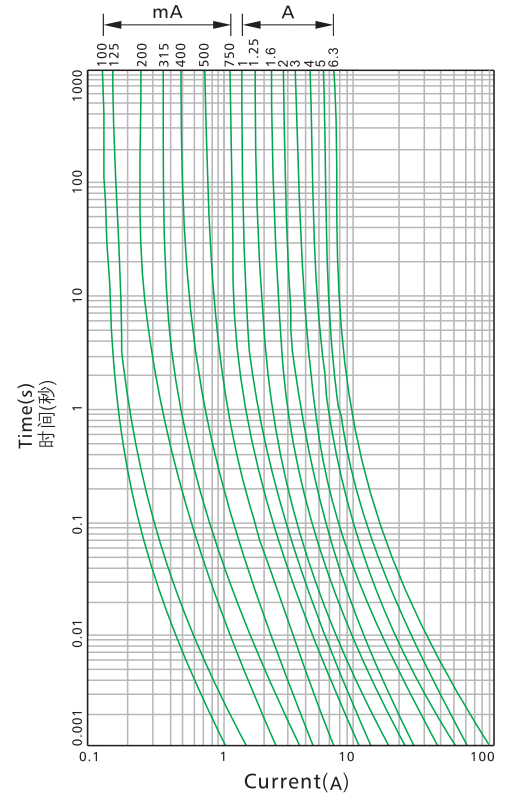

**电气特性: Electrical Characteristics**

额定电流的% % of Ampere Rating	熔断时间 Opening Time
100%	4 hours Min (大于4小时)
200%	60 s Max (小于60秒)

目录编号: Catalog No.A:250V B:125V

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	熔化热能 <sup>2</sup> Melting Integral (A <sup>2</sup> .S)	认证 Approvals		
				UL	UL	CCC
2D0125A/B	125mA	250V/125V	0.002	●	●	
2D0160A/B	160mA	250V/125V	0.003	●	●	
2D0200A/B	200mA	250V/125V	0.006	●	●	
2D0250A/B	250mA	250V/125V	0.012	●	●	●
2D0315A/B	315mA	250V/125V	0.019	●	●	●
2D0400A/B	400mA	250V/125V	0.035	●	●	●
2D0500A/B	500mA	250V/125V	0.047	●	●	●
2D0630A/B	630mA	250V/125V	0.056	●	●	●
2D0750A/B	750mA	250V/125V	0.078	●	●	●
2D0800A/B	800mA	250V/125V	0.098	●	●	●
2D1100A/B	1A	250V/125V	0.3	●	●	●
2D1125A/B	1.25A	250V/125V	0.5	●	●	●
2D1150A/B	1.5A	250V/125V	0.6	●	●	●
2D1160A/B	1.6A	250V/125V	0.8	●	●	●
2D1200A/B	2A	250V/125V	1.2	●	●	●
2D1250A/B	2.5A	250V/125V	2.0	●	●	●
2D1300A/B	3A	250V/125V	2.5	●	●	●
2D1315A/B	3.15A	250V/125V	2.9	●	●	●
2D1350A/B	3.5A	250V/125V	3.1	●	●	●
2D1400A/B	4A	250V/125V	4.2	●	●	●
2D1500A/B	5A	250V/125V	7.2	●	●	●
2D1630A/B	6.3A	250V/125V	12	●	●	●

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fuses with Leads - Through Hole](#) category:*

*Click to view products by [lanson](#) manufacturer:*

Other Similar products are found below :

[89096-013](#) [89096-015](#) [203004](#) [252001](#) [252010](#) [25202.5](#) [252.062](#) [263.500](#) [265.750](#) [272.005](#) [273.600V](#) [274.250](#) [SR-5H-5A-BK](#) [SS-5-800MA-AP](#) [SS-5F-3.15A-AP](#) [252004](#) [263.750](#) [273.005](#) [3701630000](#) [LKB-3](#) [0473004.MAT1L](#) [RST 2-BULK](#) [0473001.HAT1L](#) [0473002.HAT1L](#) [0473.500HAT1L](#) [SS-5-1.6A-AP](#) [SS-5F-2.5A-AP](#) [SR-5H-2.5A-AP](#) [SS-5-6.3A-BK](#) [SR-5H-4A-AP](#) [RST 5-AMMO](#) [SR-5H-3.15A-BK](#) [SR-5H-2A-BK](#) [RSTA 2 AMMO](#) [89096-005](#) [SR-5F-1-6A-BK](#) [SS-5FH-3.15A-AP](#) [SS-5-630MA-AP](#) [047301.5HAT1L](#) [3721100041](#) [SS-5H-1-25A-APH](#) [SR-5H-800MA-APH](#) [0034.722](#) [34.732](#) [22D03-200](#) [GFA-4](#) [0697A8000-01](#) [0697A9100-01](#) [008307X](#) [008313C](#)