




# 2E $\Phi 3 \times 7$ RoHS Compliant



## 超小型保险丝(延时型)

### Micro Fuse(Time-Lag)250V/125V

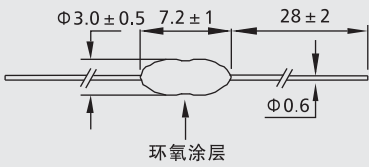

测试标准:  
Testing Standard:  
UL248-1 UL248-14


额定分断能力:  
Interrupting Rating:  
50 Amperes at 125V AC  
50 Amperes at 250V AC

工作温度:  
Operating Temperature:  
-55°C ~ +125°C

材料:  
Materials:  
End cap:nickel plated brass  
Ceramic tube:ceramic  
Lead wire:tinned copper wire  
Coat:epoxy resin

焊接方法:  
Soldering Method:  
Wave soldering: 260°C, 10s max  
Manual soldering: 350°C, 5s max

Time-Current Characteristics  
电流-时间曲线图

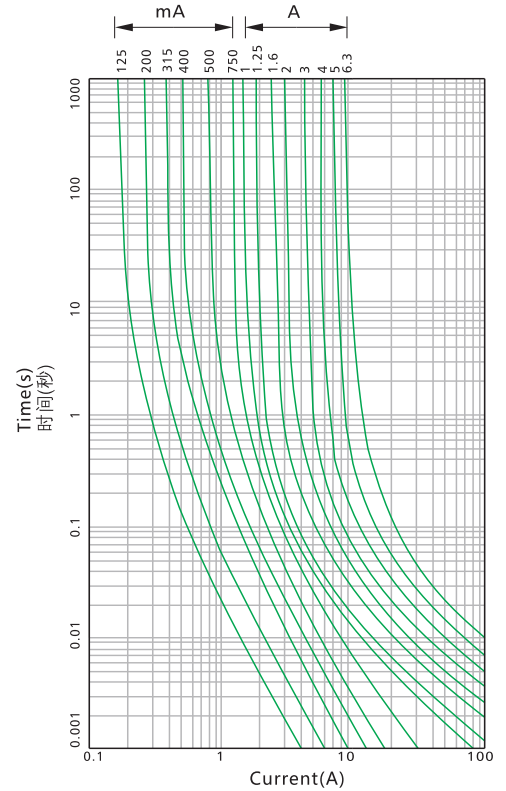

#### 电气特性: Electrical Characteristics

| 额定电流的% % of Ampere Rating | 熔断时间 Opening Time   |
|---------------------------|---------------------|
| 100%                      | 4 hours Min (大于4小时) |
| 200%                      | 60 s Max (小于60秒)    |
| 1000%                     | 10 ms Min (大于10毫秒)  |

目录编号: Catalog No.A:250V B:125V

| 目录编号<br>Catalog No. | 额定电流<br>Ampere Rating | 额定电压<br>Voltage Rating | 熔化热能 <sup>2</sup><br>Melting Integral (A <sup>2</sup> .S) | 认证 Approvals |     |     |     |         |     |     |
|---------------------|-----------------------|------------------------|---|--------------|-----|-----|-----|---------|-----|-----|
|                     |                       |                        |   | UL           | cUL | VDE | CQC | PSE/JET | TUV | CCC |
| 2E0125A/B           | 125mA                 | 250V/125V              | 0.020   | ●            | ●   |     |     | ●       |     |     |
| 2E0160A/B           | 160mA                 | 250V/125V              | 0.040   | ●            | ●   |     |     | ●       |     |     |
| 2E0200A/B           | 200mA                 | 250V/125V              | 0.006   | ●            | ●   | ●   | ●   | ●       | ●   | ●   |
| 2E0250A/B           | 250mA                 | 250V/125V              | 0.09  | ●            | ●   | ●   | ●   | ●       | ●   | ●   |
| 2E0315A/B           | 315mA                 | 250V/125V              | 0.15  | ●            | ●   | ●   | ●   | ●       | ●   | ●   |
| 2E0400A/B           | 400mA                 | 250V/125V              | 0.31  | ●            | ●   | ●   | ●   | ●       | ●   | ●   |
| 2E0500A/B           | 500mA                 | 250V/125V              | 0.46  | ●            | ●   | ●   | ●   | ●       | ●   | ●   |
| 2E0630A/B           | 630mA                 | 250V/125V              | 0.78  | ●            | ●   | ●   | ●   | ●       | ●   | ●   |
| 2E0750A/B           | 750mA                 | 250V/125V              | 0.93  | ●            | ●   |     |     | ●       |     |     |
| 2E0800A/B           | 800mA                 | 250V/125V              | 1.1   | ●            | ●   | ●   | ●   | ●       | ●   | ●   |
| 2E1100A/B           | 1A                    | 250V/125V              | 1.3   | ●            | ●   | ●   | ●   | ●       | ●   | ●   |
| 2E1125A/B           | 1.25A                 | 250V/125V              | 2.6   | ●            | ●   | ●   | ●   | ●       | ●   | ●   |
| 2E1150A/B           | 1.5A                  | 250V/125V              | 3.1   | ●            | ●   |     |     | ●       |     |     |
| 2E1160A/B           | 1.6A                  | 250V/125V              | 3.9   | ●            | ●   |     |     | ●       |     |     |
| 2E1200A/B           | 2A                    | 250V/125V              | 7.2   | ●            | ●   | ●   | ●   | ●       | ●   | ●   |
| 2E1250A/B           | 2.5A                  | 250V/125V              | 12  | ●            | ●   | ●   | ●   | ●       | ●   | ●   |
| 2E1300A/B           | 3A                    | 250V/125V              | 15  | ●            | ●   |     |     | ●       |     |     |
| 2E1315A/B           | 3.15A                 | 250V/125V              | 19  | ●            | ●   | ●   | ●   | ●       | ●   | ●   |
| 2E1350A/B           | 3.5A                  | 250V/125V              | 24  | ●            | ●   |     |     | ●       |     |     |
| 2E1400A/B           | 4A                    | 250V/125V              | 29  | ●            | ●   | ●   | ●   | ●       | ●   | ●   |
| 2E1500A/B           | 5A                    | 250V/125V              | 59  | ●            | ●   |     |     | ●       | ●   |     |
| 2E1630A/B           | 6.3A                  | 250V/125V              | 90  | ●            | ●   |     |     | ●       | ●   |     |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fuses with Leads - Through Hole](#) category:*

*Click to view products by [lanson](#) manufacturer:*

Other Similar products are found below :

[89096-013](#) [89096-015](#) [203004](#) [252001](#) [252010](#) [25202.5](#) [252.062](#) [263.500](#) [265.750](#) [272.005](#) [273.600V](#) [274.250](#) [SR-5H-5A-BK](#) [SS-5-800MA-AP](#) [SS-5F-3.15A-AP](#) [252004](#) [263.750](#) [273.005](#) [3701630000](#) [LKB-3](#) [0473004.MAT1L](#) [RST 2-BULK](#) [0473001.HAT1L](#) [0473002.HAT1L](#) [0473.500HAT1L](#) [SS-5-1.6A-AP](#) [SS-5F-2.5A-AP](#) [SR-5H-2.5A-AP](#) [SS-5-6.3A-BK](#) [SR-5H-4A-AP](#) [RST 5-AMMO](#) [SR-5H-3.15A-BK](#) [SR-5H-2A-BK](#) [RSTA 2 AMMO](#) [89096-005](#) [SR-5F-1-6A-BK](#) [SS-5FH-3.15A-AP](#) [SS-5-630MA-AP](#) [047301.5HAT1L](#) [3721100041](#) [SS-5H-1-25A-APH](#) [SR-5H-800MA-APH](#) [0034.722](#) [34.732](#) [22D03-200](#) [GFA-4](#) [0697A8000-01](#) [0697A9100-01](#) [008307X](#) [008313C](#)