


2Ε Φ3×7 RoHS Compliant



超小型保险丝(延时型)

Micro Fuse(Time-Lag)250V/125V





测试标准: Testing Standard:

UL248-1 UL248-14

额定分断能力: Interrupting Rating: 50 Amperes at 125V AC 50 Amperes at 250V AC

Operating Temperature: -55℃ ~+125℃

材料: Materials:

End cap:nickel plated brass Ceramic tube:ceramic Lead wire:tinned copper wire Coat:epoxy resin

焊接方法: Soldering Method:


Wave soldering: 260°C, 10s max Manual soldering: 350°C, 5s max

电气特性: Electrical Characteristics

额定电流的% % of Ampere Rating	熔断时间 Opening Time
100%	4 hours Min(大于4小时)
200%	60 s Max (小于60秒)
1000%	10 ms Min (大于10毫秒)

目录编号: Catalog No.A:250V B:125V											
目录编号 Catalog	额定电流 Ampere	额定电压 Voltage	熔化热能l ² T Melting Integral-				认证 Approvals		● 表示已获认证 ● 表示认证中		
No.	Rating	Rating	(A ² .S)	(U)	·(I)	VDE	cac	J T	A TUV		
2E0125A/B	125mA	250V/125V	0.020	•	•			•			
2E0160A/B	160mA	250V/125V	0.040	•	•			•			
2E0200A/B	200mA	250V/125V	0.006	•	•	•	•	•	•	•	
2E0250A/B	250mA	250V/125V	0.09	•	•	•	•	•	•	•	
2E0315A/B	315mA	250V/125V	0.15	•	•	•	•	•	•	•	
2E0400A/B	400mA	250V/125V	0.31	•	•	•	•	•	•	•	
2E0500A/B	500mA	250V/125V	0.46	•	•	•	•	•	•	•	
2E0630A/B	630mA	250V/125V	0.78	•	•	•	•	•	•	•	
2E0750A/B	750mA	250V/125V	0.93	•	•			•			
2E0800A/B	800mA	250V/125V	1.1	•	•	•	•	•	•	•	
2E1100A/B	1A	250V/125V	1.3	•	•	•	•	•	•	•	
2E1125A/B	1.25A	250V/125V	2.6	•	•	•	•	•	•	•	
2E1150A/B	1.5A	250V/125V	3.1	•	•			•			
2E1160A/B	1.6A	250V/125V	3.9	•	•		•	•	•	•	
2E1200A/B	2A	250V/125V	7.2	•	•	•	•	•	•	•	
2E1250A/B	2.5A	250V/125V	12	•	•	•	•	•	•	•	
2E1300A/B	3A	250V/125V	15	•	•			•			
2E1315A/B	3.15A	250V/125V	19	•	•	•	•	•	•	•	
2E1350A/B	3.5A	250V/125V	24	•	•			•			
2E1400A/B	4A	250V/125V	29	•	•	•	•	•	•	•	
2E1500A/B	5A	250V/125V	59	•	•			•	•		
2E1630A/B	6.3A	250V/125V	90	•	•			•	•		

Time-Current Characteristics 电流-时间曲线图

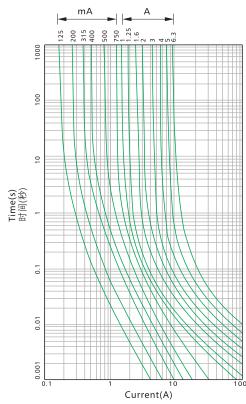

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Fuses with Leads - Through Hole category:

Click to view products by lanson manufacturer:

Other Similar products are found below:

89096-013 89096-015 203004 252001 252010 25202.5 252.062 263.500 265.750 272.005 273.600V 274.250 SR-5H-5A-BK SS-5800MA-AP SS-5F-3.15A-AP 252004 263.750 273.005 3701630000 LKB-3 0473004.MAT1L RST 2-BULK 0473001.HAT1L
0473002.HAT1L 0473.500HAT1L SS-5-1.6A-AP SS-5F-2.5A-AP SR-5H-2.5A-AP SS-5-6.3A-BK SR-5H-4A-AP RST 5-AMMO SR-5H3.15A-BK SR-5H-2A-BK RSTA 2 AMMO 89096-005 SR-5F-1-6A-BK SS-5FH-3.15A-AP SS-5-630MA-AP 047301.5HAT1L 3721100041
SS-5H-1-25A-APH SR-5H-800MA-APH 0034.722 34.732 22D03-200 GFA-4 0697A8000-01 0697A9100-01 008307X 008313C