


5N  $\Phi 5.2 \times 20$  RoHS Compliant



陶瓷保险丝管(延时型)

Ceramic Tube Fuse (Time-Lag) 250V

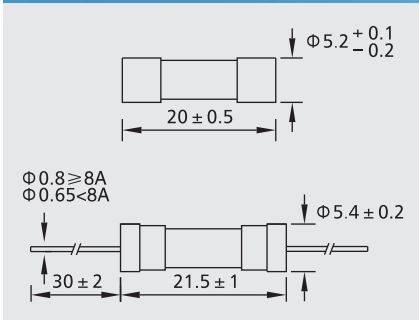

测试标准:  
Testing Standard:  
IEC60127-1 IEC60127-2 GB9364.1 GB9364.2


额定分断能力:  
Interrupting Rating:  
1500 Amperes at 250V AC

工作温度:  
Operating Temperature:  
-55°C ~ +125°C

材料:  
Materials:  
End cap: nickel plated brass  
Ceramic tube: ceramic  
Lead wire: tinned copper wire  
Inner cap: nickel plated brass

焊接方法:  
Soldering Method:  
Wave soldering: 260°C, 10s max  
Manual soldering: 350°C, 5s max

Time-Current Characteristics  
电流-时间曲线图

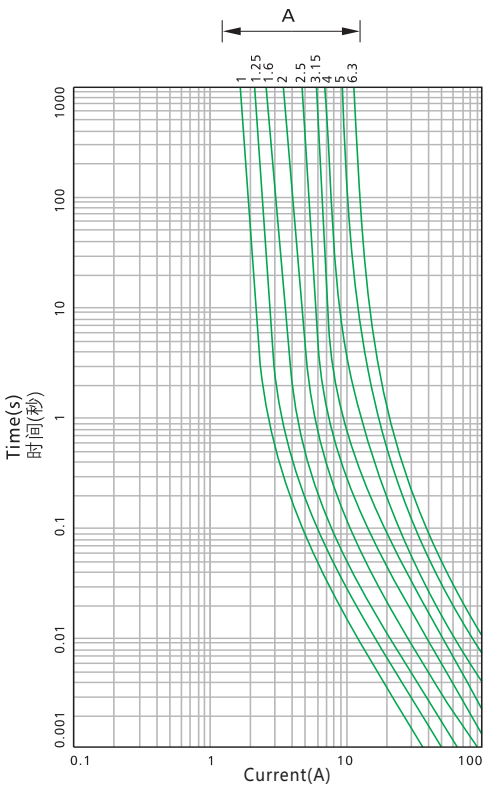

电气特性: Electrical Characteristics

额定电流的% % of Ampere Rating	熔断时间 Opening Time (1A~3.15A)	熔断时间 Opening Time (4A~6.3A)
210%	30 min Max ( 小于30分钟 )	30 min Max ( 小于30分钟 )
275%	750ms~80s	750 ms~80 s
400%	95ms~5s	150 ms~5 s
1000%	10ms~150ms	20 ms~150 ms

目录编号: Catalog No.A:250V 带引线产品目录编号后加"P":Suffix"P"for Lead Type After Catalog No.

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	最大电压降(mv) Max Voltage Drop	熔化热能 <sup>2</sup> T Melting Integral (A <sup>2</sup> .S)	认证 Approvals				
					UL	DVE	CCC	S	K
5N1100A	1A	250V	350	1.2	●	●	●	●	●
5N1125A	1.25A	250V	300	2.5	●	●	●	●	●
5N1160A	1.6A	250V	200	3.6	●	●	●	●	●
5N1200A	2A	250V	190	7.6	●	●	●	●	●
5N1250A	2.5A	250V	180	13	●	●	●	●	●
5N1315A	3.15A	250V	140	25	●	●	●	●	●
5N1400A	4A	250V	100	40	●	●	●	●	●
5N1500A	5A	250V	100	67	●	●	●	●	●
5N1630A	6.3A	250V	100	110	●	●	●	●	●

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Cartridge Fuses](#) category:*

*Click to view products by [lanson](#) manufacturer:*

Other Similar products are found below :

[5ST250MA-R](#) [5TT3A-R](#) [5TT8A-R](#) [MBO-20](#) [MDM-4/10](#) [MDQ-V-15/100](#) [MDX-1-6/10](#) [MDX-2](#) [MDX-3-2/10](#) [MDX-6-1/4](#) [FLSR-15](#)  
[FLSR-30](#) [FRS-1-1/4](#) [FRS-1-6/10](#) [FRS-4/10](#) [H362003](#) [ABC-2](#) [1/2A](#) [12C10X38GI](#) [AGC-15EX](#) [AGC-V-3-12-R](#) [AGY-50](#) [15019-G](#) [MSL-1-](#)  
[1/2](#) [MSL-1-1/4](#) [MSL-1/2](#) [MSL-1/4](#) [MSL-3](#) [MSL-3/4](#) [MSL-4](#) [MSL-5](#) [BK1/C436-2A](#) [BK1-GMA-1-6-R](#) [BK1-S505-1-R](#) [BK1-S506-3-15-R](#)  
[BK/C515S-250-R](#) [S501-V-10A](#) [301030](#) [303030](#) [FLA10](#) [FLA-4/10](#) [FLNR-5](#) [20.0M6.3X32F](#) [GBB-17-1/2](#) [301001](#) [301020](#) [311008](#)  
[31301.5H-XP](#) [313.25](#) [313.75](#)